


Technical data sheet

Wiring trunking VF 40, flexible

Art.-Nr. 6132610

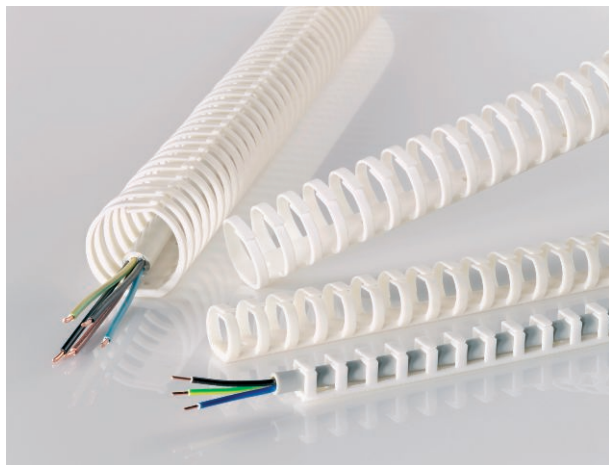

Flexible VF trunking wiring made of halogen-free PP. Available with or without adhesive tape. With base perforation as standard.

PP Polypropylene

Additional product text, instruction	Direct mounting on the wall via the integrated base perforation (with double-sided adhesive tape as mounting aid). Flame-retardant and self-extinguishing after removal of an active flame. The retainers in the trunking base can be broken out without tools.
Product text, standards	Tested to DIN EN 50085-2-3.
Product text, scope of delivery	Base and cover in set.

Master data

Item no.	6132610
Type	VF 40KB rws
Description 1	Slotted cable trunking system
Description 2	VF flex 40 mm adh. 9010
Colour	Pure white
RAL number	9010
Material	Polypropylene
Material symbol	PP
Smallest sales unit	2,00 Piece
Weight	8,00 kg/100 pc.

Technical data

Length	500,00 mm
Width	45,00 mm
Height	48,00 mm
Diameter	40,00 mm
Side wall version	Slotted
Fastening type	Self-adhesive and base perforation
Flexible	☒
Creepage current-resistant	☒
With cover	☐
Usable cross-section	1.440,00 mm ²
Halogen-free	☒
Slot spacing	13,00 mm
Slot width	8,00 mm
Self-extinguishing	☒