




Base module;connection to SmartWire-DT

Part no. **SL7-SWD**
Catalog No. **171459**
Alternate Catalog No. **SL7-SWD**
EL-Nummer (Norway) **4137714**

Delivery program

Product range		SL signal towers
Basic function		Base module
Product range		SmartWire-DT slave
Subrange		SmartWire-DT Signal towers
Connection technique		Blade terminal SWD4-8MF2
Mounting type		for horizontal mounting
Fitted with		Base with base adapter for slipping onto place (rapid mounting and wiring system) including cover
Tube length		100 mm
Description		External power supply connectable (24 V DC) Configurable with SWD-Assist (planning and ordering tool) Further technical data, see manual MN05006001Z.
Number of modules		max. 5 modules max. 0.3 A per module
Colour		black Aluminum color tube
		
For use with		SL7-L-... SL7-BL-... SL7-FL-... SL7-AP-...
Connection to SmartWire-DT		yes

Technical data

Standards		IEC/EN 60947-5-1
Climatic proofing		Damp heat, cyclic, to IEC 60068-2-30
Mounting position		As required
Mechanical shock resistance	g	> 15 according to IEC 60068-2-27 Shock duration 11 ms Sinusoidal
IEC degree of protection		IP66 IEC/EN 60529
Protection type UL		Type 4, 4X, 13
Cap colour		black Aluminum color tube
Ambient temperature	°C	-30 - +60
Number of signal elements		Max. 5 with standard base Max. 10 with base for mounting on both sides

Design verification as per IEC/EN 61439

Technical data for design verification			
Operating ambient temperature min.		°C	-30
Operating ambient temperature max.		°C	60


Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Connection module for signal tower (EC001152)			
Electric engineering, automation, process control engineering / Low-voltage switch technology / Command and alarm device / Signal column element, connection module (ecI@ss10.0.1-27-37-12-32 [AKF050014])			
Connection type auxiliary circuit			Spring clamp connection
Tube mounting possible			No
Bracket mounting possible			Yes
Floor mounting possible			Yes
Colour			Other
Suitable for AS interface			No

Approvals

Product Standards			IEC/EN 60947-5-1; UL 508; CSA-C22.2 No. 14-10; CSA-C22.2 No. 94-91; CE marking
North America Certification			Request filed for UL and CSA
Degree of Protection			UL Type 4, 4X, 13

Dimensions

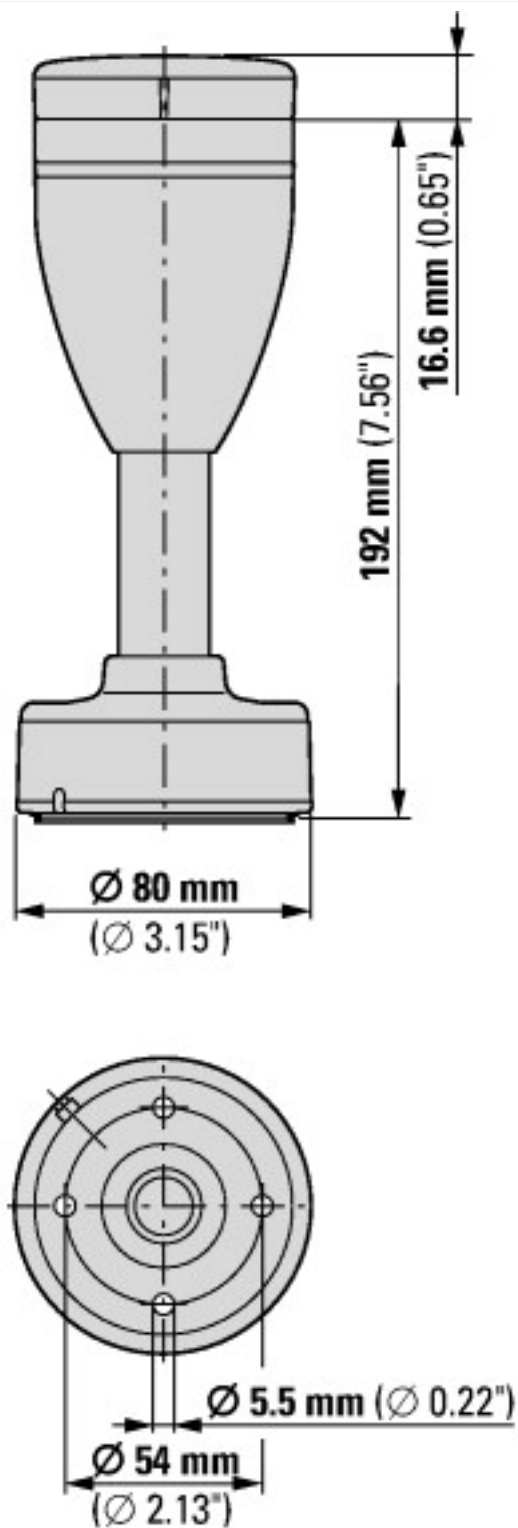

Assets (links)

Declaration of CE Conformity

00002899

Instruction Leaflets

IL047008ZU2018_04

Manuals

MN05006001Z_DE (German)

MN05006001Z_EN (English)

MN05006002Z_DE (German)

MN05006002Z_EN (English)

MN05006002Z_IT (Italian)