


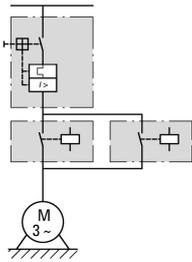

Reversing starter, 3p, 0.18kW/400V/AC3, 150kA


Part no. **MSC-R-0,63-M7(230V50HZ)**  
 Catalog No. **283173**  
 Alternate Catalog No. **XTSRP63B007BFNL**  
 EL-Nummer (Norway) **4365052**

**Delivery program**

|   |       |    |              |  |
|---|-------|----|--------------|--|
| Basic function  |       |    |              | Reversing starters (complete devices)  |
| Basic device  |       |    |              | MSC  |
|   |       |    |              |                                    |
| Notes   |       |    |              | Also suitable for motors with efficiency class IE3. IE3-ready devices are identified by the logo on their packaging. |
| Connection to SmartWire-DT  |       |    |              | no   |
| <b>Motor ratings</b>  |       |    |              |  |
| Motor rating  |       |    |              |  |
| AC-3  |       |    |              |  |
| 380 V 400 V 415 V   | P     | kW | 0.12<br>0.18 |  |
| Rated operational current   |       |    |              |  |
| AC-3  |       |    |              |  |
| 380 V 400 V 415 V   | $I_e$ | A  | 0.41<br>0.6  |  |
| Rated short-circuit current 380 - 415 V   | $I_q$ | kA | 150          |  |
| <b>Setting range</b>  |       |    |              |  |
| Setting range of overload releases  | $I_r$ | A  | 0.4 - 0.63   |  |
|   |       |    |              |                                   |
| Coordination  |       |    |              | Type of coordination "1"<br>Type of coordination "2"   |
| Contact sequence  |       |    |              |                                  |
| Actuating voltage   |       |    |              | 230 V 50 Hz, 240 V 60 Hz<br>AC voltage   |
| <b>Motor-protective circuit-breakers</b> PKZM0-0,63<br>PKZM0-0,63   |       |    |              |  |
| Contactor DILM7-01(...)   |       |    |              |  |
| <b>DOL starter wiring set</b><br>Mechanical connection element and electrical electric contact module PKZM0-XRM12   |       |    |              |  |
| <b>Notes</b>  |       |    |              |  |
| The reversing starter (complete unit) consists of a PKZM0 motor-protective circuit-breaker and two DILM contactors.   |       |    |              |  |
| With the adapter-less top-hat rail mounting of starters up to 12 A, only the motor-protective circuit-breaker on the top-hat rail requires an adapter. The contactors are provided with mechanical support via a mechanical connection element. |       |    |              |  |
| Control wire guide with max. 6 conductors up to 2.5mm external diameter or 4 conductors up to 3.5mm external diameter.  |       |    |              |  |
| From 16 A, the motor-protective circuit-breakers and contactors are mounted on the top-hat rail adapter plate.  |       |    |              |  |
| The connection of the main circuit between PKZ and contactor is established with electrical contact modules.  |       |    |              |  |
| Complete units with mechanical interlock, starters up to 12 A also feature electrical interlock.  |       |    |              |  |
| When using the auxiliary contacts DILA-XHIT... (→ 101042) the plug-in electrical connector can be removed without the removal of the front mounting auxiliary contact.  |       |    |              |  |

## Technical data

### General
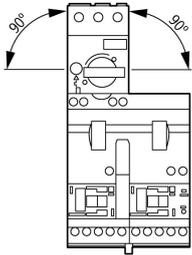
|                   |  |  |  |
|-------------------|--|--|--|
| Standards         |  |  | UL 508 (on request)<br>CSA C 22.2 No. 14 (on request)                              |
| Mounting position |  |  |  |

### Main conducting paths

|                                       |           |      |           |
|---------------------------------------|-----------|------|-----------|
| Rated impulse withstand voltage       | $U_{imp}$ | V AC | 6000      |
| Overtoltage category/pollution degree |           |      | III/3     |
| Rated operational voltage             | $U_e$     | V    | 230 - 415 |
| Rated operational current             |           |      |           |
| Open, 3-pole: 50 – 60 Hz              |           |      |           |
| 380 V 400 V                           | $I_e$     | A    | 0.63      |

### Additional technical data

|  |         |   |   |
|--|---------|---|---|
| Motor protective circuit breaker PKZM0, PKE                        |         |   | PKZM0 motor-protective circuit-breakers, see motor-protective circuit-breakers/<br>PKZM0 product group<br>DILM contactors, see contactor product group<br>DILET timing relay, ETR, see contactors, electronic timing relays product group |
| DILM contactors  |         |   |   |
| Power consumption of the coil in a cold state and $1.0 \times U_S$ |         |   |   |
| Dual-voltage coil 50 Hz  | Sealing | W | 1.2   |

### Rating data for approved types

|                    |  |   |      |
|--------------------|--|---|------|
| Auxiliary contacts |  |   |      |
| Pilot Duty         |  |   |      |
| AC operated        |  |   | A600 |
| DC operated        |  |   | P300 |
| General Use        |  |   |      |
| AC                 |  | V | 600  |
| AC                 |  | A | 15   |
| DC                 |  | V | 250  |
| DC                 |  | A | 1    |

## Design verification as per IEC/EN 61439

|  |            |    |  |
|--|------------|----|--|
| Technical data for design verification                                     |            |    |  |
| Rated operational current for specified heat dissipation                   | $I_n$      | A  | 0.63                                       |
| Heat dissipation per pole, current-dependent                               | $P_{vid}$  | W  | 1.9  |
| Equipment heat dissipation, current-dependent                              | $P_{vid}$  | W  | 5.7  |
| Static heat dissipation, non-current-dependent                             | $P_{vs}$   | W  | 1.4  |
| Heat dissipation capacity  | $P_{diss}$ | W  | 0  |
| Operating ambient temperature min.   |            | °C | -25  |
| Operating ambient temperature max.   |            | °C | 55   |
| IEC/EN 61439 design verification   |            |    |  |
| 10.2 Strength of materials and parts                                       |            |    |  |
| 10.2.2 Corrosion resistance  |            |    | Meets the product standard's requirements. |
| 10.2.3.1 Verification of thermal stability of enclosures                   |            |    | Meets the product standard's requirements. |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat |            |    | Meets the product standard's requirements. |

|  |  |  |
|--|--|--|
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |  | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |  | Meets the product standard's requirements.   |
| 10.2.5 Lifting   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |  | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |  | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |  | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |  | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |  |  |
| 10.9.2 Power-frequency electric strength   |  | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |  | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |  | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |  | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  |  | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 7.0


|  |    |  |                   |
|--|----|--|-------------------|
| Low-voltage industrial components (EG000017) / Motor starter/Motor starter combination (EC001037)  |    |  |                   |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Load breakout, motor breakout / Motor starter combination (ecl@ss10.0.1-27-37-09-05 [AJZ718013]) |    |  |                   |
| Kind of motor starter  |    |  | Reversing starter |
| With short-circuit release   |    |  | Yes               |
| Rated control supply voltage $U_s$ at AC 50HZ  | V  |  | 230 - 230         |
| Rated control supply voltage $U_s$ at AC 60HZ  | V  |  | 0 - 0             |
| Rated control supply voltage $U_s$ at DC   | V  |  | 0 - 0             |
| Voltage type for actuating   |    |  | AC                |
| Rated operation power at AC-3, 230 V, 3-phase  | kW |  | 0.09              |
| Rated operation power at AC-3, 400 V   | kW |  | 0.18              |
| Rated power, 460 V, 60 Hz, 3-phase   | kW |  | 0                 |
| Rated power, 575 V, 60 Hz, 3-phase   | kW |  | 0                 |
| Rated operation current $I_e$  | A  |  | 0.6               |
| Rated operation current at AC-3, 400 V   | A  |  | 0.63              |
| Overload release current setting   | A  |  | 0.4 - 0.63        |
| Rated conditional short-circuit current, type 1, 480 Y/277 V   | A  |  | 0                 |
| Rated conditional short-circuit current, type 1, 600 Y/347 V   | A  |  | 0                 |
| Rated conditional short-circuit current, type 2, 230 V   | A  |  | 50000             |
| Rated conditional short-circuit current, type 2, 400 V   | A  |  | 50000             |
| Number of auxiliary contacts as normally open contact  |    |  | 0                 |
| Number of auxiliary contacts as normally closed contact  |    |  | 0                 |
| Ambient temperature, upper operating limit   | °C |  | 60                |
| Temperature compensated overload protection  |    |  | Yes               |
| Release class  |    |  | CLASS 10          |
| Type of electrical connection of main circuit  |    |  | Screw connection  |
| Type of electrical connection for auxiliary- and control current circuit   |    |  | Screw connection  |
| Rail mounting possible   |    |  | Yes               |
| With transformer   |    |  | No                |
| Number of command positions  |    |  | 0                 |
| Suitable for emergency stop  |    |  | No                |
| Coordination class according to IEC 60947-4-3  |    |  | Class 2           |

|   |  |    |       |
|---|--|----|-------|
| Number of indicator lights                          |  |    | 0     |
| External reset possible                             |  |    | No    |
| With fuse   |  |    | No    |
| Degree of protection (IP)                           |  |    | IP20  |
| Degree of protection (NEMA)                         |  |    | Other |
| Supporting protocol for TCP/IP                      |  |    | No    |
| Supporting protocol for PROFIBUS                    |  |    | No    |
| Supporting protocol for CAN                         |  |    | No    |
| Supporting protocol for INTERBUS                    |  |    | No    |
| Supporting protocol for ASI                         |  |    | No    |
| Supporting protocol for MODBUS                      |  |    | No    |
| Supporting protocol for Data-Highway                |  |    | No    |
| Supporting protocol for DeviceNet                   |  |    | No    |
| Supporting protocol for SUCONET                     |  |    | No    |
| Supporting protocol for LON                         |  |    | No    |
| Supporting protocol for PROFINET IO                 |  |    | No    |
| Supporting protocol for PROFINET CBA                |  |    | No    |
| Supporting protocol for SERCOS                      |  |    | No    |
| Supporting protocol for Foundation Fieldbus         |  |    | No    |
| Supporting protocol for EtherNet/IP                 |  |    | No    |
| Supporting protocol for AS-Interface Safety at Work |  |    | No    |
| Supporting protocol for DeviceNet Safety            |  |    | No    |
| Supporting protocol for INTERBUS-Safety             |  |    | No    |
| Supporting protocol for PROFIsafe                   |  |    | No    |
| Supporting protocol for SafetyBUS p                 |  |    | No    |
| Supporting protocol for other bus systems           |  |    | No    |
| Width   |  | mm | 90    |
| Height  |  | mm | 180   |
| Depth   |  | mm | 95    |

## Approvals

|                                      |  |  |   |
|--------------------------------------|--|--|---|
| Product Standards                    |  |  | UL60947-4-1A; CSA-C22.2 No. 14-10; IEC60947-4-1; CE marking |
| UL File No.                          |  |  | E123500   |
| UL Category Control No.              |  |  | NKJH  |
| CSA File No.                         |  |  | 12528   |
| CSA Class No.                        |  |  | 3211-24   |
| North America Certification          |  |  | UL listed, CSA certified                                    |
| Specially designed for North America |  |  | No  |

## Dimensions

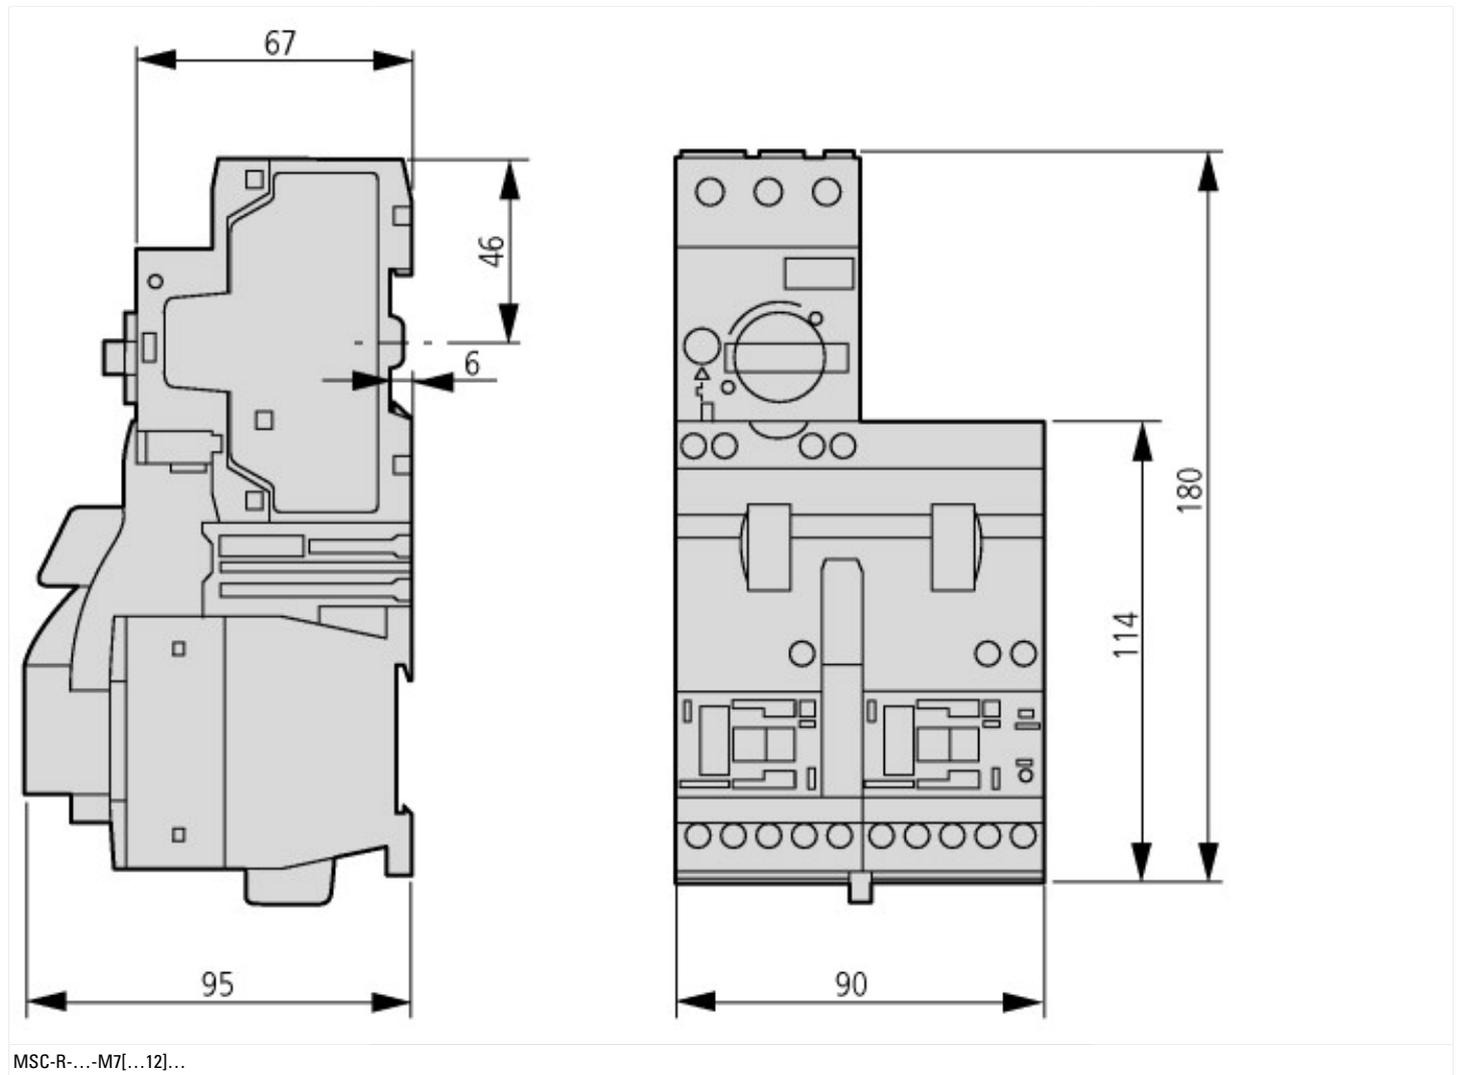

## Assets (links)

### Declaration of CE Conformity

00002885

### Instruction Leaflets

IL03402006Z2018\_04