



**Trip block, 0.3 - 1.2 A, Motor protection, Connection to SmartWire-DT: no, For use with: PKE12 basic device**

**EATON**  
Powering Business Worldwide™

**Part no.** PKE-XTU-1,2  
**Catalog No.** 121723  
**Alternate Catalog No.** XTPEXT1P2B  
**EL-Nummer (Norway)** 0004315135

## Delivery program

Product range	Accessories				
Accessories	Trip blocks				
Basic function	Motor protection Motor protection for heavy starting duty				
					
Notes	Also suitable for motors with efficiency class IE3. IE3-ready devices are identified by the logo on their packaging.				
<b>Setting range</b>					
Overload releases					
					
Setting range of overload releases	$I_r$	A	0.3 - 1.2		
					
Overload release, min.	$I_r$	A	0.3		
Overload release, max.	$I_r$	A	1.2		
Function	With overload release				
Rated uninterrupted current = rated operational current	$I_u = I_e$	A	1.2		
<b>Motor rating</b>					
AC-3					
220 V 230 V	P	kW	0.18		
380 V 400 V	P	kW	0.37		
440 V	P	kW	0.37		
500 V	P	kW	0.37		
660 V 690 V	P	kW	0.75		
For use with	PKE12 basic device				
Connection to SmartWire-DT	no				
Motor output/rated motor current					
Motor rating	Rated motor current				
AC-3	220 V	380 V	440 V	500 V	660 V
	230 V	400 V			690 V
P	240 V	415 V	I	I	I
kW	I	I	A	A	A
0.06	0.37	-	-	-	-
0.09	0.54	0.31	-	-	-
0.12	0.72	0.41	0.37	0.33	-
0.18	1.04	0.6	0.54	0.48	0.35
0.25	-	0.8	0.76	0.7	0.5
0.37	-	1.1	1.02	0.9	0.7
0.55	-	-	-	-	0.9
0.75	-	-	-	-	1.1

## Technical data

### General

Standards	IEC/EN 60947, VDE 0660, UL, CSA	
Climatic proofing	Damp heat, constant, to IEC 60068-2-78	

			Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature		°C	
Storage		°C	-40 - 80
Open		°C	-25 - +55
Enclosed		°C	-25 - 40
Mounting position			
Direction of incoming supply			as required
Degree of protection			
Device			IP20
Terminations			IP00
Protection against direct contact when actuated from front (EN 50274)			Finger and back-of-hand proof
Mechanical shock resistance half-sinusoidal shock 10 ms to IEC 60068-2-27	g		25
Altitude	m		Max. 2000

### Main conducting paths

Rated impulse withstand voltage	$U_{imp}$	V AC	6000
Oversupply category/pollution degree			III/3
Rated operational voltage	$U_e$	V AC	690
Rated uninterrupted current = rated operational current	$I_u = I_e$	A	1.2
Rated frequency	f	Hz	40 - 60
Max. operating frequency		Ops/h	60
Motor switching capacity			
AC-3 (up to 690V)		A	1.2
AC-4 cycle operation			
Minimum current flow times		ms	500 (Class 5) 700 (Class 10) 900 (Class 15) 1000 (Class 20)
Minimum cut-out periods		ms	500
Note		ms	In AC-4 cycle operation, going below the minimum current flow time can cause overheating of the load (motor). For all combinations with an SWD activation, you need not adhere to the minimum current flow times and minimum cut-out periods.

### Trip blocks

Temperature compensation			
to IEC/EN 60947, VDE 0660		°C	-5 ... 40
Operating range		°C	-25 ... 55
Setting range of overload releases		$\times I_u$	0.25 - 1
short-circuit release			Trip block, fixed: $15.5 \times I_r$ delayed approx. 60 ms
Short-circuit release tolerance			± 20%
Phase-failure sensitivity			IEC/EN 60947-4-1, VDE 0660 Part 102

## Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	$I_n$	A	1.2
Heat dissipation per pole, current-dependent	$P_{vid}$	W	0.1
Equipment heat dissipation, current-dependent	$P_{vid}$	W	0.3
Static heat dissipation, non-current-dependent	$P_{vs}$	W	0
Heat dissipation capacity	$P_{diss}$	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	55
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.

10.2.3.2 Verification of resistance of insulating materials to normal heat	Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects	Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation	Meets the product standard's requirements.
10.2.5 Lifting	Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact	Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions	Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES	Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances	Meets the product standard's requirements.
10.5 Protection against electric shock	Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components	Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections	Is the panel builder's responsibility.
10.8 Connections for external conductors	Is the panel builder's responsibility.
10.9 Insulation properties	
10.9.2 Power-frequency electric strength	Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.10 Temperature rise	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

## Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Tripping bloc for power circuit-breaker (EC000617)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Releasing block for circuit breakers (ecl@ss10.0.1-27-37-04-10 [AKF008013])

Overload release current setting	A	0.3 - 1.2
Initial value of the undelayed short-circuit release - setting range	A	4.65
End value adjustment range undelayed short-circuit release	A	18.6
Rated permanent current $I_p$	A	1.2
Voltage type for actuating		Self powered
Rated control supply voltage $U_s$ at AC 50HZ	V	0 - 0
Rated control supply voltage $U_s$ at AC 60HZ	V	0 - 0
Rated control supply voltage $U_s$ at DC	V	0 - 0
Number of poles		3
Short-circuit release function		Delayed
With ground fault protection function		No
Type of motor protection		Electronic release

## Approvals

Product Standards	UL 508; CSA-C22.2 No. 14-10; IEC60947-4-1; CE marking
UL File No.	E36332
UL Category Control No.	NLRV
CSA File No.	165628
CSA Class No.	3211-05
North America Certification	UL listed, CSA certified
Specially designed for North America	No

## Characteristics

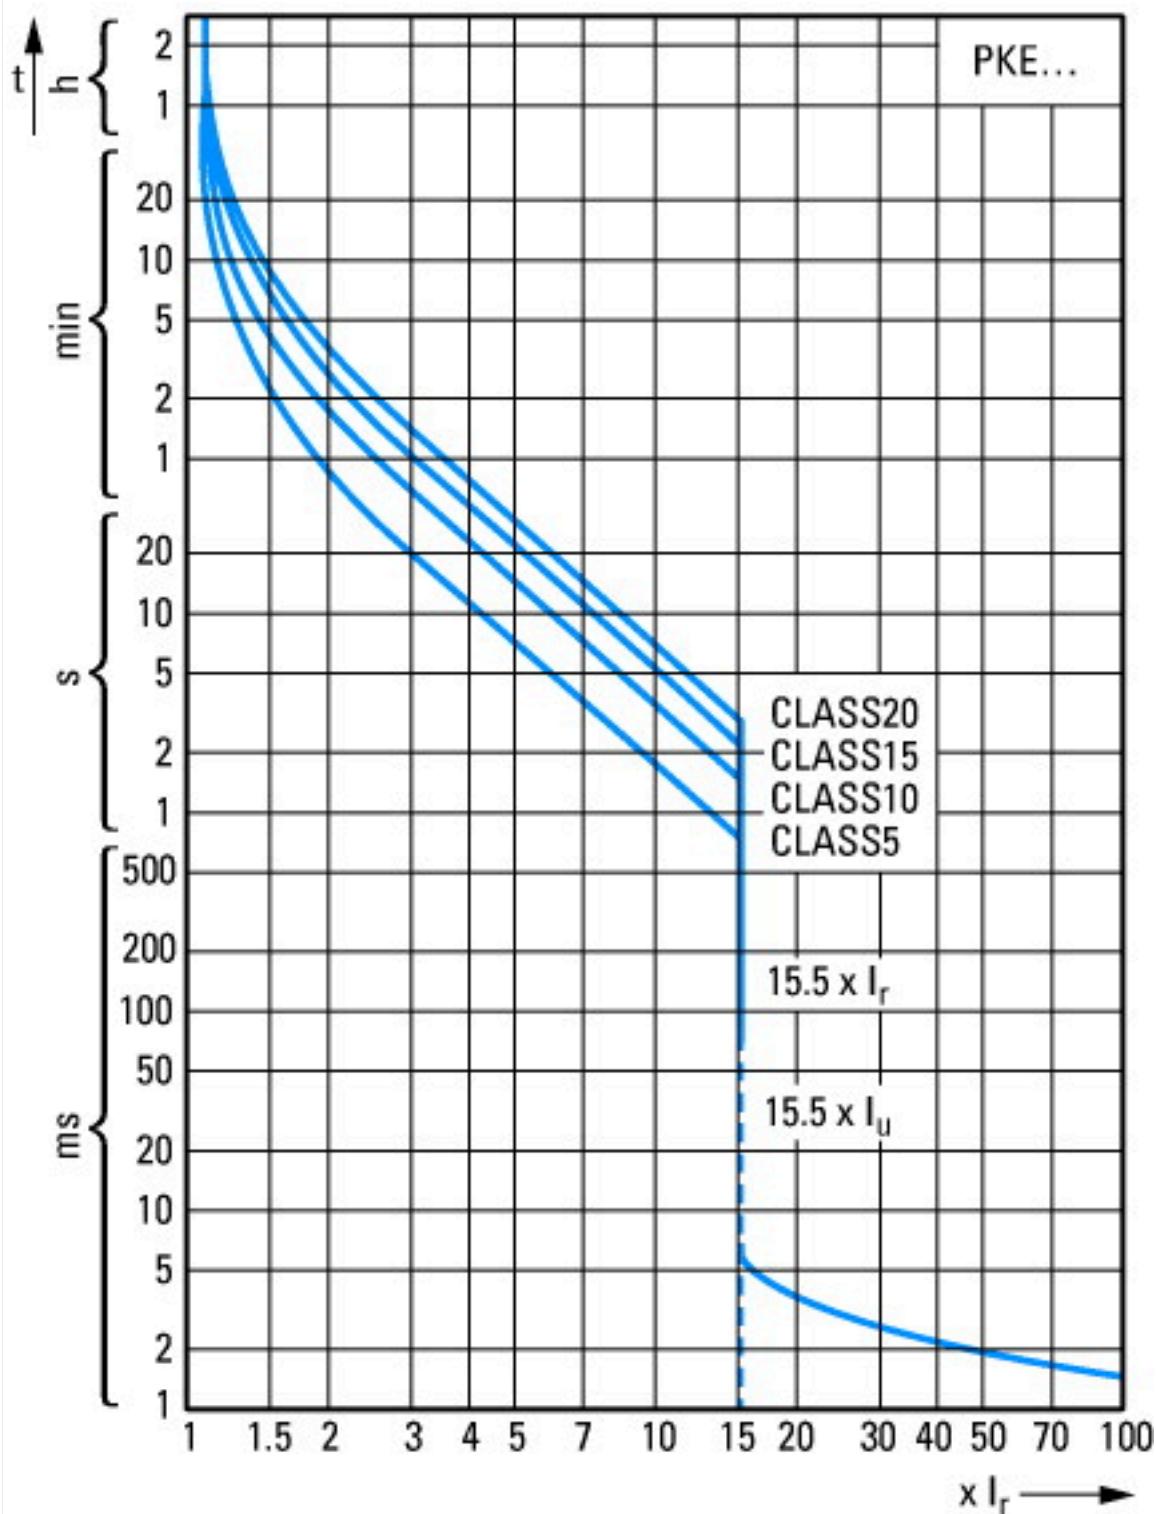

Tripping characteristics

## Assets (links)

### Declaration of CE Conformity

00002852

### Instruction Leaflets

IL034011ZU2018\_03

### Manuals

MN03402004Z\_DE\_EN (German)

MN03402004Z\_DE\_EN (English)