

**Adapter for MSC-D, 25 A**

Part no. MSFAD-25
Catalog No. 191097
Alternate Catalog No. MSFD-25
EL-Nummer (Norway) 1666804


Delivery program

Product range			Accessories
Accessories			Busbar adapters
			Approved to UL 508
Rated operational voltage	U _e	V	690
Rated operational current	I _e	A	25
Terminal capacity			AWG 12 (4 mm ²)
Adapter width		mm	45
Adapter length		mm	160
DIN rail		Quantity	1
For use with			MSC-D, 25 A
Pole			3

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Busbar adapter (EC001531)			
Electric engineering, automation, process control engineering / Low-voltage switch technology / Busbar trunking system (LV circuitry) / Busbar adapter (low-voltage switching technology) (ecl@ss10.0.1-27-37-03-04 [ACN951011])			
Mounting rail armament			1 mounting rail
Type of electric connection			3 conductors AWG 12
Rated current I _n		A	25
Min. busbar thickness		mm	2
Max. busbar thickness		mm	2
Width of the adapter		mm	45
Rail width		mm	24
Busbar distance		mm	60

Dimensions

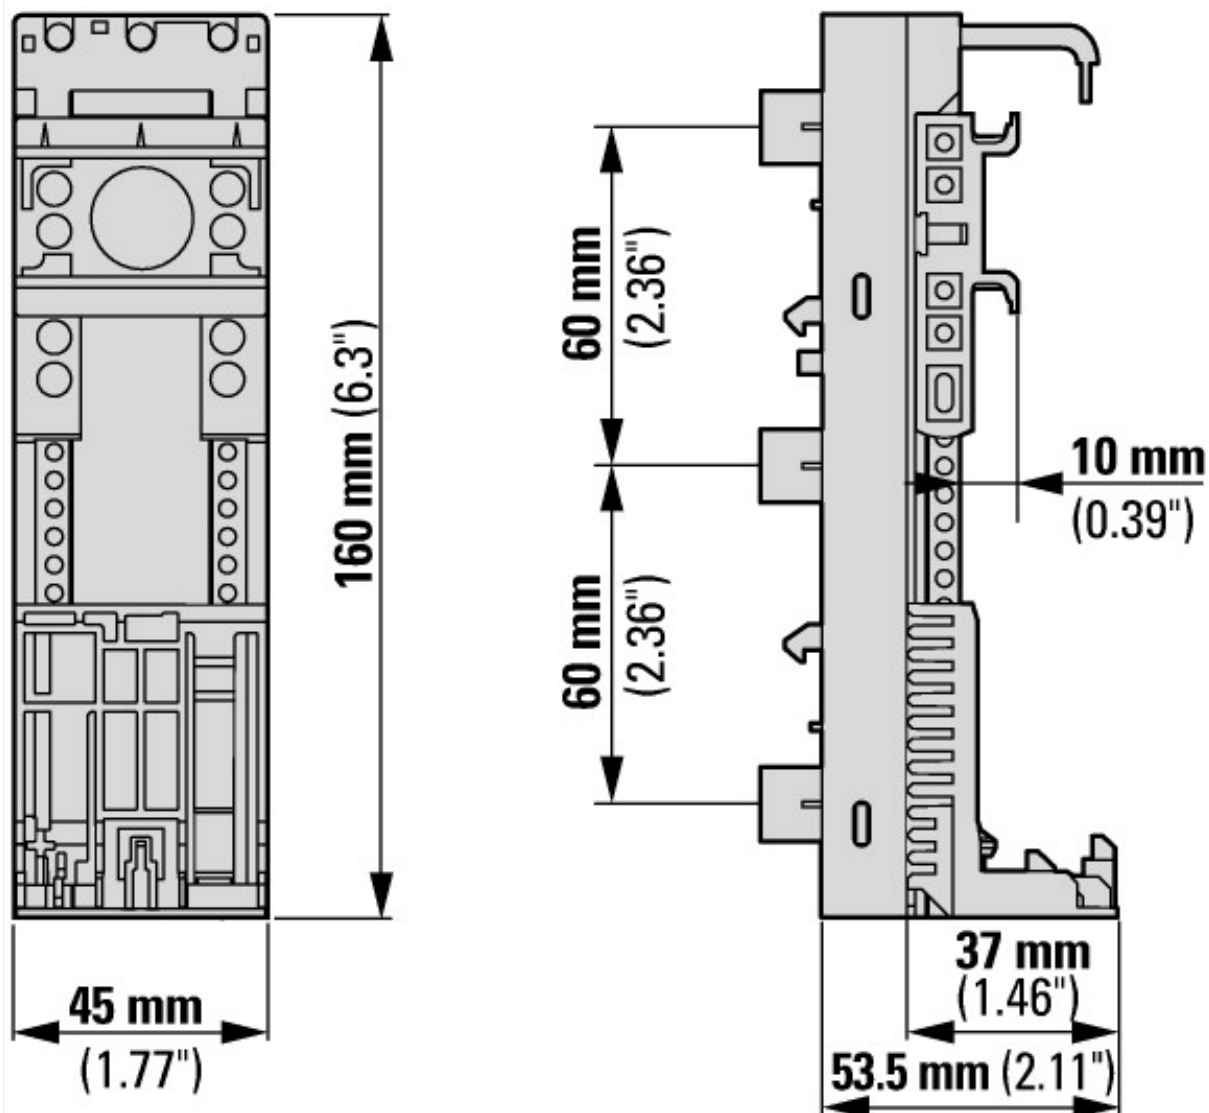

Assets (links)

[Declaration of CE Conformity](#)

00002971

[Instruction Leaflets](#)

IL015082ZU2018_05