

Select your language

-
- German
 - English
 - Spanish
 - French
 - Dutch
 - Italian
 - Polish
 - Czech
 - Russian
 - Norwegian Bokmål

Worldwide English




M22-XBK - Label, emergency switching off, yellow , blank



269580 M22-XBK

[Overview](#) [Specifications](#) [Resources](#)

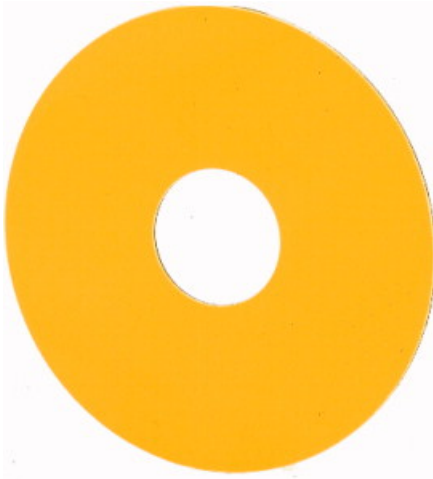

269580 M22-XBK

Label, emergency switching off, yellow , blank

Alternate Catalog No.

EL-Nummer (Norway)

Emergency-Stop label, Product range: Accessories, yellow , Connection to SmartWire-DT: no

M22-XBKQ

4315306

- Delivery program
- Technical data
- Design verification as per IEC/EN 61439
- Technical data ETIM 7.0
- Approvals
- Dimensions

Delivery program

Product range
Accessories
Basic function accessories
Emergency-stop labels
Form
Diameter = 60 mm
Name
Blank
Colour
yellow



RAL Value
RAL 1004
Degree of Protection
IP66
Connection to SmartWire-DT
no

Technical data

General

Degree of Protection
 IP66
 Ambient temperature Open
 -25 - +70 °C
 shipping classification
 DNV
 GL
 LR



Germanischer Lloyd



Design verification as per IEC/EN 61439

Technical data for design verification

Rated operational current for specified heat dissipation [I_n]

0 A

Heat dissipation per pole, current-dependent [P_{vid}]

0 W

Equipment heat dissipation, current-dependent [P_{vid}]

0 W

Static heat dissipation, non-current-dependent [P_{vs}]

0 W

Heat dissipation capacity [P_{diss}]

0 W

Operating ambient temperature min.

-25 °C

Operating ambient temperature max.

+70 °C

IEC/EN 61439 design verification

10.2 Strength of materials and parts 10.2.2 Corrosion resistance

Meets the product standard's requirements.

10.2 Strength of materials and parts 10.2.3.1 Verification of thermal stability of enclosures

Meets the product standard's requirements.

10.2 Strength of materials and parts 10.2.3.2 Verification of resistance of insulating materials to normal heat

Meets the product standard's requirements.

10.2 Strength of materials and parts 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects

Meets the product standard's requirements.

10.2 Strength of materials and parts 10.2.4 Resistance to ultra-violet (UV) radiation

Please enquire

10.2 Strength of materials and parts 10.2.5 Lifting

Does not apply, since the entire switchgear needs to be evaluated.

10.2 Strength of materials and parts 10.2.6 Mechanical impact

Does not apply, since the entire switchgear needs to be evaluated.

10.2 Strength of materials and parts 10.2.7 Inscriptions

Meets the product standard's requirements.

10.3 Degree of protection of ASSEMBLIES

Does not apply, since the entire switchgear needs to be evaluated.

10.4 Clearances and creepage distances

Meets the product standard's requirements.

10.5 Protection against electric shock

Does not apply, since the entire switchgear needs to be evaluated.

10.6 Incorporation of switching devices and components

Does not apply, since the entire switchgear needs to be evaluated.

10.7 Internal electrical circuits and connections

Is the panel builder's responsibility.

10.8 Connections for external conductors

Is the panel builder's responsibility.

10.9 Insulation properties 10.9.2 Power-frequency electric strength

Is the panel builder's responsibility.

10.9 Insulation properties 10.9.3 Impulse withstand voltage

Is the panel builder's responsibility.

10.9 Insulation properties 10.9.4 Testing of enclosures made of insulating material

Is the panel builder's responsibility.

10.10 Temperature rise

Not applicable.

10.11 Short-circuit rating

Is the panel builder's responsibility. The specifications for the switchgear must be observed.

10.12 Electromagnetic compatibility

Is the panel builder's responsibility. The specifications for the switchgear must be observed.

10.13 Mechanical function

The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Text plate for control circuit devices (EC000624)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Command and alarm device / Identification plate for command devices (ec1@ss10.0.1-27-37-12-25 [AKF043014])

Imprint

Without imprint

Imprint ISO symbols

Without imprint

Colour

Yellow

Shape

Round

Width

60 mm

Height

60 mm

Outer diameter

60 mm

Approvals

North America Certification

UL/CSA certification not required

Dimensions



CAD data

- [Product-specific CAD data](#)
(Web)
- [3D Preview](#)
(Web)

DWG files

- [DA-CD-not_aus_schild_xbk](#)
File
(Web)

Step files

- [DA-CS-not_aus_schild_xbk](#)
File
(Web)

Product photo



116A276

Photo

Emergency-Stop label, blank

Dimensions single product

- □

116X090

Line drawing

Emergency-Stop label

3D drawing

- 1160DRW-254
Line drawing

Symbol

- 
Germanischer Lloyd
0000SPC-180
Graphic
Germanischer Lloyd approval for Germany (color logo)
- 
DNV
0000SPC-183
Logo
Approval Norway Det Norske Veritas DNV
- 
116C064
Graphic
Button plate, yellow

Instruction Leaflet

- RMQ-Titan System (IL04716002Z)
Asset
former AWA1160-1745, IL04716001E
(PDF, 09/2020, multilingual)

StandardsSymbol

- 
0000SPC-179
Graphic
Lloyd's Register approval for Great Britain

Declaration of Conformity

EU

- E-stop operating devices RMQ Titan & acc. M22/M30(S)-PV(LT)30... (DA-DC-00003323)
Asset
(PDF)
- Emergency-stop operating devices RMQ Titan & accessories M22-..., M30-... (DA-DC-00003622)
Asset
(PDF)
- RMQ Titan (Operating and signalling devices) M22.../M30.../C22.../C30... (DA-DC-00003657)
Asset
(PDF)

- [RMQ Titan \(Operating and signalling devices\) M22.../M30.../C22.../C30... \(DA-DC-00003960\)](#)
Asset
(PDF)

Download-Center

- [Download-Center \(this item\)](#)
Eaton EMEA Download-Center - download data for this item
- [Download-Center](#)
Eaton EMEA Download-Center



Generate data sheet in PDF format



Generate data sheet in Excel format



Write a comment

[Imprint](#) [Privacy Policy](#) [Legal Disclaimer](#) [Terms and Conditions](#)

© 2021 by Eaton Industries GmbH

