



DOL starter, 3p, 7.5kW/400V/AC3, 50kA, +busbar adapter

**Part no.** **MSC-D-16-M17(24VDC)/BBA**  
**Catalog No.** **102978**  
**Alternate Catalog No.** **XTSC016B018CTDNL-A**  
**EL-Nummer (Norway)** **4315439**

**EATON**

Powering Business Worldwide™

## Delivery program

Basic function		DOL starters (complete devices)
Basic device		MSC
Notes		Also suitable for motors with efficiency class IE3. IE3-ready devices are identified by the logo on their packaging.
Connection to SmartWire-DT		no
<b>Motor ratings</b>		
Motor rating		
AC-3		
380 V 400 V 415 V	P	kW
Rated operational current		7.5
AC-3		
380 V 400 V 415 V	I <sub>e</sub>	A
Rated short-circuit current 380 - 415 V	I <sub>q</sub>	kA
15.2		
50		
<b>Setting range</b>		
Setting range of overload releases	I <sub>r</sub>	A
		10 - 16
Coordination		Type of coordination "1" Type of coordination "2"
Contact sequence		
Actuating voltage		24 V DC DC voltage
<b>Motor-protective circuit-breakers PKZM0-16</b>		
Contactor DILM17-10(...)		
<b>DOL starter wiring set</b>		
Mechanical connection element and electrical electric contact module PKZM0-XM32DE		
<b>Notes</b>		

**Notes**

The DOL starters (complete units) consist of a PKZM0 motor protective circuit breaker and a DILM contactor. These combinations are mounted on the busbar adapters.

The connection of the main circuit between the motor protective circuit breaker and the contactor is established with an electrical contact module.

Cannot be combined with NHI-E-...-PKZ0-C standard auxiliary contact with spring-cage terminal.

**Further information**

Technical data PKZM0  
Accessories PKZ  
Technical data DILM  
Accessories DILM

**Page**  
→ PKZM0  
→ 072896  
→ DILM  
→ 281199

**Technical data****General**

Standards		UL 508 (on request) CSA C 22.2 No. 14 (on request)
-----------	--	---

**Main conducting paths**

Rated impulse withstand voltage	$U_{imp}$	V AC	6000
Overtoltage category/pollution degree			III/3
Rated operational voltage	$U_e$	V	230 - 415
Rated operational current			
Open, 3-pole: 50 – 60 Hz			
380 V 400 V	$I_e$	A	16

**Additional technical data**

Motor protective circuit breaker PKZM0, PKE		PKZM0 motor-protective circuit-breakers, see motor-protective circuit-breakers/ PKZM0 product group DILM contactors, see contactor product group DILET timing relay, ETR, see contactors, electronic timing relays product group
---	--	---

**Power consumption**

DC operated	Sealing	W	0.5
-------------	---------	---	-----

**Rating data for approved types**

Auxiliary contacts			
Pilot Duty			
AC operated			A600
DC operated			P300
General Use			
AC		V	600
AC		A	15
DC		V	250
DC		A	1

**Design verification as per IEC/EN 61439**

Technical data for design verification			
Rated operational current for specified heat dissipation	$I_n$	A	16
Heat dissipation per pole, current-dependent	$P_{vid}$	W	3.3
Equipment heat dissipation, current-dependent	$P_{vid}$	W	9.9
Static heat dissipation, non-current-dependent	$P_{vs}$	W	0.9
Heat dissipation capacity	$P_{diss}$	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	55
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.

10.2.7 Inscriptions	Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES	Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances	Meets the product standard's requirements.
10.5 Protection against electric shock	Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components	Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections	Is the panel builder's responsibility.
10.8 Connections for external conductors	Is the panel builder's responsibility.
10.9 Insulation properties	
10.9.2 Power-frequency electric strength	Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.10 Temperature rise	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

## Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Motor starter/Motor starter combination (EC001037)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Load breakout, motor breakout / Motor starter combination (ecl@ss10.0.1-27-37-09-05 [AJZ718013])


Kind of motor starter	Direct starter
With short-circuit release	Yes
Rated control supply voltage Us at AC 50Hz	V 0 - 0
Rated control supply voltage Us at AC 60Hz	V 0 - 0
Rated control supply voltage Us at DC	V 24 - 24
Voltage type for actuating	DC
Voltage type for actuating	DC
Rated operation power at AC-3, 230 V, 3-phase	kW 4
Rated operation power at AC-3, 400 V	kW 7.5
Rated power, 460 V, 60 Hz, 3-phase	kW 0
Rated power, 575 V, 60 Hz, 3-phase	kW 0
Rated operation current Ie	A 15.2
Rated operation current at AC-3, 400 V	A 16
Overload release current setting	A 10 - 16
Rated conditional short-circuit current, type 1, 480 Y/277 V	A 0
Rated conditional short-circuit current, type 1, 600 Y/347 V	A 0
Rated conditional short-circuit current, type 2, 230 V	A 50000
Rated conditional short-circuit current, type 2, 400 V	A 50000
Number of auxiliary contacts as normally open contact	1
Number of auxiliary contacts as normally closed contact	0
Ambient temperature, upper operating limit	°C 60
Temperature compensated overload protection	Yes
Release class	CLASS 10
Type of electrical connection of main circuit	Screw connection
Type of electrical connection for auxiliary- and control current circuit	Screw connection
Rail mounting possible	Yes
With transformer	No
Number of command positions	0
Suitable for emergency stop	No
Coordination class according to IEC 60947-4-3	Class 2
Number of indicator lights	0
External reset possible	No
With fuse	No

Degree of protection (IP)		IP00
Degree of protection (NEMA)		Other
Supporting protocol for TCP/IP		No
Supporting protocol for PROFIBUS		No
Supporting protocol for CAN		No
Supporting protocol for INTERBUS		No
Supporting protocol for ASI		No
Supporting protocol for MODBUS		No
Supporting protocol for Data-Highway		No
Supporting protocol for DeviceNet		No
Supporting protocol for SUCONET		No
Supporting protocol for LON		No
Supporting protocol for PROFINET IO		No
Supporting protocol for PROFINET CBA		No
Supporting protocol for SERCOS		No
Supporting protocol for Foundation Fieldbus		No
Supporting protocol for EtherNet/IP		No
Supporting protocol for AS-Interface Safety at Work		No
Supporting protocol for DeviceNet Safety		No
Supporting protocol for INTERBUS-Safety		No
Supporting protocol for PROFIsafe		No
Supporting protocol for SafetyBUS p		No
Supporting protocol for other bus systems		No
Width	mm	45
Height	mm	200
Depth	mm	156

## Approvals

Product Standards	UL60947-4-1A; CSA-C22.2 No. 14-10; IEC60947-4-1; CE marking
UL File No.	E123500
UL Category Control No.	NKJH
CSA File No.	12528
CSA Class No.	3211-04
North America Certification	UL listed, CSA certified
Specially designed for North America	No

## Dimensions

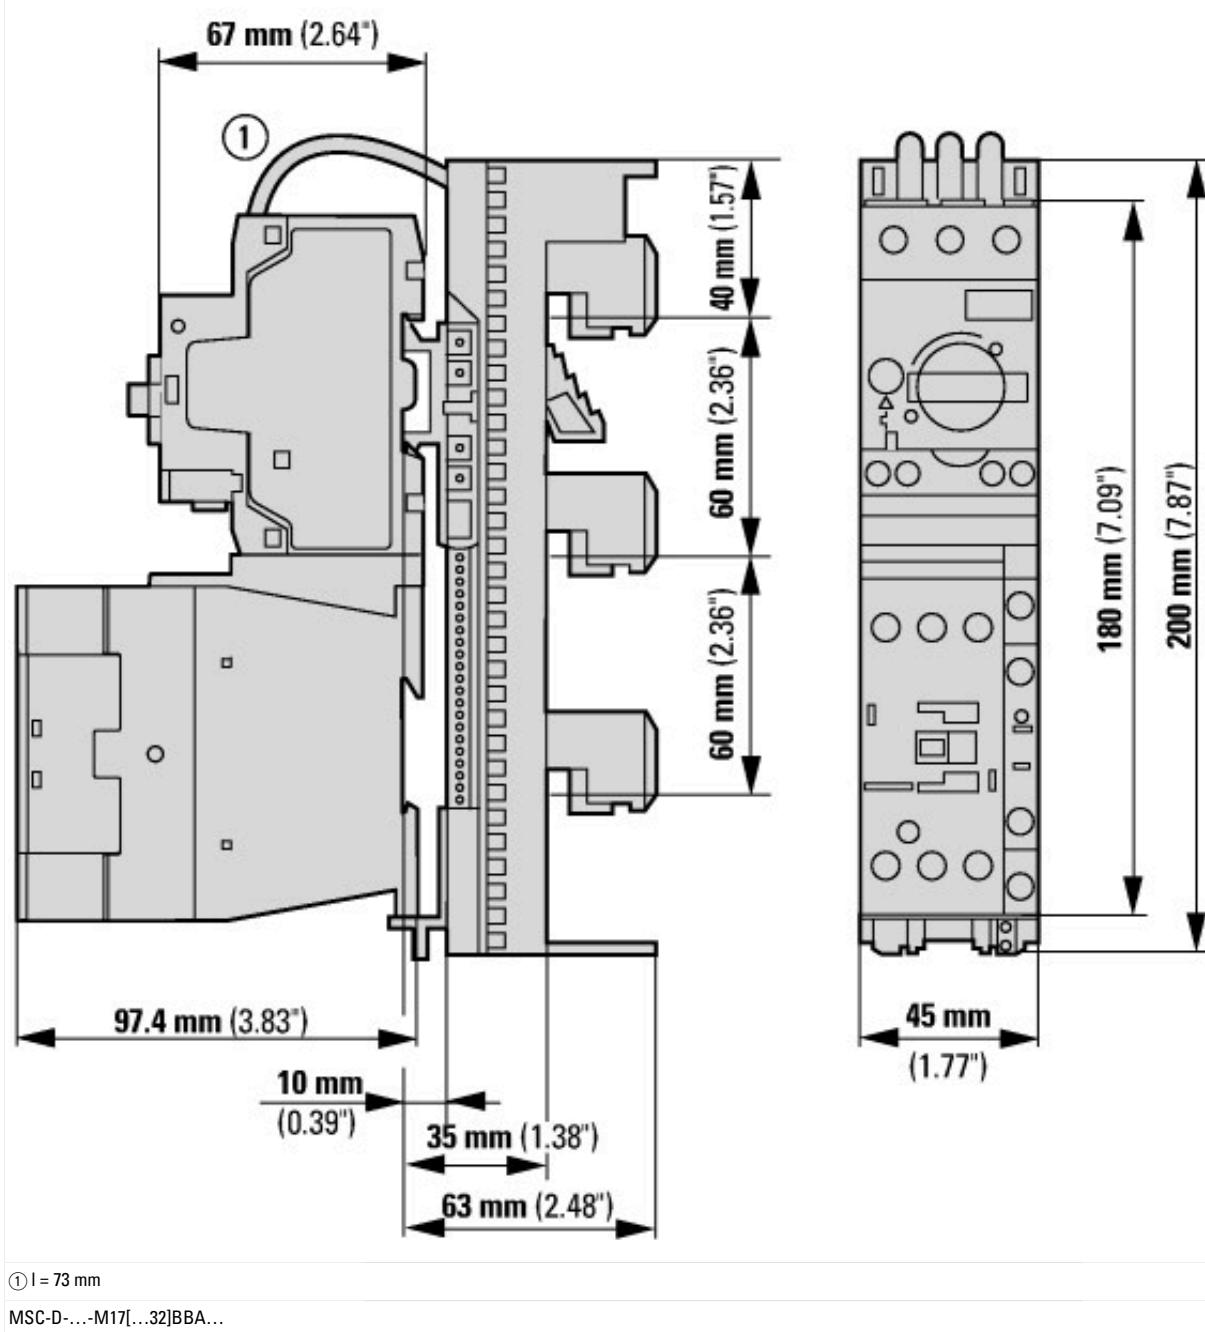

## Assets (links)

### Declaration of CE Conformity

00003118

### Instruction Leaflets

IL03402010Z2018\_05