



Carrier, +label, FAULT

Part no.	M22S-ST-GB8
Catalog No.	216498
Alternate Catalog No.	M22S-ST-GB8Q
EL-Nummer (Norway)	4315299

Similar to illustration

Delivery program

Product range		Accessories
Basic function accessories		Legend holder
Single unit/Complete unit		Single unit
		Complete FAULT
Width	mm	30
Height	mm	50
Design		Round
Colour		
		Black
RAL Value		RAL 9005
Inscription		FAULT
Degree of Protection		IP66
Connection to SmartWire-DT		no

Technical data

General		
Degree of Protection		IP66
Ambient temperature		
Open	°C	-25 - +70

Design verification as per IEC/EN 61439

Technical data for design verification		
Rated operational current for specified heat dissipation	I _n	A 0
Heat dissipation per pole, current-dependent	P _{vid}	W 0
Equipment heat dissipation, current-dependent	P _{vid}	W 0
Static heat dissipation, non-current-dependent	P _{vs}	W 0
Heat dissipation capacity	P _{diss}	W 0
Operating ambient temperature min.		°C -25
Operating ambient temperature max.		°C 70
IEC/EN 61439 design verification		
10.2 Strength of materials and parts		
10.2.2 Corrosion resistance		Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures		Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat		Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects		Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation		Please enquire
10.2.5 Lifting		Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact		Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions		Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES		Does not apply, since the entire switchgear needs to be evaluated.

10.4 Clearances and creepage distances		Meets the product standard's requirements.
10.5 Protection against electric shock		Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components		Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections		Is the panel builder's responsibility.
10.8 Connections for external conductors		Is the panel builder's responsibility.
10.9 Insulation properties		
10.9.2 Power-frequency electric strength		Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage		Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material		Is the panel builder's responsibility.
10.10 Temperature rise		Not applicable.
10.11 Short-circuit rating		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function		The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Text plate holder for control circuit devices (EC001032)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Command and alarm device / Sign carrier for command devices (ecl@ss10.0.1-27-37-12-29 [AKF047014])


Width	mm	30
Height	mm	50
Hole diameter	mm	22
Width opening	mm	0
Height opening	mm	0
Colour		Black
Shape		Rectangular


Approvals

North America Certification

UL/CSA certification not required

Dimensions

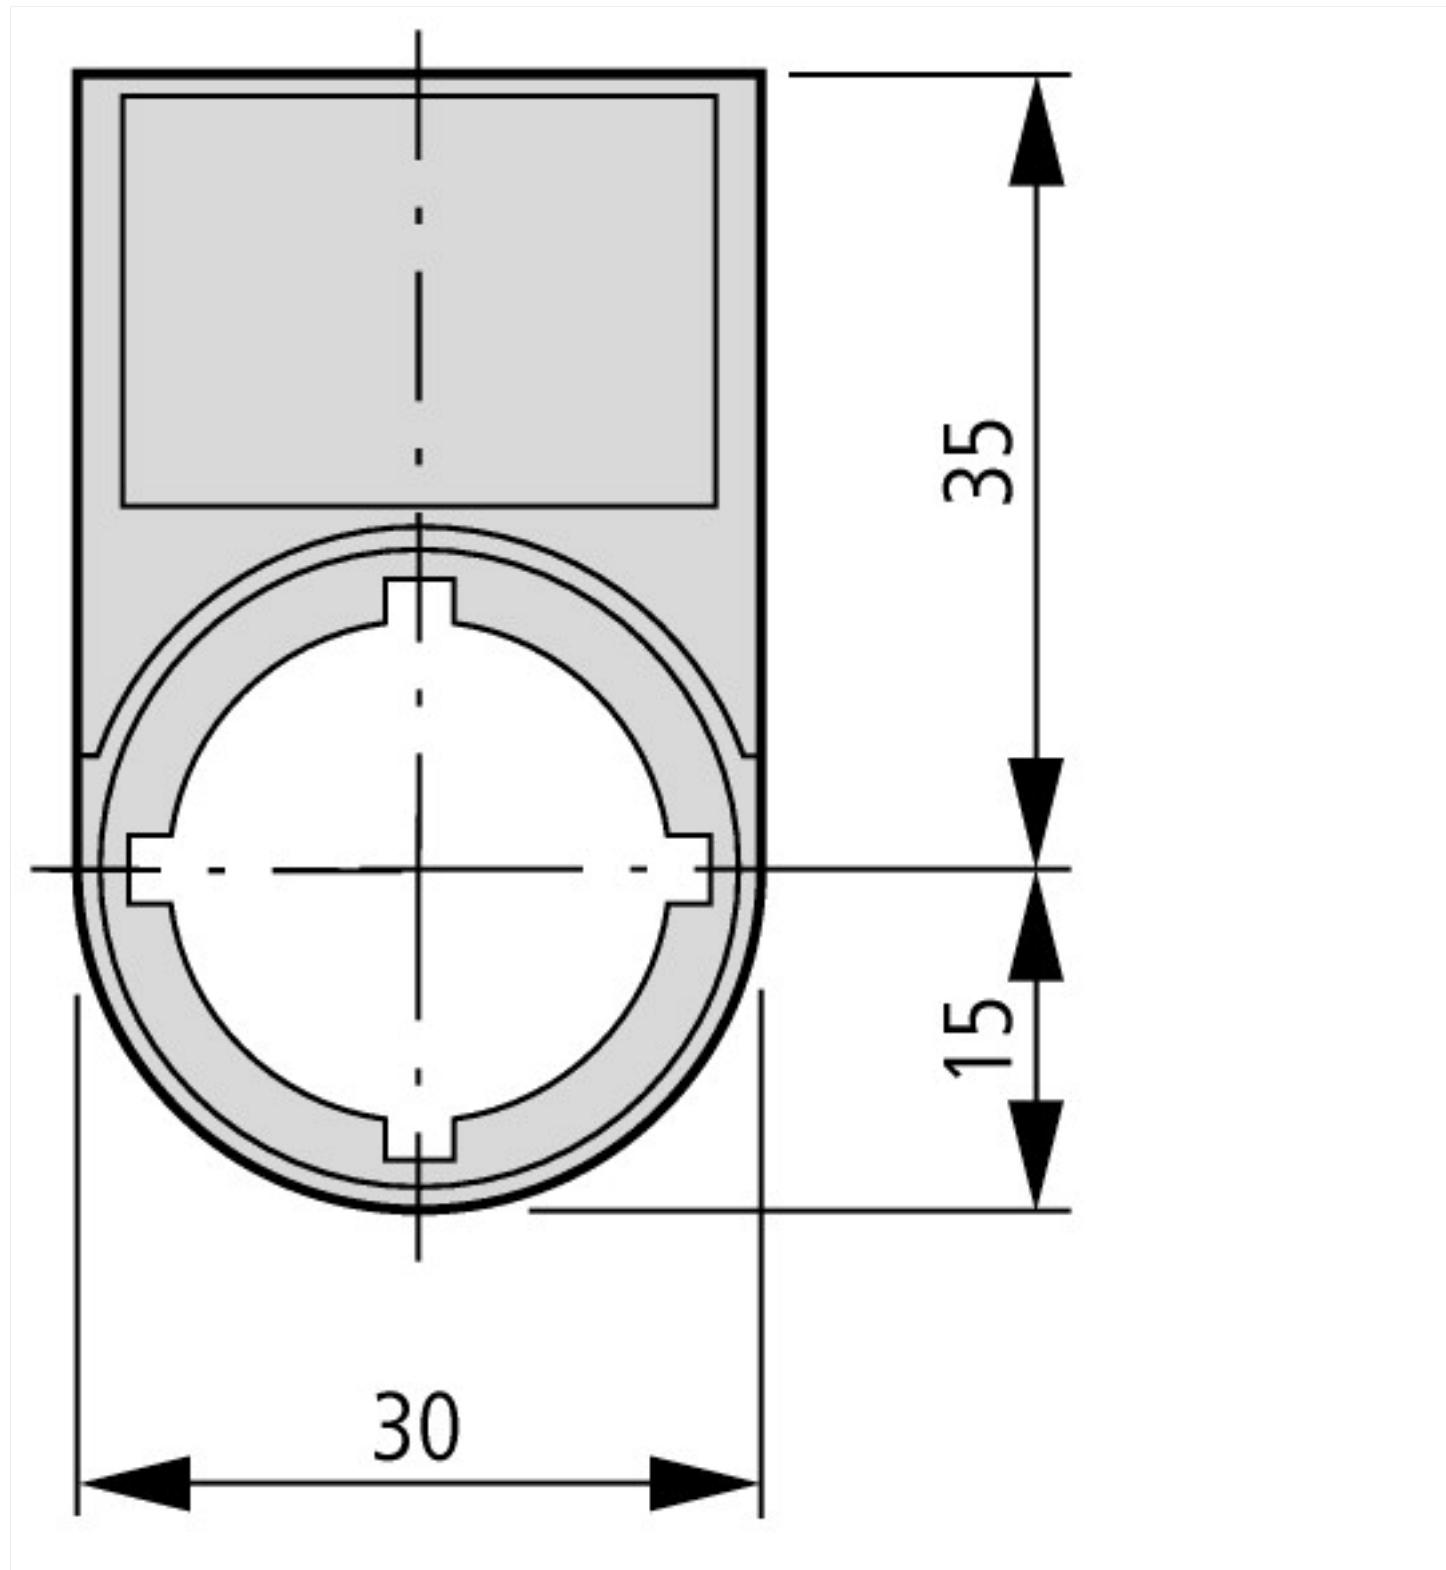

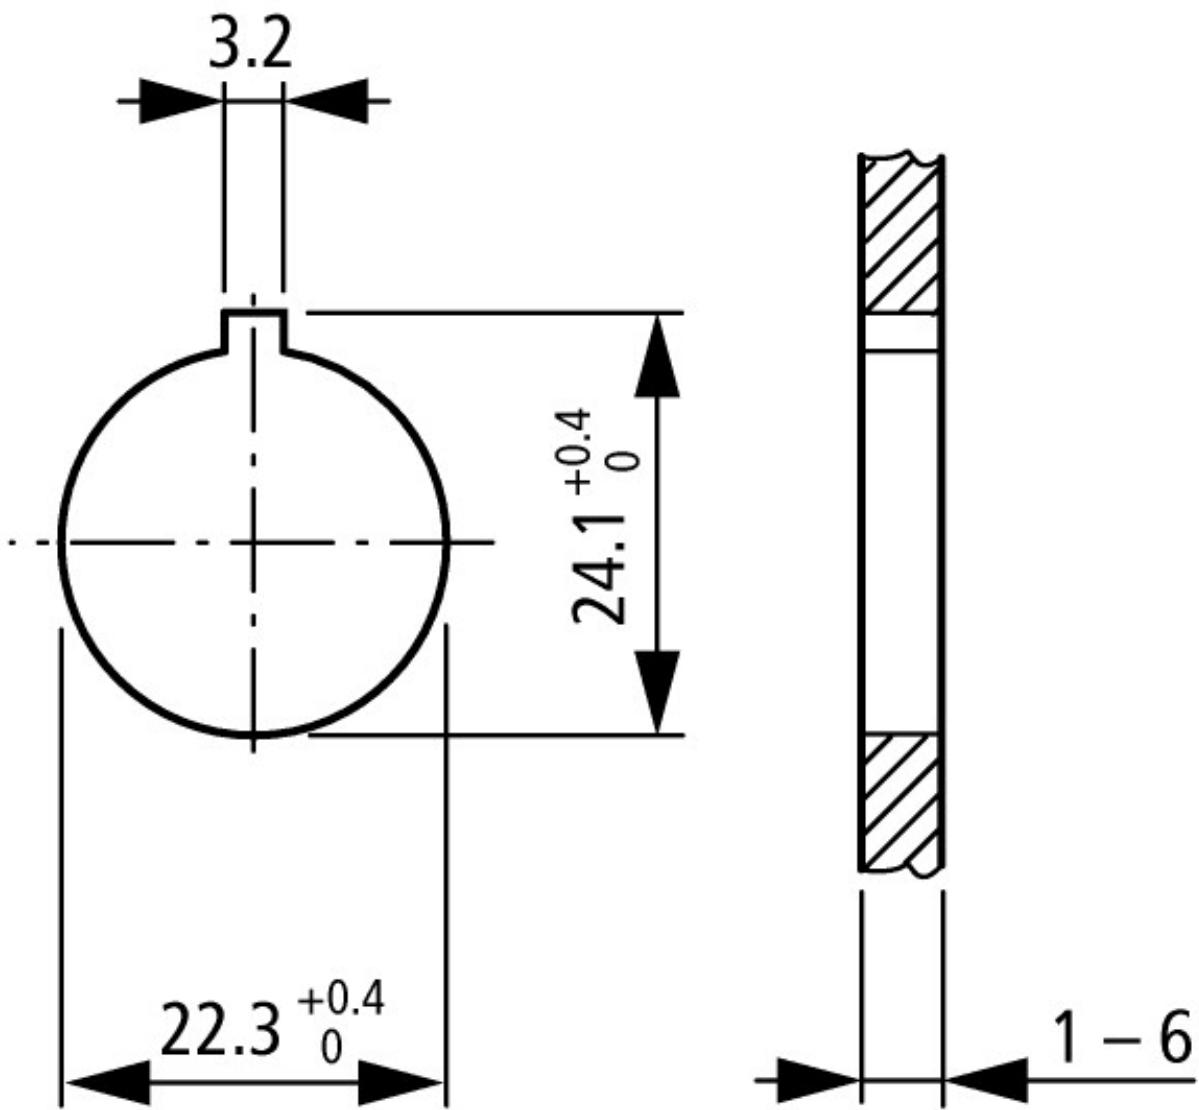

Mounting hole with lug slot

Actuating and indicator elements

Assets (links)

Declaration of CE Conformity

00003256