

compact Pin Busbar, 10mm² connection: 3p/N 6x AFDD 5SM6 + 6x compact device 1-pole touch protected 12 MW fixed length



Model

Product brand name SENTRON

General technical data

Phase number 3
Cross-section 10 mm²
Operating voltage / rated value / maximum 230 V

Current

Continuous current / rated value 63 A

Suitability

Suitability for interaction

- Devices with auxiliary switch No
- Devices with N conductor Yes

Product details

Product feature / insulated Yes

Number

Number of devices / suitable for fitting 6

Connections

Type of electrical connection	Pin
-------------------------------	-----

Mechanical Design

Module width	36 mm
Height	13.7 mm
Width	42.4 mm
Length	200.2 mm
Net weight	99 g

Certificates

Declaration of Conformity



EG-Konf.

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3675-0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3675-0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3675-0

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

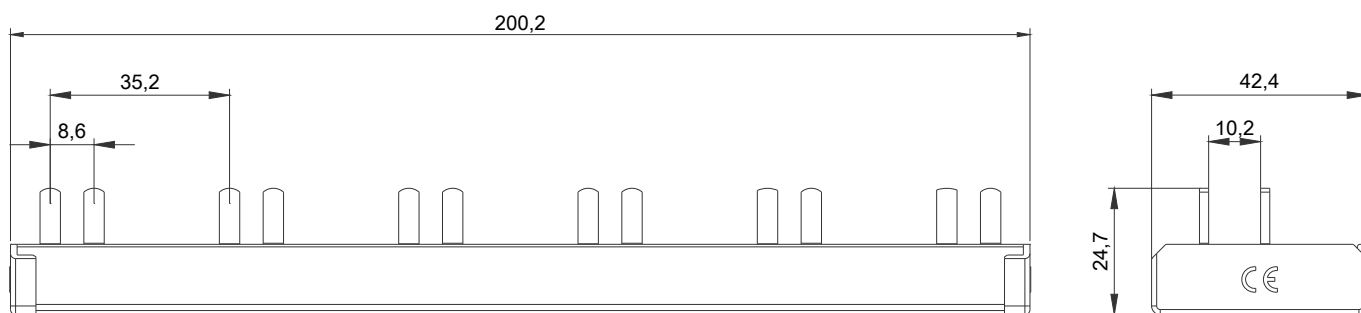

5ST3675-0

