

compact Pin Busbar, 10mm² connection: 1p/N AFDD 5SM6 +
compact device 1-pole + auxiliary switch 0,5-pole touch protected
1000mm cuttable



Model	
Product brand name	SETRON
General technical data	
Phase number	1
Cross-section	10 mm ²
Operating voltage / rated value / maximum	230 V
Current	
Continuous current / rated value	63 A
Suitability	
Suitability for interaction	
• Devices with auxiliary switch	Yes
• Devices with N conductor	Yes
Product details	
Product feature / insulated	Yes
Number	
Number of devices / suitable for fitting	24

Connections

Type of electrical connection

Pin

Mechanical Design

Module width

45 mm

Height

13 mm

Width

40.8 mm

Length

1 035.9 mm

Net weight

392 g

Certificates

Declaration of Conformity



EG-Konf.

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3780-0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3780-0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3780-0

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

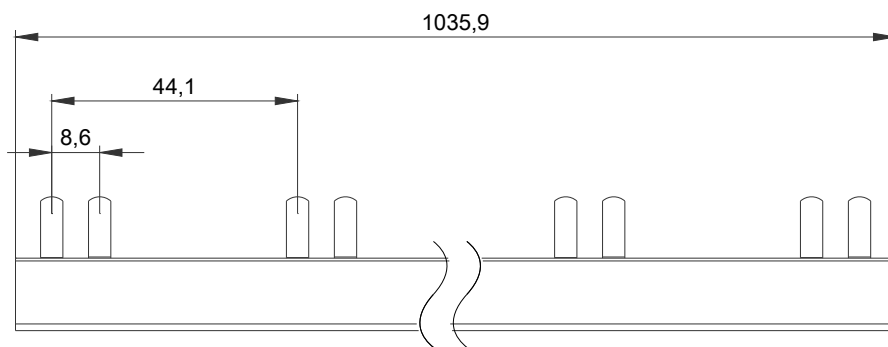

5ST3780-0

