

WIRE CONNECTOR 4 CABLES WITH CONTROL WIRE TAP 4
PCS. ACCESSORY FOR: 3VA15/25 1000



Model

Product brand name	SETRON
Product designation	accessories
Product version	circular conductor terminal





Connections according IEC

Connectable conductor cross-section	
<ul style="list-style-type: none"> • for copper cable / stranded / minimum 	120 mm ²
<ul style="list-style-type: none"> • for copper cable / stranded / maximum 	240 mm ²
<ul style="list-style-type: none"> • for aluminum cable / stranded / minimum 	120 mm ²
<ul style="list-style-type: none"> • for aluminum cable / stranded / maximum 	240 mm ²

Connections according UL

Permissible temperature / of connectable conductor / according to UL 486A-486B	90 °C
--	-------

Certificates

General Product Approval	EMC	Declaration of Conformity	Shipping Approval	other
Miscellaneous 	 RCM	 EG-Konf.	 LRS	Manufacturer Declaration

other
Miscellaneous

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9604-0JC43>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9604-0JC43>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)




http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9604-0JC43

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

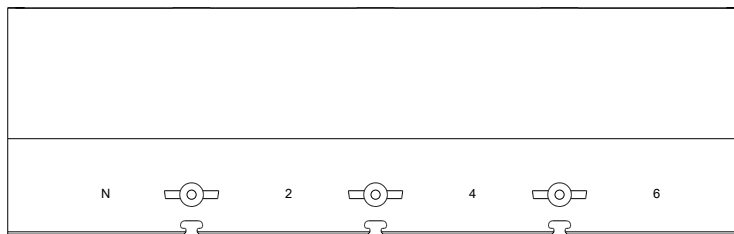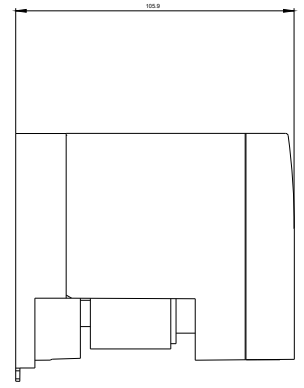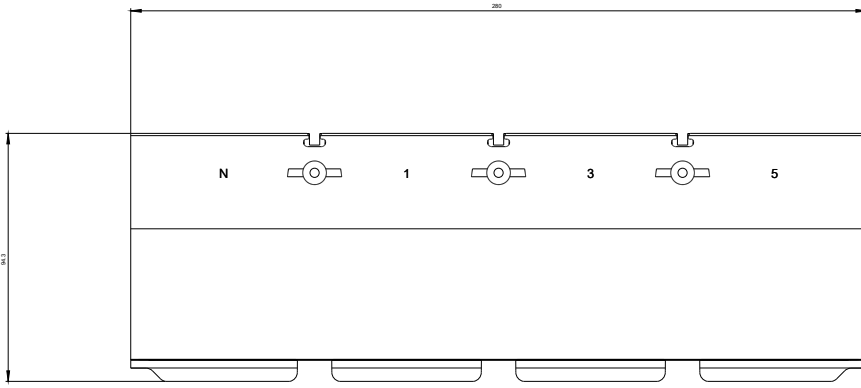

last modified:

11/19/2019