


5046 940410

7021989404101



Light technic

Version:	40°
Type of light source:	LED (not exchangeable)
Wattage:	25W
System wattage:	27.0W
Luminous flux:	2050lm
Efficacy:	76 lm/W
Voltage:	230V
Colour temperature:	4000K
Colour rendering (CRI):	Ra>90
MacAdams factor:	SDCM: 2
Lifetime:	L90/B10>50,000
Light distribution:	Direct
Optic:	Glass Clear
Beam angle:	40°



Control/Dimming

Type: DALI

Protection

Luminaire class:	Class II SELV
Ingress protection rating:	IP44
Ta nominal:	Ta=25°C

Energy and approvals

Energy class:	A+
Approval:	CE

Materials and finish

Housing:	Aluminium
Colour:	Matte white (RAL 9003)
Optics:	Glass

Mounting/Connection


Mounting:	Recessed, Indoor / Outdoor
Plug:	Screwless terminal block
Max. luminaires per circuit breaker:	B10: 35, B16: 57, C10: 58, C16: 95

Dimensions (mm)

Height (H):	112
Diameter (D):	114
Cut-out:	83
Ceiling void depth:	110
Distance to flammable materials:	100mm
Weight (brutto/netto):	0.9

Packaging

Packing dimensions: 140 x 140 x 140

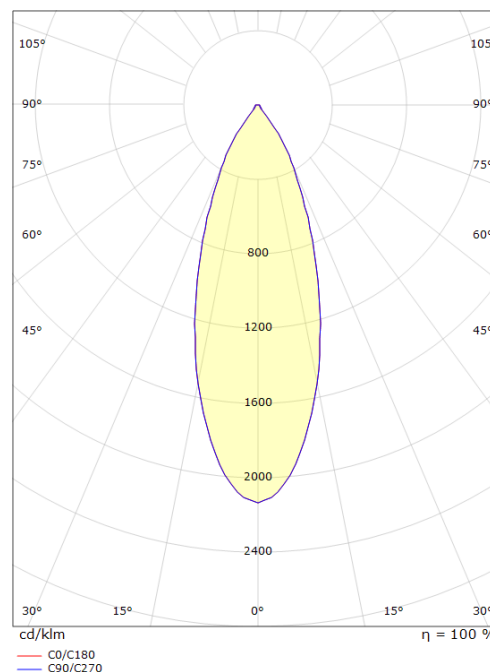

7 0 2 1 9 8 9 4 0 4 1 0 1