


Screw plug

10xx PA

Screw plug	Polyamide PA6 GF30
Connecting thread	Pg as per DIN 40430

Properties


Temperature range (°C)	-30 +100	<ul style="list-style-type: none"> for secure sealing of unused threaded or clearance hole
Protection grade	54	higher protection grade possible if assembled with sealing ring

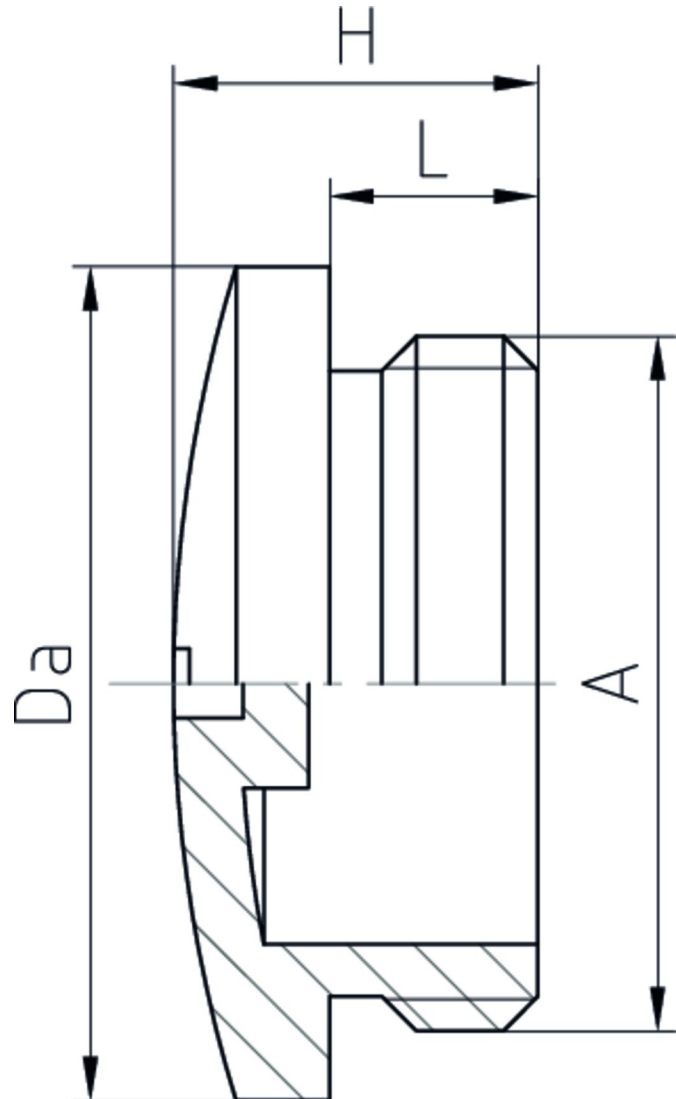


Features



RAL 7035

A	L	H	Da		Part No.
Pg 7	6	10	15	100	1007 PA
Pg 9	6	10	19	100	1009 PA

A	L	H	Da		Part No.
Pg 11	6	10	22	100	1011 PA
Pg 13,5	6	10	25	100	1013 PA
Pg 16	6	10	27	100	1016 PA
Pg 21	8	12,5	33	100	1021 PA
Pg 29	8	13	44,5	100	1029 PA
Pg 36	10	15	55,5	50	1036 PA
Pg 42	10	15,5	62,5	50	1042 PA
Pg 48	12	17	69,5	50	1048 PA