


Product data sheet

Item No. 56.703.9853.0

Installation terminal WKIF 2,5 D-D-SL

Installation terminal block with spring clamp connection for mounting on TS 35, nominal cross section 2.5 mm², width 5 mm, color gra

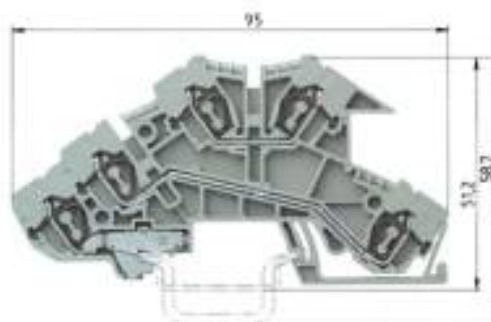

Item No.	56.703.9853.0
EAN	4015573564435
Order Unit	50 Piece(s)

Certificates / Approvals



Technical data

Note

Remark to rated voltage	400V/250V
N-function	No

General

Nominal cross section	2.5 mm ²
Basic colour	Grey
Number of levels	3
Number of clamp positions per level	2
Width/grid dimension	5 mm
Insulating housing	PA666
Inflammability class of insulation material acc. with UL94	V0
Mounting method	DIN rail (top hat rail) 35/7.5 mm
Terminal blocks for electrical installations	Yes

Technical data

Rated current	24 A
Rated voltage	400 V
Rated impulse voltage	4 kV
Pollution degree	3
Closing plate required	Yes
Type of insulation material	Thermoplastic
Length	95 mm

Connection Data

Connection type 1	Tension clamp connection
Connection type 2	Tension clamp connection
Minimum cross section solid	0.14 mm²
Maximum cross section solid	4 mm²
Minimum cross section fine stranded	0.14 mm²
Maximum cross section fine stranded	2.5 mm²
Wire strip length	11 mm

Technical Data UL/CSA

Cross section UL	22-12 AWG
Current factory wiring	20 A
Current field wiring	20 A
Cross section CSA	22-14 AWG
Voltage CSA	300 V
Current CSA	20 A

Technical drawing

