


## Product data sheet

Item No. 57.404.8355.5

### Multi-tier terminal WK 4 E / U G-URL/V0

Multi-tier function terminal block with screw connection for mounting on TS 35 and TS 32, nominal cross section 4 mm<sup>2</sup>, width 6 mm, color red

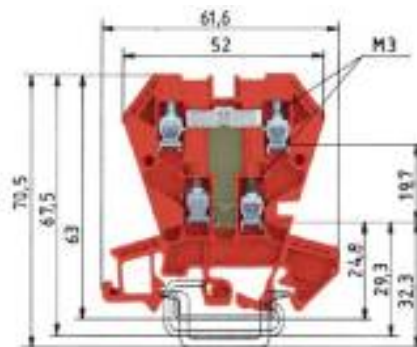

Item No.	57.404.8355.5
EAN	4015573604711
Order Unit	100 Piece(s)

### Certificates / Approvals



### Technical data

#### General

Nominal cross section	4 mm <sup>2</sup>
Colour	Red
Number of levels	2
Number of clamp positions per level	2
Width/grid dimension	6 mm
Insulating housing	PA666
Inflammability class of insulation material acc. with UL94	V0
Mounting method	DIN rail (top hat rail)/G-rail
Terminal blocks for electrical installations	No
Type of component	Diode

#### Technical data

Rated current	1 A
Rated voltage	400 V
Pollution degree	3
Closing plate required	Yes
Type of insulation material	Thermoplastic
Length	61.6 mm

#### Connection Data

Connection type 1	Screw connection
Connection type 2	Screw connection
Minimum cross section solid	0.5 mm <sup>2</sup>
Maximum cross section solid	4 mm <sup>2</sup>

Minimum cross section fine stranded	0.5 mm²
Maximum cross section fine stranded	4 mm²
Wire strip length	9 mm
Torque conductor mounting	0.5 Nm

### Technical Data UL/CSA

Cross section UL	22-10 AWG
Voltage UL	300 V
Current factory wiring	20 A
Current field wiring	20 A
Cross section CSA	20-12 AWG
Voltage CSA	300 V
Current CSA	10 A

## Technical drawing

