



**Overload relay, I<sub>r</sub> = 70 - 100 A, 1 N/O, 1 N/C, For use with: DILM250**

**Part no.** Z5-100/FF250  
**Catalog No.** 210071  
**Alternate Catalog No.** XTOB100LC1  
**EL-Nummer (Norway)** 4134168

## Delivery program

|                           |  |  |  |
|---------------------------|--|--|--|
| Product range             |  |  | Overload relay Z5  |
| Phase-failure sensitivity |  |  | IEC/EN 60947, VDE 0660 Part 102                                      |
| Description               |  |  | Test/off button<br>Reset pushbutton manual/auto<br>Trip-free release |
| Mounting type             |  |  | Direct mounting<br>Separate mounting                                 |

## Setting range

|                   |                |   |  |
|-------------------|----------------|---|--|
| Overload releases | I <sub>r</sub> | A | 70 - 100   |
| Contact sequence  |                |   |  |

## Auxiliary contacts

|                       |  |  |         |
|-----------------------|--|--|---------|
| N/O = Normally open   |  |  | 1 N/O   |
| N/C = Normally closed |  |  | 1 N/C   |
| For use with          |  |  | DILM250 |

## Short-circuit protection

|                       |       |   |     |
|-----------------------|-------|---|-----|
| Type "1" coordination | gG/gL | A | 315 |
| Type "2" coordination | gG/gL | A | 200 |



## Notes

Overload release: tripping class 10 A

Short-circuit protection: Observe the maximum permissible fuse of the contactor with direct device mounting.

## Notes

Fitted directly to the contactor



1 Contactor

## Technical data

|                   |  |  |  |
|-------------------|--|--|--|
| Standards         |  |  | IEC/EN 60947, VDE 0660, UL, CSA  |
| Climatic proofing |  |  | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30 |

|   |  |    |  |
|---|--|----|--|
| Ambient temperature   |  |    |  |
| Open  |  | °C | -25 - +60                                |
| Enclosed  |  | °C | - 25 - 40                                |
| Temperature compensation  |  |    | Continuous                               |
| Weight  |  | kg | 1.55                                     |
| Mechanical shock resistance   |  | g  | 10<br>Sinusoidal<br>Shock duration 10 ms |
| Degree of Protection  |  |    | IP00                                     |
| Protection against direct contact when actuated from front (EN 50274) |  |    | With terminal cover                      |
| Altitude  |  | m  | Max. 2000                                |

### Main conducting paths

|  |                  |                 |               |
|--|------------------|-----------------|---------------|
| Rated impulse withstand voltage                | U <sub>imp</sub> | V AC            | 8000          |
| Overvoltage category/pollution degree          |                  |                 | III/3         |
| Rated insulation voltage                       | U <sub>i</sub>   | V               | 1000          |
| Rated operational voltage                      | U <sub>e</sub>   | V AC            | 1000          |
| Safe isolation to EN 61140                     |                  |                 |               |
| Between auxiliary contacts and main contacts   |                  | V AC            | 500           |
| Between main circuits                          |                  | V AC            | 500           |
| Temperature compensation residual error > 40°C |                  |                 | ≤ 0.25 %/K    |
| Current heat loss (3 conductors)               |                  |                 |               |
| Lower value of the setting range               |                  | W               | 10            |
| Maximum setting                                |                  | W               | 21            |
| Terminal capacities                            |                  | mm <sup>2</sup> |               |
| Flexible with cable lug                        |                  | mm <sup>2</sup> | 185           |
| Stranded with cable lug                        |                  | mm <sup>2</sup> | 185           |
| Solid or stranded                              |                  | AWG             | 2/0 - 500 MCM |
| Busbar   | Width            | mm              | 25            |
| Terminal screw                                 |                  |                 | M10 x 35      |
| Tightening torque                              |                  | Nm              | 18            |
| Tools  |                  |                 |               |
| Hexagon head spanner                           | SW               | mm              | 16            |

### Auxiliary and control circuits

|                                       |                  |                 |                                      |
|---------------------------------------|------------------|-----------------|--------------------------------------|
| Rated impulse withstand voltage       | U <sub>imp</sub> | V               | 4000                                 |
| Overvoltage category/pollution degree |                  |                 | III/3                                |
| Terminal capacities                   |                  | mm <sup>2</sup> |                                      |
| Solid                                 |                  | mm <sup>2</sup> | 1 x (0.75 - 4)<br>2 x (0.75 - 4)     |
| Flexible with ferrule                 |                  | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5) |
| Solid or stranded                     |                  | AWG             | 2 x (18 - 14)                        |
| Terminal screw                        |                  |                 | M3.5                                 |
| Tightening torque                     |                  | Nm              | 1.2                                  |
| Stripping length                      |                  | mm              | 8                                    |
| Tools                                 |                  |                 |                                      |
| Pozidriv screwdriver                  |                  | Size            | 2                                    |
| Standard screwdriver                  |                  | mm              | 1 x 6                                |
| Rated insulation voltage              | U <sub>i</sub>   | V AC            | 500                                  |
| Rated operational voltage             | U <sub>e</sub>   | V AC            | 500                                  |
| Safe isolation to EN 61140            |                  |                 |                                      |
| between the auxiliary contacts        |                  | V AC            | 240                                  |
| Conventional thermal current          | I <sub>th</sub>  | A               | 6                                    |
| Rated operational current             | I <sub>e</sub>   | A               |                                      |
| AC-15                                 |                  |                 |                                      |
| Make contact                          |                  |                 |                                      |
| 120 V                                 | I <sub>e</sub>   | A               | 1.5                                  |

|                                      |                |         |   |
|--------------------------------------|----------------|---------|---|
| 220 V 230 V 240 V                    | I <sub>e</sub> | A       | 1.5   |
| 380 V 400 V 415 V                    | I <sub>e</sub> | A       | 0.5   |
| 500 V                                | I <sub>e</sub> | A       | 0.5   |
| Break contact                        |                |         |   |
| 120 V                                | I <sub>e</sub> | A       | 1.5   |
| 220 V 230 V 240 V                    | I <sub>e</sub> | A       | 1.5   |
| 380 V 400 V 415 V                    | I <sub>e</sub> | A       | 0.9   |
| 500 V                                | I <sub>e</sub> | A       | 0.8   |
| DC L/R ≤ 15 ms                       |                |         |   |
|                                      |                |         | Switch-on and switch-off conditions based on DC-13, time constant as specified. |
| 24 V                                 | I <sub>e</sub> | A       | 0.9   |
| 60 V                                 | I <sub>e</sub> | A       | 0.75  |
| 110 V                                | I <sub>e</sub> | A       | 0.4   |
| 220 V                                | I <sub>e</sub> | A       | 0.2   |
| Short-circuit rating without welding |                |         |   |
| max. fuse                            |                | A gG/gL | 6   |

## Notes

**Notes** Ambient air temperature: Operating range to IEC/EN 60947

## Rating data for approved types

|                              |  |      |  |
|------------------------------|--|------|--|
| Auxiliary contacts           |  |      |  |
| Pilot Duty                   |  |      |  |
| AC operated                  |  |      | B300 at opposite polarity<br>B600 at same polarity |
| DC operated                  |  |      | R300   |
| Short Circuit Current Rating |  | SCCR |  |
| Basic Rating                 |  |      |  |
| SCCR                         |  | kA   | 10   |
| max. Fuse                    |  | A    | 400 Class J  |
| max. CB                      |  | A    | 400  |

## Design verification as per IEC/EN 61439

|  |                   |    |  |
|--|-------------------|----|--|
| Technical data for design verification   |                   |    |  |
| Rated operational current for specified heat dissipation   | I <sub>n</sub>    | A  | 100  |
| Heat dissipation per pole, current-dependent   | P <sub>vid</sub>  | W  | 7.9  |
| Equipment heat dissipation, current-dependent  | P <sub>vid</sub>  | W  | 23.7   |
| Static heat dissipation, non-current-dependent   | P <sub>vs</sub>   | W  | 0  |
| Heat dissipation capacity  | P <sub>diss</sub> | W  | 0  |
| Operating ambient temperature min.   |                   | °C | -25  |
| Operating ambient temperature max.   |                   | °C | 60   |
| IEC/EN 61439 design verification   |                   |    |  |
| 10.2 Strength of materials and parts   |                   |    |  |
| 10.2.2 Corrosion resistance  |                   |    | Meets the product standard's requirements.                         |
| 10.2.3.1 Verification of thermal stability of enclosures   |                   |    | Meets the product standard's requirements.                         |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |                   |    | Meets the product standard's requirements.                         |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |                   |    | Meets the product standard's requirements.                         |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |                   |    | Meets the product standard's requirements.                         |
| 10.2.5 Lifting   |                   |    | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.6 Mechanical impact   |                   |    | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.7 Inscriptions  |                   |    | Meets the product standard's requirements.                         |
| 10.3 Degree of protection of ASSEMBLIES  |                   |    | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.4 Clearances and creepage distances   |                   |    | Meets the product standard's requirements.                         |
| 10.5 Protection against electric shock   |                   |    | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.6 Incorporation of switching devices and components   |                   |    | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.7 Internal electrical circuits and connections  |                   |    | Is the panel builder's responsibility.                             |


|  |  |  |  |
|--|--|--|--|
| 10.8 Connections for external conductors                 |  |  | Is the panel builder's responsibility.   |
| 10.9 Insulation properties                               |  |  |  |
| 10.9.2 Power-frequency electric strength                 |  |  | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage                         |  |  | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material |  |  | Is the panel builder's responsibility.   |
| 10.10 Temperature rise                                   |  |  | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating                               |  |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility                      |  |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function                                |  |  | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 7.0

|  |  |   |                   |
|--|--|---|-------------------|
| Low-voltage industrial components (EG000017) / Thermal overload relay (EC000106)   |  |   |                   |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Overload protection device / Thermal overload relay (ecl@ss10.0.1-27-37-15-01 [AKF075014]) |  |   |                   |
| Adjustable current range   |  | A | 70 - 100          |
| Max. rated operation voltage Ue  |  | V | 1000              |
| Mounting method  |  |   | Direct attachment |
| Type of electrical connection of main circuit  |  |   | Screw connection  |
| Number of auxiliary contacts as normally closed contact  |  |   | 1                 |
| Number of auxiliary contacts as normally open contact  |  |   | 1                 |
| Number of auxiliary contacts as change-over contact  |  |   | 0                 |
| Release class  |  |   | CLASS 10          |
| Reset function input   |  |   | No                |
| Reset function automatic   |  |   | Yes               |
| Reset function push-button   |  |   | Yes               |


## Approvals

|                                      |  |  |  |
|--------------------------------------|--|--|--|
| Product Standards                    |  |  | IEC/EN 60947-4-1; UL 60947-4-1; CSA - C22.2 No. 60947-4-1-14; CE marking |
| UL File No.                          |  |  | E29184   |
| UL Category Control No.              |  |  | NKCR   |
| CSA File No.                         |  |  | 12528  |
| CSA Class No.                        |  |  | 3211-03  |
| North America Certification          |  |  | UL listed, CSA certified   |
| Specially designed for North America |  |  | No   |
| Suitable for                         |  |  | Branch circuits  |
| Max. Voltage Rating                  |  |  | 600 V AC   |
| Degree of Protection                 |  |  | IEC: IP00, UL/CSA Type: -  |

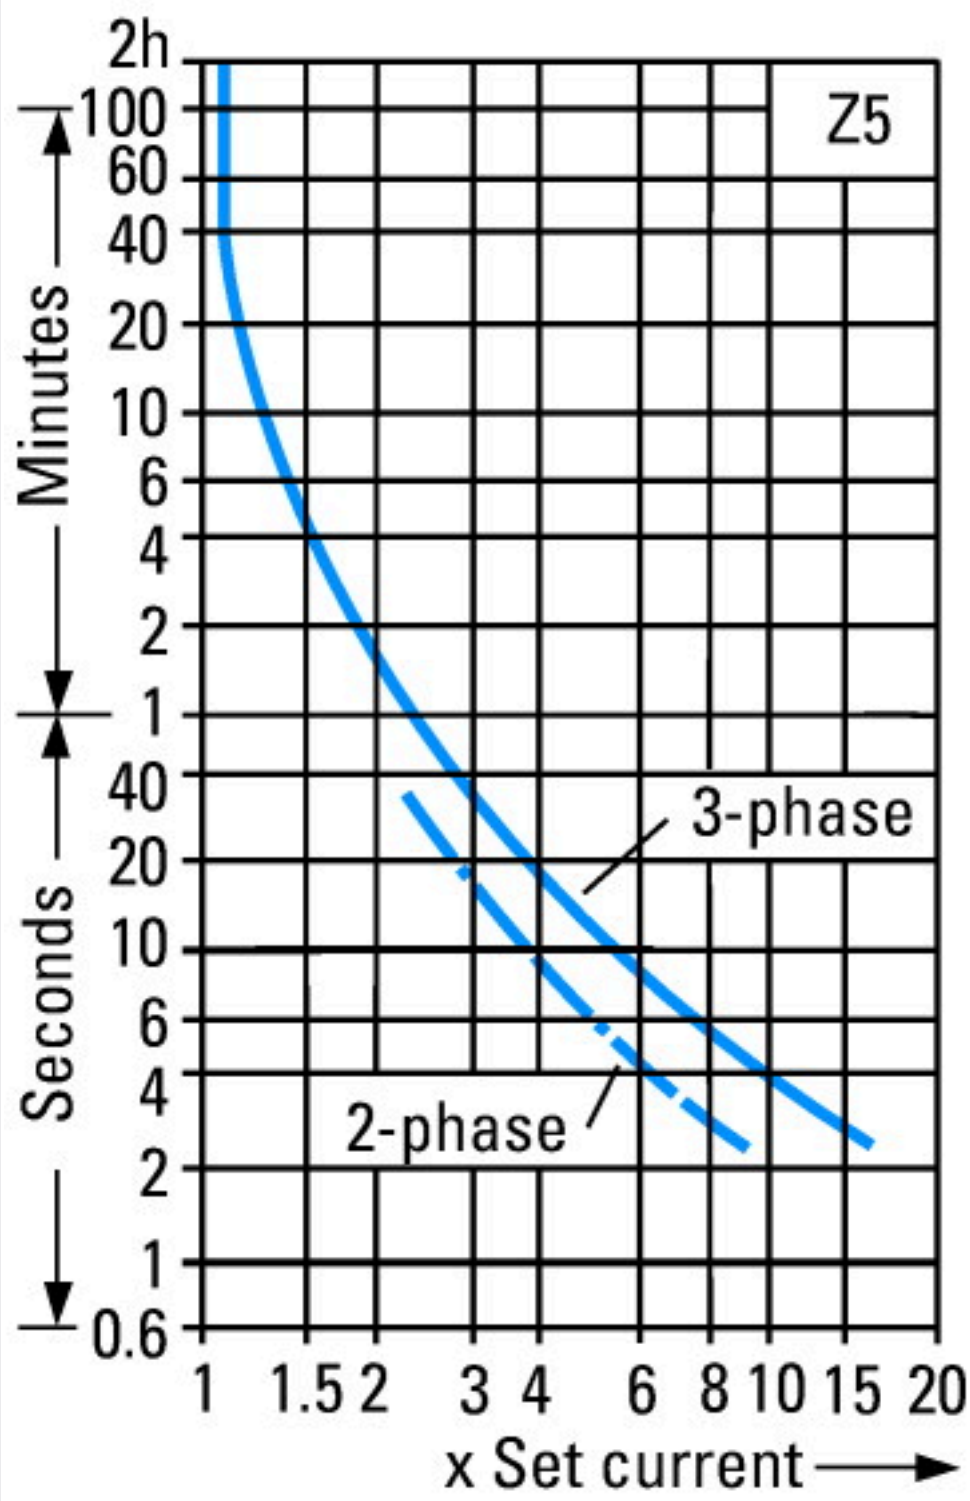

These tripping characteristics are mean values of the spreads at 20 °C ambient air temperature in a cold state.  
Tripping time depends on response current.  
When the devices are at operational temperature the tripping time of the overload relay falls to approx. 25 % of the read off value.

Tolerances for tripping times: max.  $\pm 20\%$   
Toleranzen für Auslösezeiten: max.  $\pm 20\%$   
Tolérances temps de déclenchement:  $\pm 20\%$

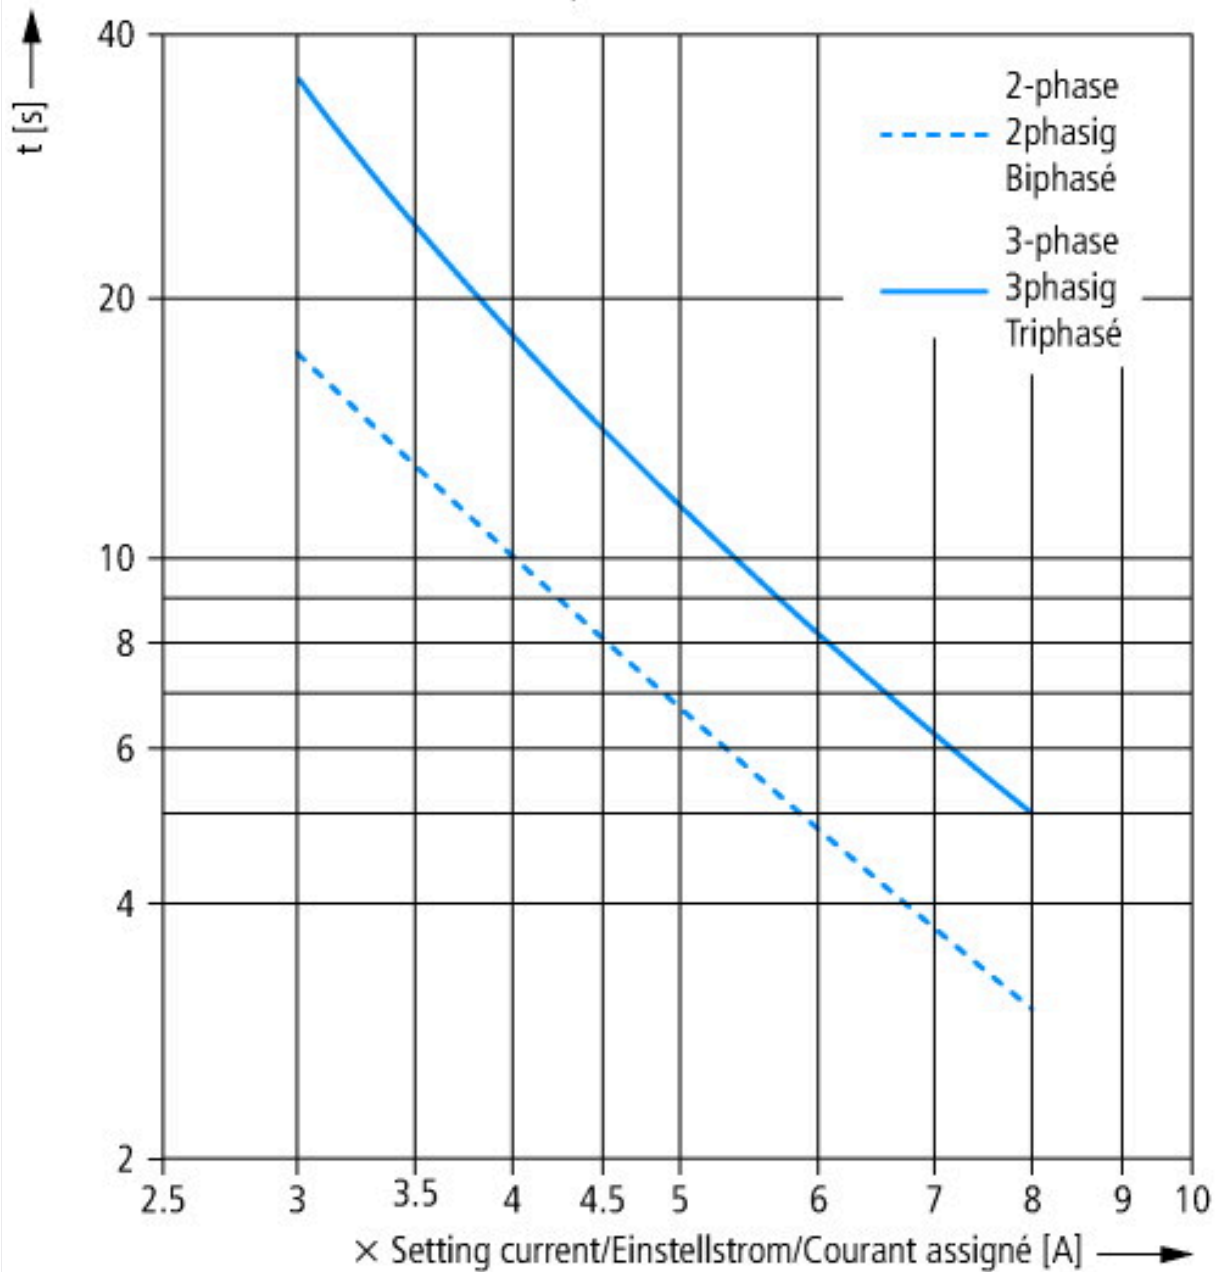

[illegible]

**Declaration of CE Conformity**  
00002879

**Instruction Leaflets**  
IL03407006Z2018\_03

**Manuals**  
h1476dgb (English)