

Select your language

- [German](#)
- [English](#)
- [Spanish](#)
- [French](#)
- [Dutch](#)
- [Italian](#)
- [Polish](#)
- [Czech](#)
- [Russian](#)
- [Norwegian Bokmål](#)

Worldwide English




DILM32-XSP(230V50HZ,240V60HZ) - Replacement coil, Tool-less plug connection, 230 V 50 Hz, 240 V 60 Hz, AC, For use with: DILM17, DILM25, DILM32, DILM38, DILM32 - DILM45



281141 DILM32-XSP(230V50HZ,240V60HZ)

[Overview](#) [Specifications](#) [Resources](#)

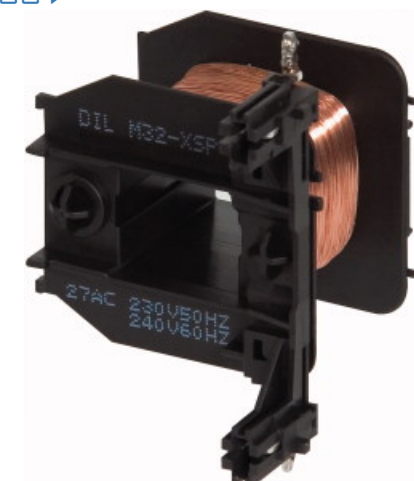

- [Delivery program](#)
- [Design verification as per IEC/EN 61439](#)
- [Technical data ETIM 7.0](#)
- [Approvals](#)

281141 DILM32-XSP(230V50HZ,240V60HZ)

Replacement coil, Tool-less plug connection, 230 V 50 Hz, 240 V 60 Hz, AC, For use with: DILM17, DILM25, DILM32, DILM38, DILM32 - DILM45

Alternate Catalog No.

XTCERENCOILCF

EL-Nummer (Norway)

4130502

Replacement coil, Connection technique: Tool-less plug connection, Actuating voltage: 230 V 50 Hz, 240 V 60 Hz, Voltage AC/DC: AC, For use with: DILM17, DILM25, DILM32, DILM38, DILM32 - DILM45, DILM17 - DILM38

Delivery program

Actuating voltage

230 V 50 Hz, 240 V 60 Hz

Voltage AC/DC

AC

For use with

DILM17

DILM25

DILM32

DILM38

DILM32 - DILM45

For use with

DILM17 - DILM38

Design verification as per IEC/EN 61439

Operating ambient temperature min.

-25 °C

Operating ambient temperature max.

+60 °C

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Coil for relay (EC001043)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Contactor (LV) / Reel

for contactor (ecl@ss10.0.1-27-37-10-12 [AKF021013])
Rated control supply voltage U_s at AC 50Hz
230 - 230 V
Rated control supply voltage U_s at AC 60Hz
240 - 240 V
Rated control supply voltage U_s at DC
0 - 0 V
Voltage type for actuating
AC

Approvals

Product Standards
IEC/EN 60947-4-1; UL 508; CSA-C22.2 No. 14-05; CE marking
UL File No.
E29096
UL Category Control No.
NLDX
CSA File No.
012528
CSA Class No.
2411-03, 3211-04
North America Certification
UL listed, CSA certified
Specially designed for North America
No

Additional product information


- [Motor starters and "Special Purpose Ratings" for the North American market](#)
(PDF)
- [Switchgear of Power Factor Correction Systems](#)
(PDF)
- [X-Start - Modern Switching Installations Efficiently Fitted and Wired Securely](#)
(PDF)
- [Mirror Contacts for Highly-Reliable Information Relating to Safety-Related Control Functions](#)
(PDF)
- [Effect of the Cable Capacitance of Long Control Cables on the Actuation of Contactors](#)
(PDF)
- [Switchgear for Luminaires](#)
(PDF)
- [Standard Compliant and Functionally Safe Engineering Design with Mechanical Auxiliary Contacts](#)
(PDF)
- [The Interaction of Contactors with PLCs](#)
(PDF)
- [Busbar Component Adapters for modern Industrial control panels](#)
(PDF)

Product photo



2100PIC-47
Photo
Individual coil

3D drawing



2100DRV-102
Line drawing

Individual coil

Standards

- 
0002153
Logo
xStart logo

Instruction Leaflet

- [Coil exchange: DILM17 to DILM38, DILMP32 to DILMP45 \(IL03407036Z\)](#)
Asset
(PDF, multilingual)

Declaration of Conformity

EU

- [DILM17-DILM38 - Contactors and contactor combinations \(DA-DC-00004096\)](#)
Asset
(PDF)
- [DILM17-DILM38 -EA - Contactors and contactor combinations \(DA-DC-00004102\)](#)
Asset
(PDF)

Download-Center

- [Download-Center \(this item\)](#)
Eaton EMEA Download-Center - download data for this item
- [Download-Center](#)
Eaton EMEA Download-Center



[Generate data sheet in PDF format](#)



[Generate data sheet in Excel format](#)



[Write a comment](#)

[Imprint](#) [Privacy Policy](#) [Legal Disclaimer](#) [Terms and Conditions](#)

© 2021 by Eaton Industries GmbH

