




Position switch, Actuating rod, Complete unit, 1 N/O, 1 NC, Snap-action contact - Yes, Screw terminal, Yellow, Insulated material, -25 - +70 °C



Part no. LS-S11S/RR
Catalog No. 106804
Alternate Catalog No. LS-S11S-RR
EL-Nummer (Norway) 4315217

Delivery program

Basic function	Position switches Safety position switches
Part group reference	LS(M)-...
Product range	Actuating rod
Degree of Protection	IP66, IP67
Features	Complete unit
Ambient temperature	°C -25 - +70
Snap-action contact	Yes
Contacts	
N/O = Normally open	1 N/O
N/C = Normally closed	1 NC
Notes	= safety function, by positive opening to IEC/EN 60947-5-1
Contact sequence	
Contact travel = Contact closed = Contact open	
Positive opening (ZW)	yes
Colour	
Enclosure covers	Yellow
Enclosure covers	
Housing	Insulated material
Connection type	Screw terminal
Notes The operating head can be rotated at 90° intervals to adapt to the specified approach direction.	

Technical data

General

Standards		IEC/EN 60947
Climatic proofing		Damp heat, constant, to IEC 60068-2-78; damp heat, cyclical, to IEC 60068-2-30
Ambient temperature	°C	-25 - +70
Mounting position		As required
Degree of Protection		IP66, IP67
Terminal capacities	mm ²	
Solid	mm ²	1 x (0.5 - 2.5)
Flexible with ferrule	mm ²	1 x (0.5 - 1.5)
Repetition accuracy	mm	0.15

Contacts/switching capacity

Rated impulse withstand voltage	U _{imp}	V AC	4000
Rated insulation voltage	U _i	V	400
Overvoltage category/pollution degree			III/3
Rated operational current	I _e	A	
AC-15			
24 V	I _e	A	6
220 V 230 V 240 V	I _e	A	6
380 V 400 V 415 V	I _e	A	4
DC-13			
24 V	I _e	A	3
110 V	I _e	A	0.6
220 V	I _e	A	0.3
Control circuit reliability			
at 24 V DC/5 mA	H _F	Fault probability	< 10 ⁻⁷ , < 1 fault in 10 ⁷ operations
at 5 V DC/1 mA	H _F	Fault probability	< 5 x 10 ⁻⁶ , < 1 failure at 5 x 10 ⁶ operations
Supply frequency	Hz		max. 400
Short-circuit rating to IEC/EN 60947-5-1			
max. fuse	A gG/gL		6
Rated conditional short-circuit current	kA		1

Mechanical variables

Lifespan, mechanical	Operations	x 10 ⁶	8
Mechanical shock resistance (half-sinusoidal shock, 20 ms)			
Standard-action contact	g		25
Operating frequency	Operations/h		≤ 6000

Actuation

Mechanical			
Actuating force at beginning/end of stroke	N		1.0/8.0
Actuating torque of rotary drives	Nm		0.2
Max. operating speed with DIN cam	m/s		1.5
Notes			L = 130 mm

Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	I _n	A	6
Heat dissipation per pole, current-dependent	P _{vid}	W	0.17
Equipment heat dissipation, current-dependent	P _{vid}	W	0
Static heat dissipation, non-current-dependent	P _{vs}	W	0
Heat dissipation capacity	P _{diss}	W	0
Operating ambient temperature min.	°C		-25
Operating ambient temperature max.	°C		70
IEC/EN 61439 design verification			

10.2 Strength of materials and parts	
10.2.2 Corrosion resistance	Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures	Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat	Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects	Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation	Meets the product standard's requirements.
10.2.5 Lifting	Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact	Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions	Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES	Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances	Meets the product standard's requirements.
10.5 Protection against electric shock	Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components	Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections	Is the panel builder's responsibility.
10.8 Connections for external conductors	Is the panel builder's responsibility.
10.9 Insulation properties	
10.9.2 Power-frequency electric strength	Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.10 Temperature rise	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0


Sensors (EG000026) / End switch (EC000030)	
Electric engineering, automation, process control engineering / Binary sensor technology, safety-related sensor technology / Position switch / Position switch (Type 1) (ecl@ss10.0.1-27-27-06-01 [AGZ382015])	
Width sensor	mm 31
Diameter sensor	mm 0
Height of sensor	mm 61
Length of sensor	mm 33.5
Rated operation current I_e at AC-15, 24 V	A 6
Rated operation current I_e at AC-15, 125 V	A 6
Rated operation current I_e at AC-15, 230 V	A 6
Rated operation current I_e at DC-13, 24 V	A 3
Rated operation current I_e at DC-13, 125 V	A 0.8
Rated operation current I_e at DC-13, 230 V	A 0.3
Switching function	Quick-break switch
Switching function latching	No
Output electronic	No
Forced opening	Yes
Number of safety auxiliary contacts	1
Number of contacts as normally closed contact	1
Number of contacts as normally open contact	1
Number of contacts as change-over contact	0
Type of interface	None
Type of interface for safety communication	None
Construction type housing	Cuboid
Material housing	Plastic
Coating housing	Other
Type of control element	Actuating rod
Alignment of the control element	Other

Type of electric connection	Other
With status indication	No
Suitable for safety functions	Yes
Explosion safety category for gas	None
Explosion safety category for dust	None
Ambient temperature during operating	°C 25 - 70
Degree of protection (IP)	IP67
Degree of protection (NEMA)	4X

Approvals

Product Standards	IEC/EN 60947-5; UL 508; CSA-C22.2 No. 14; CE marking
UL File No.	E29184
UL Category Control No.	NKCR
CSA File No.	12528
CSA Class No.	3211-03
North America Certification	UL listed, CSA certified
Degree of Protection	IEC: IP66, 67, UL/CSA Type 3R, 4X (indoor use only), 12, 13

Dimensions

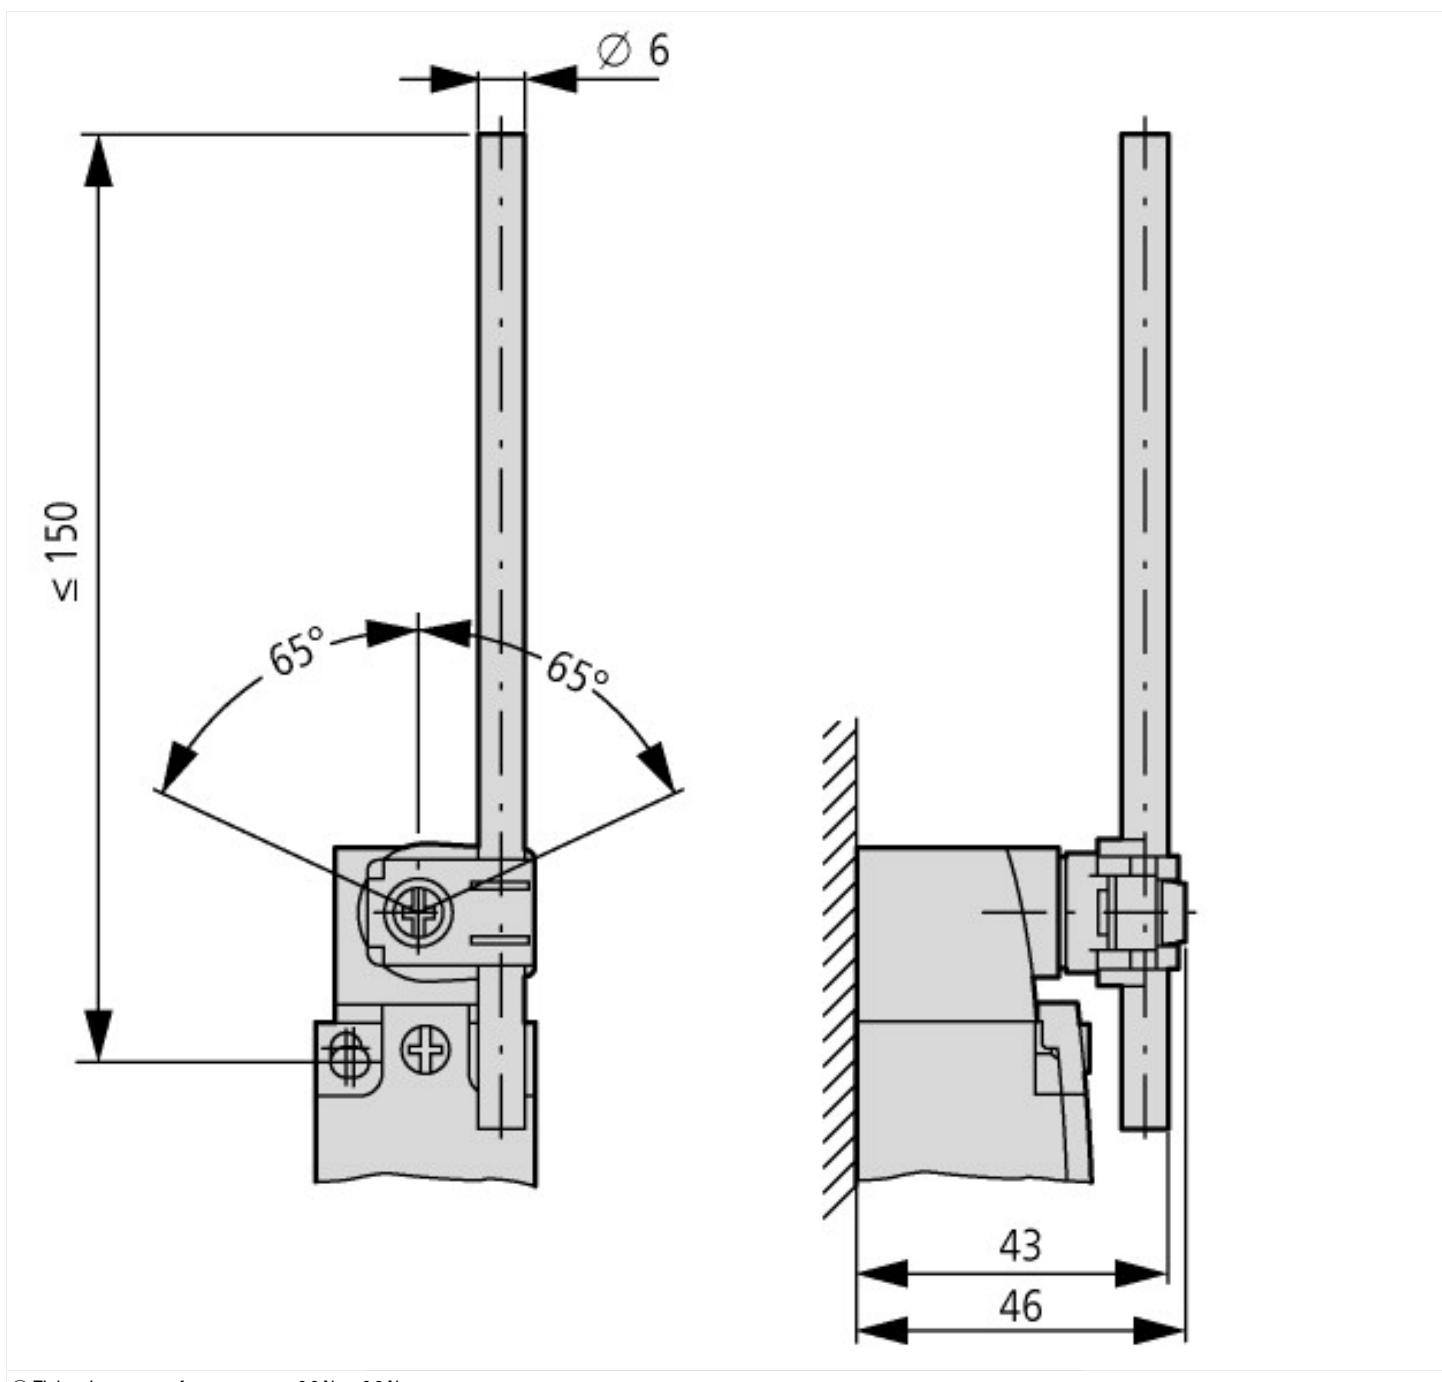


① Tightening torque of cover screws: 0.8 Nm ± 0.2 Nm

② only with LS (insulated version)

③ Fixing screws 2 x M4 \geq 30

$M_A = 1.5 \text{ Nm}$

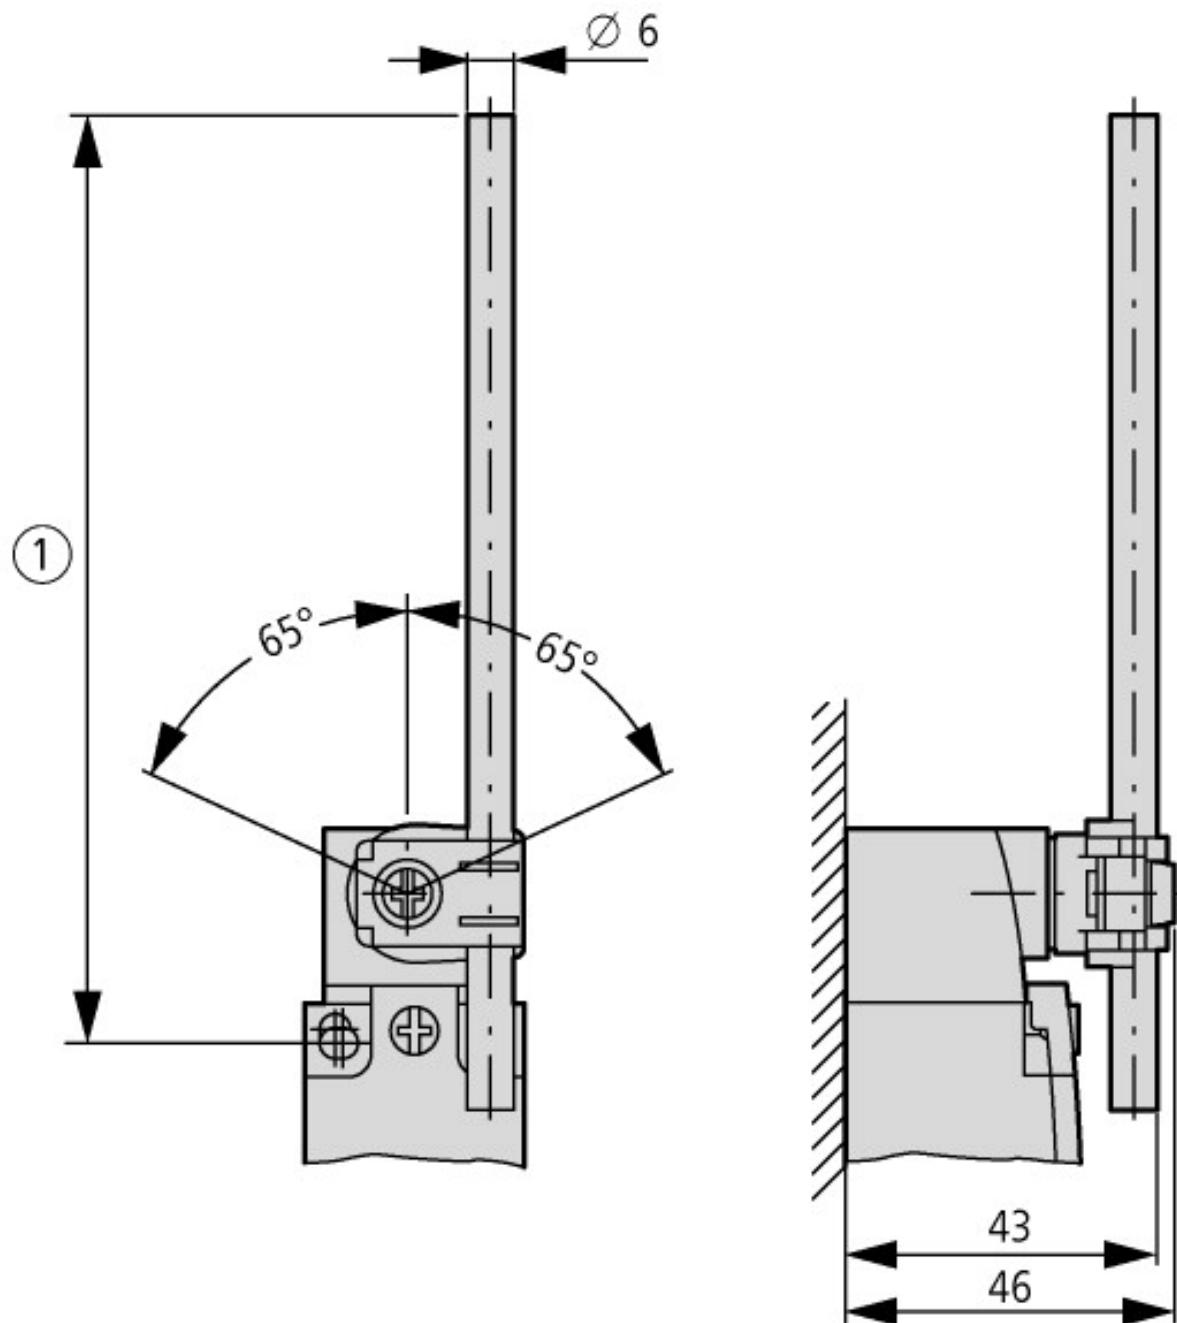

① LS.../RR ≤ 150

LS.../RRM ≤ 210