
Data sheet | Item number: 2009-414

Push-in type wire jumper; 1.5 mm²; insulated; 110 mm long; black

www.wago.com/2009-414



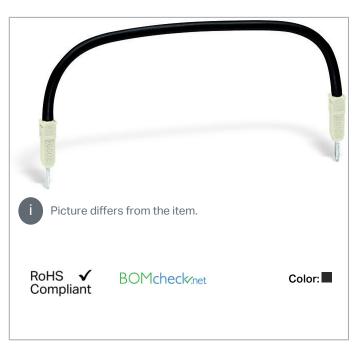

Item description

Safety information 1:

Note: Push down the wire jumper until fully inserted.

Data

Electrical data

Ratings per IEC/EN 60664-1

Nominal voltage (III/3)	800 V
Rated surge voltage (III/3)	8 kV
Rated current	18 A

Mechanical data

Wire length of wire jumpers 110 mm

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

Data sheet | Item number: 2009-414

www.wago.com/2009-414



Material Data

Color	black
Weight	3.1 g

Commercial data

Product Group	2 (Terminal Block Accessories)
Packaging type	BOX
Country of origin	DE
GTIN	4045454302245
Customs tariff number	85444290900

Counterpart

Downloads

Documentation

Bid Text

2009-414 doc - Datei	Apr 28, 2017	doc 24.6 kB	Download
2009-414 GAEB X81 - Datei	Feb 19, 2019	xml 2.8 kB	Download
Additional Information Technical explanations	Apr 3, 2019	pdf 2.1 MB	Download

CAD/CAE-Data

CAE data

WSCAD Universe 2009-414 URL Download

Installation Notes

Commoning

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27 32423 Minden


Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

Data sheet | Item number: 2009-414

www.wago.com/2009-414



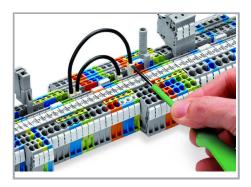

Push down the wire jumper until fully inserted. Lift the jumper with an operating tool for rewiring.

Commoning



Push-in type wire jumpers common terminal blocks over longer distances and across multiple levels.

 $\label{lem:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$