



# CoreLine Waterproof

## WT120C G2 LED60S/840 IA1 L1500

Coreline Waterproof G2 LSC - LED Module, system flux 6000 lm  
- 840 neutral white - Power supply unit

CoreLine waterproof delivers on the CoreLine promise of innovative, easy-to-use and high-quality luminaires. CoreLine waterproof products can directly replace traditional waterproof luminaires with fluorescent lamps ranging from 18W up to 58W. With its slim and stylish design, it continues to keep its well-known and appreciated architecture. Installation is quick and easy, all thanks to its efficient design. CoreLine waterproof provides better wide-beam light distribution for straightforward and effective lighting. Interact Ready luminaires with integrated wireless communications are also available in this range, ready to be used with Interact gateways, sensors and software.

### Product data

General Information			
Lamp family code	LED60S [ LED Module, system flux 6000 lm]	Glow-wire test	Temperature 850 °C, duration 30 s
Light source color	840 neutral white	Flammability mark	For mounting on easily flammable surfaces
Light source replaceable	No	CE mark	CE mark
Number of gear units	1 unit	ENEC mark	ENEC mark
Driver/power unit/transformer	Power supply unit	Warranty period	5 years
Driver included	Yes	Remarks	*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore, the median useful life (B50) value also represents the B10 value.
Optic type	Beam angle 110°	Constant light output	No
Optical cover/lens type	Micro-lens optic	Number of products on MCB of 16 A type B	22
Luminaire light beam spread	105°		
Control interface	InterAct Pro		
Connection	Push-in connector 3-pole		
Cable	-		
Protection class IEC	Safety class I		

## CoreLine Waterproof

EU RoHS compliant	Yes
Service tag	Yes
Product family code	WT130C [ Coreline Waterproof G2 LSC]
Unified glare rating CEN	25

### Operating and Electrical

Input Voltage	220 to 240 V
Input Frequency	50 or 60 Hz
Inrush current	22 A
Inrush time	0.27 ms
Power Factor (Min)	0.9

### Controls and Dimming

Dimmable	Wireless Dim
----------	--------------

### Mechanical and Housing

Housing Material	Polycarbonate
Reflector material	Steel
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Gear tray material	Steel
Fixation material	Stainless steel
Optical cover/lens finish	Frosted
Overall length	1515 mm
Overall width	80 mm
Overall height	76 mm
Color	Gray
Dimensions (Height x Width x Depth)	76 x 80 x 1515 mm (3 x 3.1 x 59.6 in)

### Approval and Application

Ingress protection code	IP65 [ Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [ 5 J vandal-protected]

### Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	6000 lm
-------------------------------------	---------

Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	132 lm/W
Init. Corr. Color Temperature	4000 K
Init. Color Rendering Index	>80
Initial chromaticity	(0.38,0.38)SDCM<=3
Initial input power	45.5 W
Power consumption tolerance	+/-10%

### Over Time Performance (IEC Compliant)


Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance at median useful life* 50000 h	L75

### Application Conditions

Ambient temperature range	-20 to +35 °C
Performance ambient temperature Tq	25 °C
Maximum dim level	10%
Suitable for random switching	Not applicable

### Product Data

Full product code	871869939714200
Order product name	WT120C G2 LED60S/840 IA1 L1500
EAN/UPC - Product	8718699397142
Order code	910505100071
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	910505100071
Net Weight (Piece)	1.820 kg





## Dimensional drawing



CoreLine Waterproof WT120C

## Photometric data

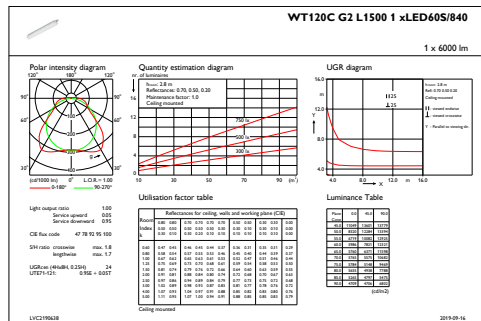

IFGU1\_WT120CG2L15001xLED60S840

OFPC1\_WT120CG2L15001xLED60S840

