

TITAN GYRO® SPOT


220-240V 50/60 Hz LED IP20

EN: MEASUREMENT


SE: MÅTT

NO: MÅL

FI: MITAT

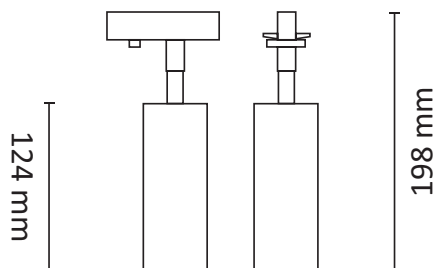

Ø42 mm



TITAN TRACK


OBS!

EN: Installation must be performed by a professional.

NO: Må installeres av autorisert el-installatør.

SE: Måste installeras av en behörig elektriker.

FI: Vain valtuutettu sähköasentaja saa asentaa.




EN: Replaceable light source (LED only)/control gear by a professional.

NO: Utskiftbar lyskilde/kontrollutstyr av autorisert el-installatør.

SE: Utbytbar ljuskälla/kontrollutrustning av auktoriserad elektriker.

FI: Vain valtuutettu sähköasentaja saa vaihtaa valonlähteen/ohjausyksikön.



EN: Minimum distance to flammable material in the beam direction.

NO: Minimumsavstand til brennbart materiale i armaturens stråleretning.

SE: Minsta avstånd mellan brännbart material och lampans ljusrättning.

FI: Vähimmäismitta valaisimesta palaavaan materiaaliin.

EN: This product contains a light source of energy efficiency class F

NO: Dette produktet inneholder en LED-lyskilde med energieffektivitets-klasse F

SE: Denna produkt innehåller en ljuskälla med energieffektivitetsklassen F

FI: Tämä tuote sisältää LED -valonlähteen energiatehokkuus luokalla F


EN: MOUNTING

NO: MONTERING



SE: MONTERING

FI: ASENNUS


1

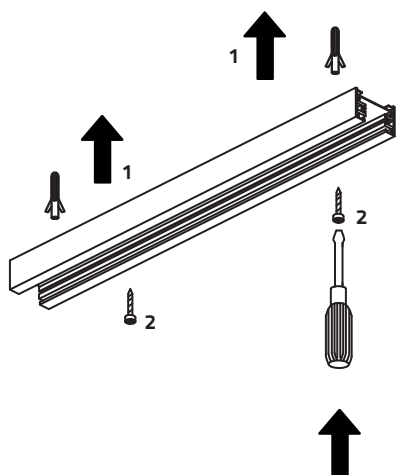

2

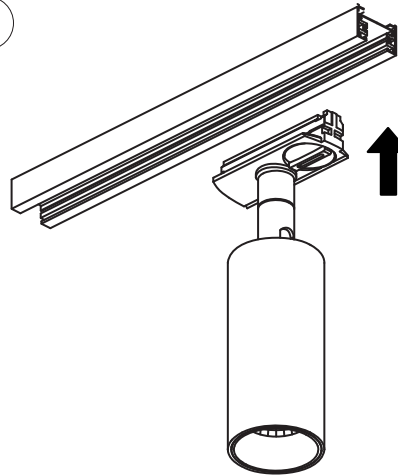

3

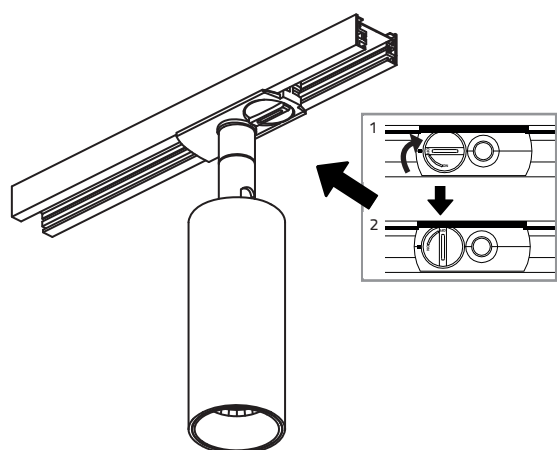

4

