




GYRO® FRAME 1 WARMDIM

220-240V 50/60Hz 300mA LED 9W IP44*

EN: MEASUREMENT

NO: MÅL
SE: MÅTT
FI: MITAT

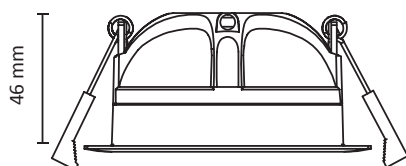

95x95 mm




EN: Installation must be performed by a qualified electrician.
NO: Må installeres av autorisert el-installatør.
SE: Måste installeras av en behörig elinstallatör.
FI: Vain valtuutettu sähköasentaja saa asentaa.

OBS!

EN: CABLE CONNECTION

NO: LEDNINGSTILKOBLING
SE: KABELANSLUTNING
FI: JOHTOLIITÄNTÄ

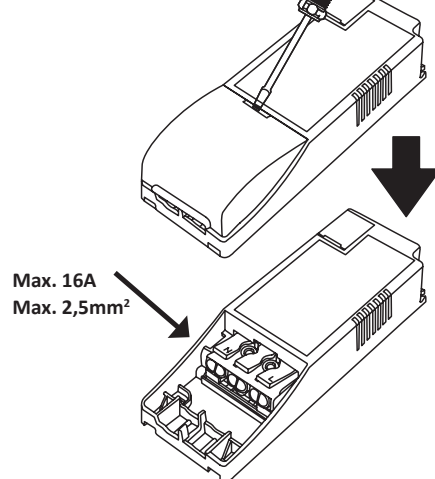






Max. 16A
Max. 2,5mm²

EN: Included dimmable LED driver.
NO: Inkludert dimbar LED driver.
SE: Inklusive dimbar LED drivdon.
FI: Sisältää himmennettävän LED-liitäntälaitteen.

EN: COMPATIBLE PRODUCTS.

NO: KOMPATIBLE PRODUKTER.
SE: KOMPATIBLA PRODUKTER.
FI: YHTEENSOPIVAT TUOTTEET.


UniDim™	KUD-265EV
UniDim™	KUD-500EV-L
UniDim™	KUD-500EV-LS
UniDim™	DUO
UniDim™	MINI
UniDim™	KDT-500IE
WiDim®	WI-FI system
Bluedim®	Bluetooth system
	DOWNLIGHT BOX HIGH
	DOWNLIGHT BOX LOW
	DRIVER PIPE HOUSING

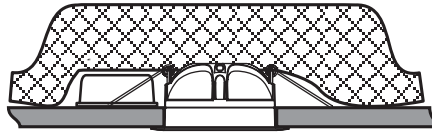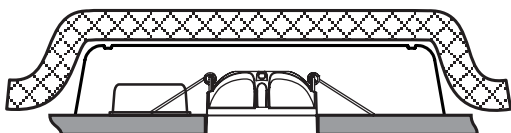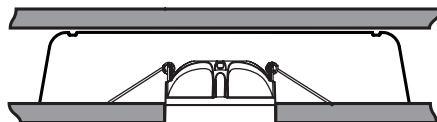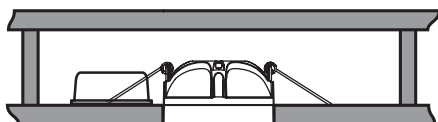


EN: May be covered by insulation sheet.
NO: Kan overdekkes av isolasjonsmatter.
SE: Kan övertäckas av isolationsmattor.
FI: Voi peittää eristysmatolla.



EN: White/black may be used indoors and outdoors.
NO: Hvit/sort kan benyttes innendørs og utendørs.
SE: Vit/Svart kan användas inomhus och utomhus.
FI: Valkoinen/musta sisä- ja ulkokäyttöön.

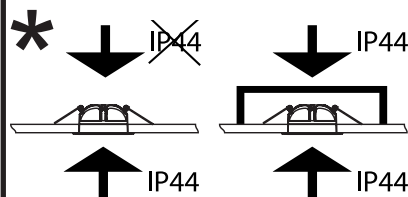

EN: IP44 from the luminaire underside.
NO: IP44 fra armaturens underside.
SE: IP44 från armaturens undersida.
FI: IP44 valaisimen alapuolelta.



EN: Minimum distance to flammable material in the beam direction.
NO: Minimumsavstand til brennbart materiale i armaturens stråleretning.
SE: Minsta avstånd mellan brännbart material och lampans ljusrättning.
FI: Vähimmäisetäisyys valaisimesta herkästi palavaan materiaaliin.