

LED COMPACT 1 LED COMPACT 2



220-240V 50/60Hz LED IP44*

EN: MEASUREMENT

SE: MÅTT

NO: MÅL







FI: MITAT

LED COMPACT 1



Output:	Lumen	Watt	Kelvin
	1200 lm	12W	3000K

LED COMPACT 2

With switchable output:	Lumen	Watt	Kelvin
	1200 lm	12W	3000K
	2300 lm	24W	3000K



Min.
70 mm

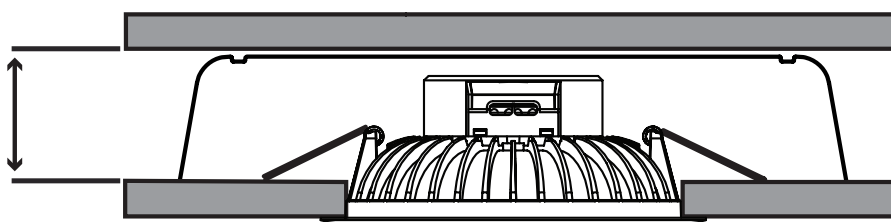

EN: Minimum distance to flammable material in the beam direction.
NO: Minimumsavstand til brennbart materiale i armaturens stråleretning.
SE: Minsta avstånd mellan brännbart material och lampans ljusrättning.
FI: Vähimmäismitta lampusta palaavaan materiaaliin.

OBS!

EN: Installation must be performed by a qualified electrician.
NO: Må installeres av autorisert el-installatør.
SE: Måste installeras av en behörig elinstallatör.
FI: Vain valtuutettu sähköasentaja saa asentaa.

EN: CORRESPONDING PRODUCT.

NO: TILHØRENDE PRODUKT.


SE: TILLHÖRANDE PRODUKT.

FI: AIHEESEEN LIITTYVÄ TUOTE.

UniDim™	KUD-265EV
UniDim™	KUD-500EV-L
UniDim™	KUD-500EV-LS
UniDim™	DUO
UniDim™	MINI
UniDim™	KDT-500IE
WiDim®	WI-FI system
Bluedim®	Bluetooth system

	DOWNLIGHT BOX HIGH
	DRIVER PIPE HOUSING

EN: The luminaire is complete with cable/connector.
NO: Armaturet leveres komplett med ledning/plugg.
SE: Armaturerna levereras komplett med kabel/kontakt.
FI: Valaisimet toimitetaan liitosjohdolla/pistokkeella.

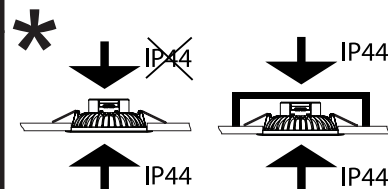

EN: IP44 from the luminaire underside.
NO: IP44 fra armaturens underside.
SE: IP44 från armaturens undersida.
FI: IP44 valaisimen alapuolelta.