

# POWERCONE™


85-265V 50Hz LED IP66

## EN: MEASUREMENT

### NO: MÅL

### SE: MÅTT

### FI: MITAT






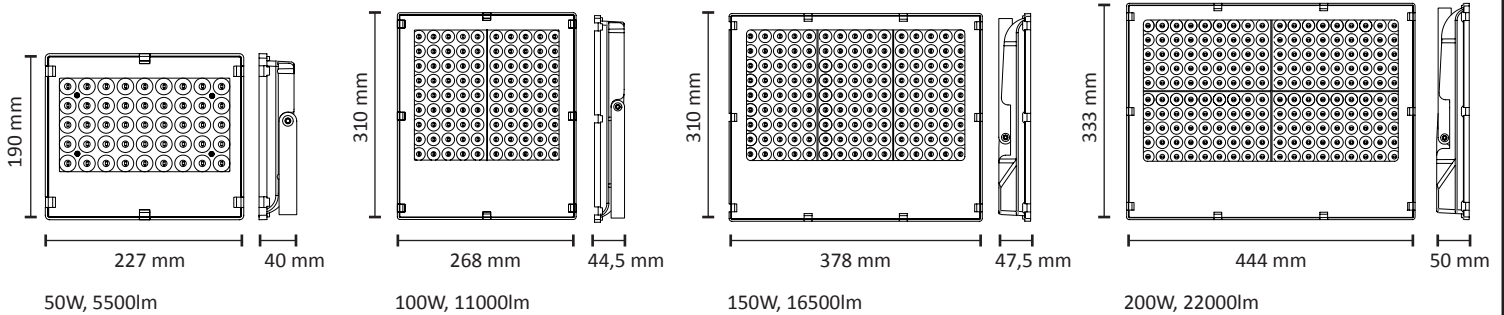


## EN: MOUNTING

### NO: MONTERING

### SE: MONTERING

### FI: ASENNUS

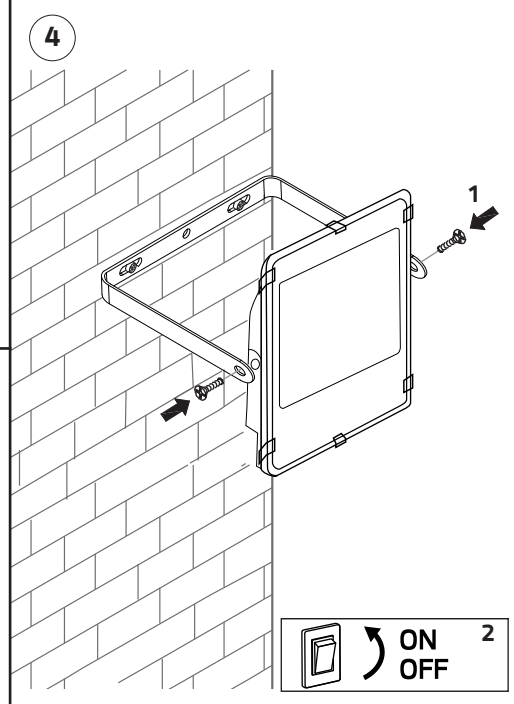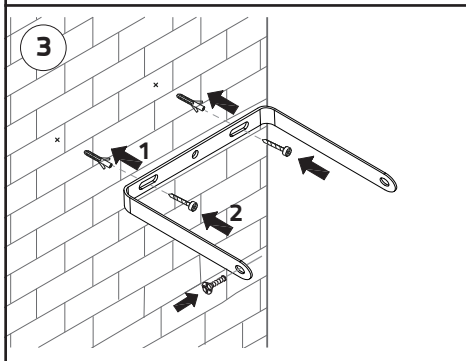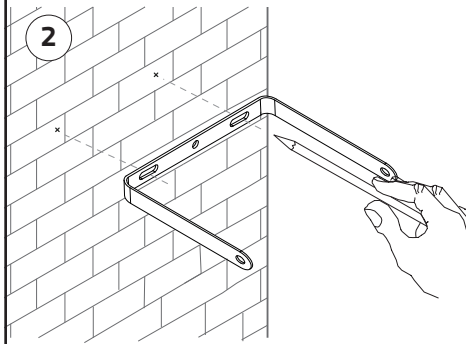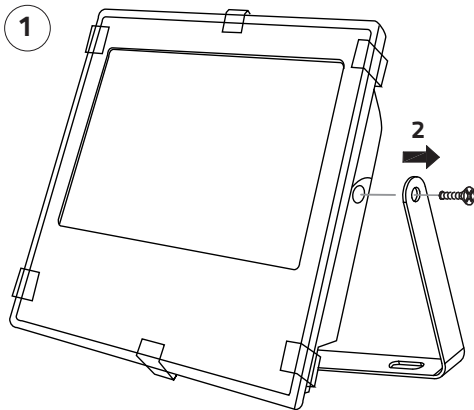

## EN: TECHNICAL SPECIFICATIONS

- 85-265V
- Class I - must be earthed
- IP66 (Plug IP44)
- Colour Temperature: 4000K
- Beam Angle: 90° CRI:80
- LED Type: Philips 3030
- Temp: -20° - +40°C
- Mounting Hole CC:  
50W: 100-130 mm  
100W: 130-160 mm  
150W: 180-200 mm  
200W: 220-270 mm
- Non replaceable lamp

## NO: TEKNISKE SPESIFIKASJONER

- 85-265V
- Klasse 1 - må jordes
- IP66 (Plugg IP44)
- Fargetemperatur: 4000K
- Strålevinkel: 90° CRI:80
- LED Type: Philips 3030
- Temp: -20° - +40°C
- Monteringshull CC:  
50W: 100-130 mm  
100W: 130-160 mm  
150W: 180-200 mm  
200W: 220-270 mm
- Ikke utskiftbar lampe

## SE: TEKNISKA SPECIFIKASJONER

- 85-265V
- Klass I - måste jordas
- IP66 (Plug IP44)
- Färgtemperatur: 4000K
- Strålevinkel: 90° CRI:80
- LED Typ: Philips 3030
- Temp: -20° - +40°C
- Monteringshål CC:  
50W: 100-130 mm  
100W: 130-160 mm  
150W: 180-200 mm  
200W: 220-270 mm
- Ej utbytbar lampa

## FI: TEKNISET TIEDOT

- 85-265V
- Luokka I - pitää maadoittaa
- IP66 (Pistotulppa IP44)
- Väriämpötila: 4000K
- Valokeilan kulma: 90° CRI:80
- LED-tyyppi: Philips 3030
- Lämpötila: -20° - +40°C
- Kiinnitysreiän CC:  
50W: 100-130 mm  
100W: 130-160 mm  
150W: 10-200 mm  
200W: 220-270 mm
- Ei vaihdettava lamppu