

## plug - with screwless terminals




| Product description       |                                                |
|---------------------------|------------------------------------------------|
| BALS-Prd.-Nr              | 2141                                           |
| EAN                       | 4024941021418                                  |
| Product group             | Quick-Connect plug with Multi-Grip cable gland |
| Current                   | 32A                                            |
| Number of poles           | 4p                                             |
| Arrangement of the phases | 3P+PE                                          |
| Earth 'clock' position    | 9 h                                            |
| Voltage                   | 200 up to 250V                                 |
| Frequency                 | 50 and 60Hz                                    |

| Product description    |                                                                  |
|------------------------|------------------------------------------------------------------|
| Protection degree      | IP44                                                             |
| Colour code            | blue                                                             |
| Colour of appliance    | Collar blue, Housing cover grey, Cable gland grey                |
| Connection design      | screwless spring-clamp technology as cage clamp                  |
| Maximum conductor size | 6,0 qmm                                                          |
| Cable entry            | Cable gland                                                      |
| Height                 | 176mm                                                            |
| Width                  | 79mm                                                             |
| Depth                  | 83mm                                                             |
| Material of enclosure  | Polyamide                                                        |
| Contacts               | The contact carrier is made of polyamide, The contacts are brass |

| Additional technical information |                                                                                                                                                                  |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                  | Multi-Grip cable gland with gasket and integrated strain relief, Screwless housing connection with snap fastening, For cable diameter from 11 up to max. 23,5 mm |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.243 kg / piece |
| Packaging      | bag              |
| Content amount | 1 ST             |
| EAN            | 4024941021418    |

| Logistics data |               |
|----------------|---------------|
| Length         | 83 mm         |
| Width          | 79 mm         |
| Height         | 176 mm        |
| Weight         | 0.244 kg      |
| Volume         | 1,154.032 ccm |
| Packaging      | carton        |
| Content amount | 10 ST         |
| EAN            | 4024941967662 |
| Length         | 295 mm        |
| Width          | 185 mm        |
| Height         | 215 mm        |
| Weight         | 2.594 kg      |
| Volume         | 9,975 ccm     |

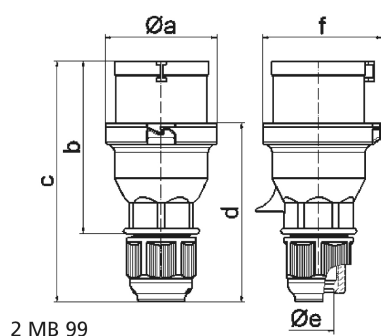

| Ampere         | 16    | 16    | 16    | 32    | 32    | 32    |
|----------------|-------|-------|-------|-------|-------|-------|
| Polzahl        | 3     | 4     | 5     | 3     | 4     | 5     |
| a ø            | 53,0  | 60,0  | 66,0  | 74,5  | 74,5  | 74,5  |
| b              | 93,5  | 100,5 | 103,0 | 121,0 | 121,0 | 121,5 |
| c              | 134,0 | 141,0 | 142,0 | 174,0 | 174,0 | 174,5 |
| d              | 97,5  | 104,5 | 105,5 | 128,0 | 128,0 | 128,5 |
| e ø            | 18,0  | 18,0  | 18,0  | 23,0  | 23,0  | 23,0  |
| f              | 57,5  | 64,5  | 70,5  | 78,0  | 78,0  | 80,0  |
| Leiter mm² min | 1     | 1     | 1     | 2,5   | 2,5   | 2,5   |
| Leiter mm² max | 2,5   | 2,5   | 2,5   | 6     | 6     | 6     |
|                |       |       |       |       |       |       |
|                |       |       |       |       |       |       |
|                |       |       |       |       |       |       |