

MC4-Evo 2 In-line Fuse MC4-Evo 2 Y-Splitter

Solarline | Solutions for renewable energy

EN



DC INTERCONNECTION SOLUTIONS


Best-in-class eBoS components for your PV system

Our DC cabling system offers first-class quality and outstanding functionalities.


The unique manufacturing process through vulcanization ensures permanent highest

protection against ingress and will provide best-in-class performance even under harsh climatic conditions.

Worldwide unique vulcanization process

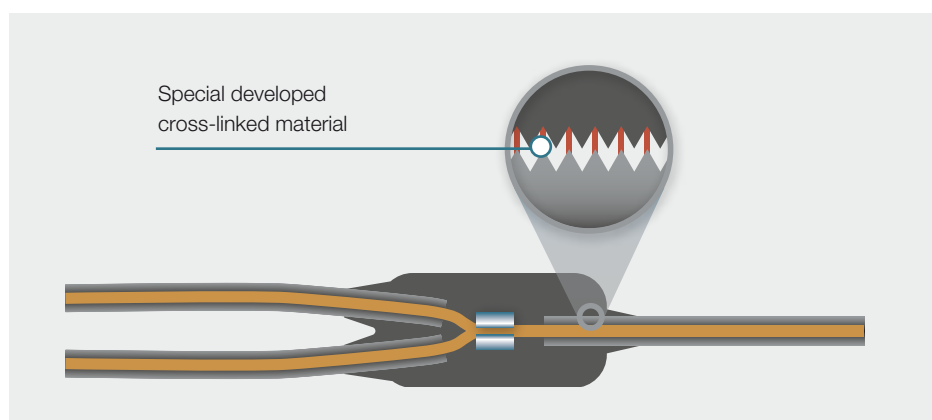

Less material use and short assembly time

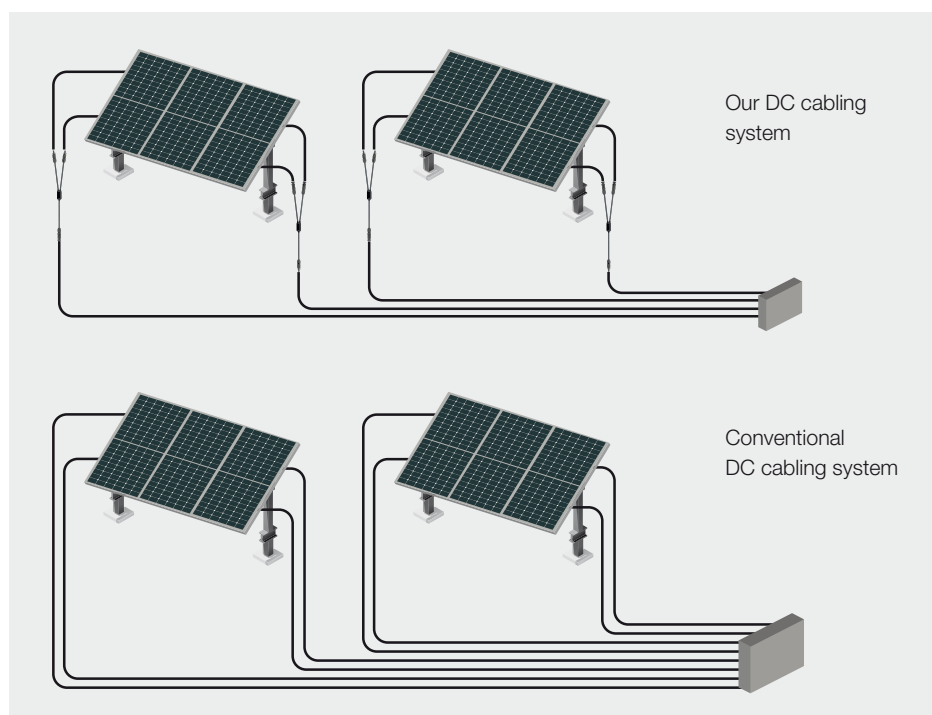

Product features and your benefits

Product features and advantages

Customer benefits

Enclosure concept and design (Vulcanization Process)

Best-in-class **product reliability**

- Product lifetime expectancy
- Insulation performance
- Harsh environment compliant



Certified product safety

Product trust in **safety and reliability**

- Meeting relevant industry standards (2PfG 1911, 2PfG 2380)
- Verified by independent third party



Track record

Proven long-term reliability

- Installed base (>4 GW)
- Systems operating in harsh environment and conditions



Original MC4-Evo 2 connectors

Best-in-class **connector technology**

- More reliable and durable operation
- Less downtimes and performance losses



Solution features and advantages

Customer benefits

Lower total cost of ownership

Cost savings compared to conventional DC cabling design

- Less material and components used (optimized CAPEX)
- Insensitivity due to fewer components and maintenance (optimized OPEX)



Plug and play

Time and cost savings compared to field assembly

- Ready-to-use product design with connector assembly
- Reducing potential failure risks due to incorrect installation



Stäubli Excellence

Well acknowledged **Stäubli quality**

- Trustworthy product and solution source
- Controlled supply chain with state-of-the-art quality components



Engineered in Europe and sustainable manufactured

Meeting state-of-the-art ESG requirements


- Highest **product quality**
- Sustainable supply chain and **low carbon footprint**




Y-SPLITTER

MC4-Evo 2 Y-Splitter (PV-K/SPL-Y)

PV-K/SPL-Y...ES...

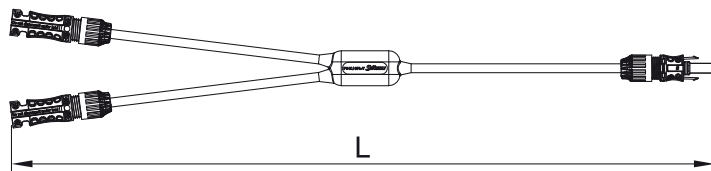

PV-K/SPL-Y...EP...

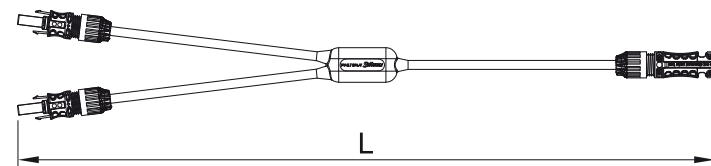

Technical data

Connector system	MC4-Evo 2
Voltage rating	DC 1500 V
Test voltage	8 kV
Safety class	II
Overvoltage category Pollution degree	CATIII/3
Mating connectors, only genuine Stäubli connectors shall be used!	Original MC4 cable coupler and panel receptacle Original MC4-Evo 2 cable coupler and panel receptacle
Ambient temperature range	-40 °C ... +85 °C
Transportation/storage temperature range	-30 °C ... +60 °C
Transportation/storage relative humidity	< 70 %
Degree of Protection (IP), mated unmated	IP65/IP68 (1 m, 1 h) IP2X
Insulation material	PA, EVA, XLPE
Contact material	Copper, tin plated
Max. contact resistance of the connector	< 0,25 mΩ
Certified according to TÜV Rheinland 2PfG 1913	pending

The MC4-Evo 2 Y-Splitter is TÜV Rheinland certified and guarantees a long-lasting, stable connection within a PV DC string: Minimal energy loss, low heat generation. Ro-

bust housing, safety class IP68 (1 m, 1 h).
Cable cross-section 6 mm².

Order No.	Type	TÜV Rheinland (2PFG 1913)		Lead length L (cm)	Connector system	Input Connector	Output Connector	Approvals
		DC V	A					
32.0333	PV-K/SPL-Y-6-15/15-15EPP/ES-0050	1500	53	50	MC4-Evo 2	Plug (2 x)	Socket (1 x)	x
32.0334	PV-K/SPL-Y-6-15/15-15ESS/EP-0050	1500	53	50	MC4-Evo 2	Socket (2 x)	Plug (1 x)	x



Assembly instructions MA706

www.staubli.com/electrical

IN-LINE FUSE

MC4-Evo 2 In-line Fuse (PV-K/ILF3)

PV-K/ILF3...



Technical data	
Connector system	MC4-Evo 2
Voltage rating	DC 1500 V
Test voltage	8 kV
Safety class	II
Overvoltage category Pollution degree	CATIII/3
Mating connectors, only genuine Stäubli connectors shall be used!	Original MC4 cable coupler and panel receptacle Original MC4-Evo 2 cable coupler and panel receptacle
Rated current gPV	4 A 5 A 6 A 15 A 20 A
Ambient temperature range	-40 °C ... +50 °C
Transportation/storage temperature range	-40 °C ... +50 °C
Transportation/storage relative humidity	< 70 %
Degree of Protection (IP), mated unmated	IP65/IP68 (1 m, 1 h) IP2X
Insulation material	PA, EVA, XLPE
Contact material	Copper, tin plated
Max. contact resistance of the connector	< 0,25 mΩ
Certified according to TÜV Rheinland 2PFG 2380	pending

The MC4-Evo 2 In-line Fuse (PV-K/ILF3) with a crimping connection guarantees a long-lasting, stable connection in comparison to conventional omega-style clips: Minimal energy loss, low heat generation. Ro-

bust housing, safety class IP68 (1 m, 1 h).
Cable cross-section 6 mm².

Order No.	Type	TÜV Rheinland (2PfG 2380)		Lead length L (cm)	Connector system	Approvals TÜV
		DC V	A			
32.0326	PV-K/1500ILF3-4/6E-0059	1500	4	59	MC4-Evo 2	×
32.0327	PV-K/1500ILF3-5/6E-0059	1500	5	59	MC4-Evo 2	×
32.0328	PV-K/1500ILF3-6/6E-0059	1500	6	59	MC4-Evo 2	×
32.0329	PV-K/1500ILF3-15/6E-0059	1500	15	59	MC4-Evo 2	×
32.0330	PV-K/1500ILF3-20/6E-0059	1500	20	59	MC4-Evo 2	×



Assembly instructions MA707

www.staubli.com/electrical

Customer and application specific cable assemblies

MC4-Evo 2 In-line Fuse (PV-K/ILF3) according to your request

Connector 1

☐ PV-KBT4-EVO 2 (female)


☐ PV-KST4-EVO 2 (male)


MC4-Evo 2 cable coupler

Connector 2

☐ PV-KBT4-EVO 2 (female)



☐ PV-KST4-EVO 2 (male)


MC4-Evo2 cable coupler


Connector 1



Cable



Fuse



Connector 2



Fuse

Fuse size

☐ 4 A
 ☐ 5 A
 ☐ 6 A

☐ 15 A
 ☐ 20 A


Cable, 6 mm²

Overall length of In-line Fuse
(min 59 cm)

cm

Please send your request to:
ebos.solutions@staubli.com

MC4-Evo 2 Y-Splitter (SPL-Y) according to your request

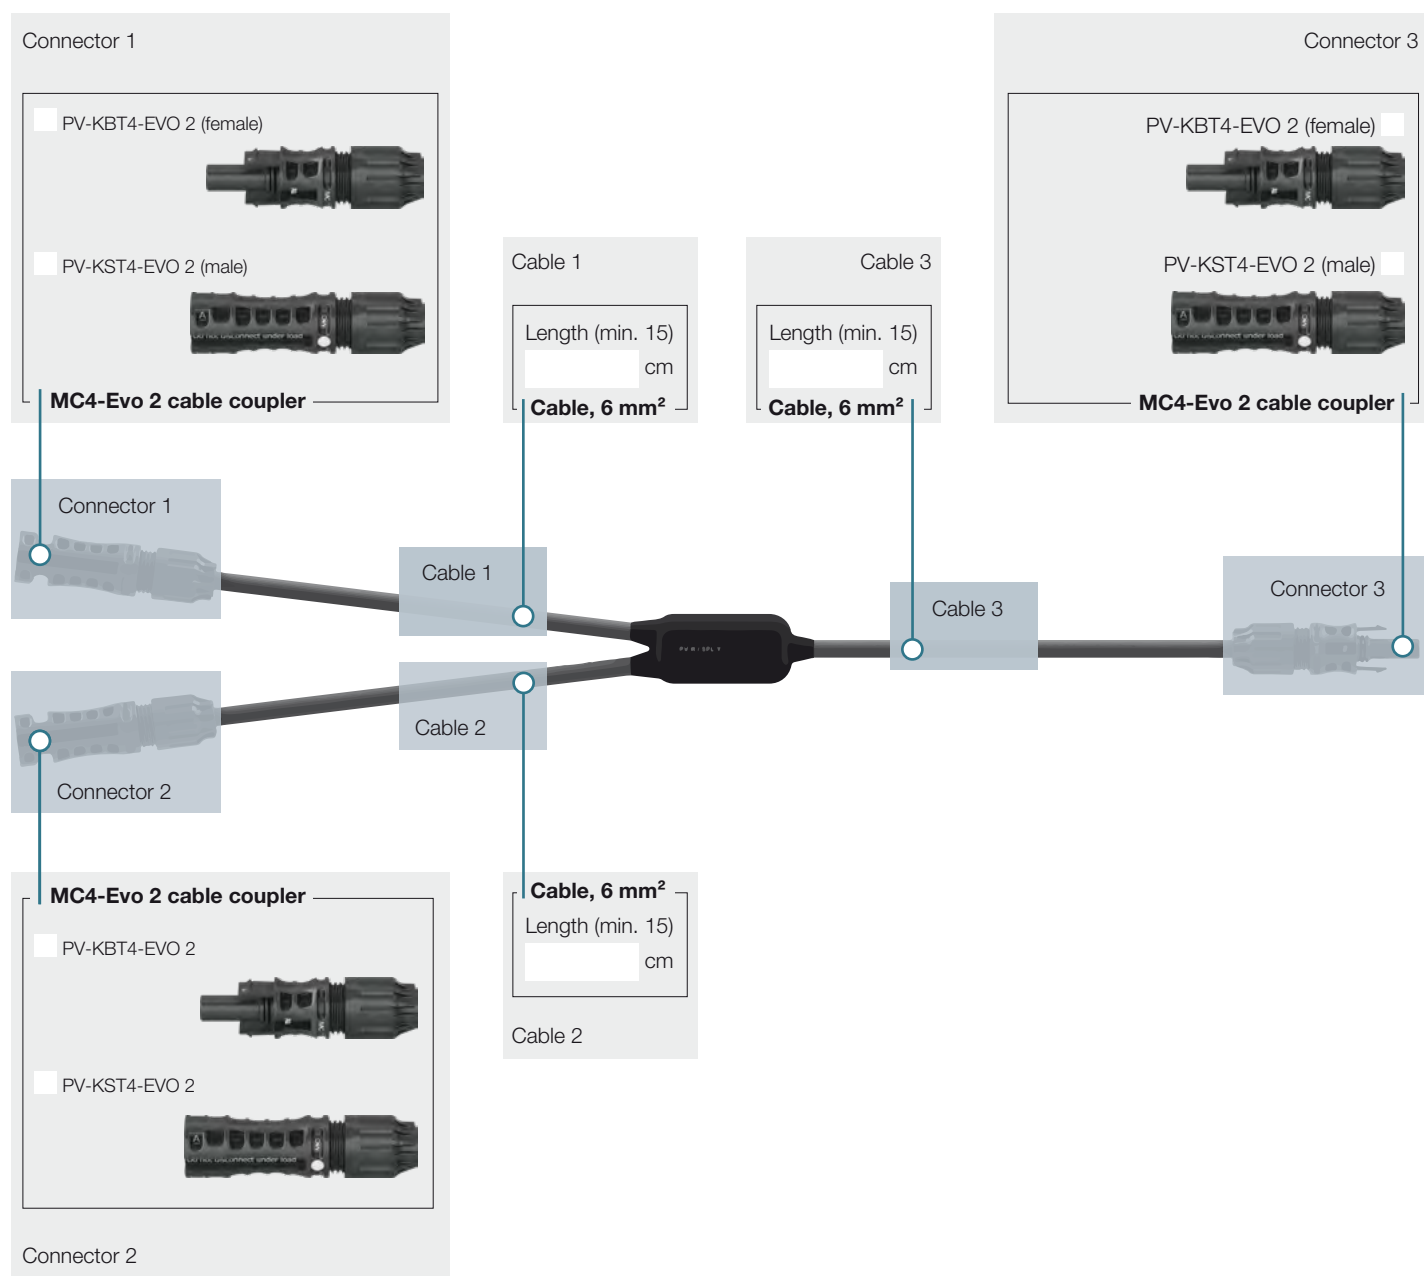

Cable lead according to your request

Connector 1

MC4 cable coupler

☐ PV-KBT4 (female)



☐ PV-KST4 (male)



MC4 panel receptacle

☐ PV-ADBP4-S2 (female)



☐ PV-ADSP4-S2 (male)



MC4-Evo 2 cable coupler

☐ PV-KBT4-EVO 2 (female)



☐ PV-KST4-EVO 2 (male)



MC4-Evo 2 panel receptacle

☐ PV-ADB4-EVO 2 (female)



☐ PV-ADS4-EVO 2 (male)



Cable

Cross section (mm²)

☐ 2.5 ☐ 4 ☐ 6 ☐ 10

Overall length of cable lead

cm

Connector 2

MC4 cable coupler

☐ PV-KBT4 (female)



☐ PV-KST4 (male)



MC4 panel receptacle

☐ PV-ADBP4-S2 (female)



☐ PV-ADSP4-S2 (male)



MC4-Evo 2 cable coupler

☐ PV-KBT4-EVO 2 (female)



☐ PV-KST4-EVO 2 (male)



MC4-Evo 2 panel receptacle

☐ PV-ADB4-EVO 2 (female)



☐ PV-ADS4-EVO 2 (male)





Connector 1



Cable



Connector 2

Please send your request to:
ebos.solutions@staubli.com



● Stäubli Units ○ Representatives/Agents

Global presence of the Stäubli Group

www.staubli.com