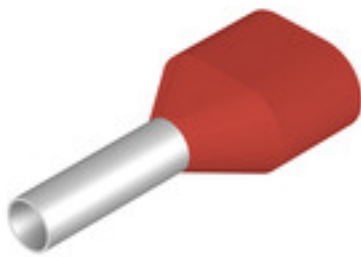


**H1,5/16 ZH R SV****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

- in multi-pack bag (5 x 100 pcs.)
- Weidmüller colour code
- DIN colour code

**General ordering data**

|            |                                                           |
|------------|-----------------------------------------------------------|
| Version    | Wire-end ferrule, Twin wire-end ferrule, 11 mm, 8 mm, red |
| Order No.  | <a href="#">9004410000</a>                                |
| Type       | H1,5/16 ZH R SV                                           |
| GTIN (EAN) | 4008190009397                                             |
| Qty.       | 500 pc(s).                                                |
| Packaging  | Multipack bag                                             |

## H1,5/16 ZH R SV

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |         |
|------------|---------|
| Net weight | 0.172 g |
|------------|---------|

## Technical data

|                        |                            |         |                       |
|------------------------|----------------------------|---------|-----------------------|
| Description of article | Twin wire end ferrule, red | Version | Twin wire-end ferrule |
|------------------------|----------------------------|---------|-----------------------|

## Wire-end ferrules

|                                         |            |                             |         |
|-----------------------------------------|------------|-----------------------------|---------|
| Collar height (A)                       | 6.5 mm     | Collar width (B)            | 3.6 mm  |
| Colour code                             | Weidmüller | Conductor cross-section     | 1.5 Nm  |
| Contact surface diameter (D1)           | 2.2 mm     | Contact surface length (L2) | 8 mm    |
| L1 in mm                                | 16 mm      | Metal sleeve thickness (S1) | 0.15 mm |
| Plastic collar thickness (S2)           | 0.3 mm     | Stripping length            | 11 mm   |
| Wire connection cross section AWG, max. | AWG 16     |                             |         |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC000005    | ETIM 7.0    | EC000005    |
| ETIM 8.0    | EC000005    | ECLASS 9.0  | 27-40-02-01 |
| ECLASS 9.1  | 27-40-02-01 | ECLASS 10.0 | 27-40-02-01 |
| ECLASS 11.0 | 27-40-02-01 |             |             |

## Approvals

Approvals



|                       |         |
|-----------------------|---------|
| ROHS                  | Conform |
| UL File Number Search | E499744 |

## Downloads

|                    |                                                                                          |
|--------------------|------------------------------------------------------------------------------------------|
| Engineering Data   | <a href="#">STEP</a>                                                                     |
| Engineering Data   | <a href="#">EPLAN, WSCAD, Zuken E3.S</a>                                                 |
| User Documentation | <a href="#">Technical information - EN</a><br><a href="#">Technical information - DE</a> |
| Catalogues         | <a href="#">Catalogues in PDF-format</a>                                                 |
| Brochures          |                                                                                          |

**H1,5/16 ZH R SV****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Drawings****Drawing**