


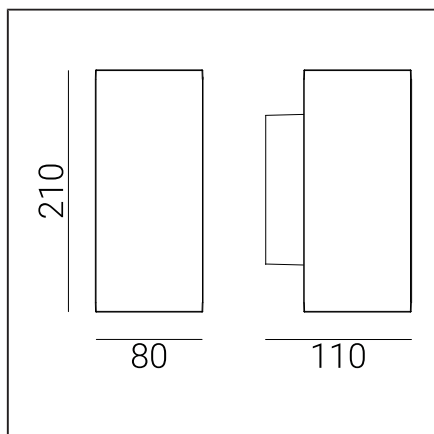

Art.nr	El.nummer	Farge	RAL
1731AL	3101991	ALUMINIUM	9006
1731GR	3101992	GRAFITT	7016
1731W	3101996	HVIT	9003
1731B	3104131	SORT	9005

Generell informasjon

Type armatur	Veggarmatur
Materiale	Pulver lakkert aluminiumstøp
Avdeknings materiale/optikk	Glass - herdet, klar
Type lyskilde	GU10 LED, 25D inkl.
Lysstyring	Dimbar (Triac)
Netto / Brutto vekt armatur	1,53kg / 1,63kg
Effekt W	2 x 3,9W
Armatureffekt	7,8W
Modul lumen	530lm
Lumen ut	420lm
Modul effektivitet	67,9lm/W
Armatur Lumen/Watt	53,8lm/W
Fargetemperatur	2700K
Farvekonsistens (McAdam-Ellipse)	SDCM3
Fargegjengivelsesindeks	90
Beregnet levetid L70/B50 ved 25°C	40 000h
Energieffektivitetsindeks (EEL)	 /  EPREL
Virkningsgrad	PF >0,8
Ta nominel:	+25°C

Filer som kan lastes ned

Photometric LDT files, Photometric IES files, Manual

