

|                           |                                  |                                                                                     |
|---------------------------|----------------------------------|-------------------------------------------------------------------------------------|
|                           | <b>DATA SHEET</b>                |  |
| Valid from:<br>07.12.2018 | <b>FLEXIMARK® Cablelabel LFL</b> |                                                                                     |

Cable label for cable marking. Mounting with cable tie. Delivered on perforated sheets designed for laser printing. UV-resistant.



#### Technical data:

|                        |                                       |
|------------------------|---------------------------------------|
| Material:              | Polyester, halogen free, UV-resistant |
| Operating temperature: | -40°C to +125°C                       |
| Sheet size:            | A5, A4                                |
| Colour:                | Yellow/White                          |
| Recommended storage:   | 21°C and 50% RH                       |

#### Mounting:

One or two cable ties.

#### Other product data:

ETIM Classification: EC001288

#### Advantages:

Supplied as punched and perforated A5 and A4 sheets.  
Printed in standard office laser printers, both sides are printable.  
The label has pre punched holes for one or two cable ties.

|                       |                                       |             |
|-----------------------|---------------------------------------|-------------|
| Creator: Fleximark/LR | Document: DB83254750EN<br>Version: 00 | Page 1 of 3 |
|-----------------------|---------------------------------------|-------------|

|                           |                           |                                                                                     |
|---------------------------|---------------------------|-------------------------------------------------------------------------------------|
|                           | DATA SHEET                |  |
| Valid from:<br>07.12.2018 | FLEXIMARK® Cablelabel LFL |                                                                                     |

#### Product data:

| E-nr.   | LAPP<br>Part no. | Article designation        | Size/ Label<br>WxH mm | Content/<br>unit | colour | Content<br>(Unit) | PU |
|---------|------------------|----------------------------|-----------------------|------------------|--------|-------------------|----|
| 2972058 | 83254750         | LFL 2H 9.9x26 YE/WH        | 9.9x26                | 40               | Yellow | 10                | 1  |
| 2972059 | 83254760         | LFL 1H 9.9x35 YE/WH        | 9,9x35                | 40               | Yellow | 10                | 1  |
| 2972097 | 83254765         | Cablelabel 9.9-66 YE/WH A4 | 9,9-66                | 56               | Yellow | 10                | 1  |

#### Resistance of FLEXIMARK® Cablelabel LFL:

RICE test SP-2171


|                       | Resistance test         |                         | Chemical resistance test with abrasion |                                                  |                                           |                         |                         |                                   |                             |
|-----------------------|-------------------------|-------------------------|----------------------------------------|--------------------------------------------------|-------------------------------------------|-------------------------|-------------------------|-----------------------------------|-----------------------------|
|                       | UV                      | Ageing                  | Diesel                                 | Acid<br>(H <sub>2</sub> SO <sub>4</sub> )<br>25% | Alkali<br>(Detergent<br>solution,<br>10%) | Distilled<br>water      | Salt water<br>(5% NaCl) | Transformer<br>oil (Nytro<br>10X) | Ethanol                     |
| <b>FLEXIMARK®</b>     |                         |                         |                                        |                                                  |                                           |                         |                         |                                   |                             |
| <b>Cablelabel LFL</b> | Tested &<br>Recommended | Tested &<br>Recommended | Tested & not<br>recommended            | Tested & not<br>recommended                      | Tested &<br>recommended                   | Tested &<br>recommended | Tested &<br>recommended | Tested &<br>recommended           | Tested & not<br>recommended |

|                       |                                       |             |
|-----------------------|---------------------------------------|-------------|
| Creator: Fleximark/LR | Document: DB83254750EN<br>Version: 00 | Page 2 of 3 |
|-----------------------|---------------------------------------|-------------|


|                           |                                  |                                                                                     |
|---------------------------|----------------------------------|-------------------------------------------------------------------------------------|
|                           | <b>DATA SHEET</b>                |  |
| Valid from:<br>07.12.2018 | <b>FLEXIMARK® Cablelabel LFL</b> |                                                                                     |

## Related products

FLEXIMARK® Cablelabel LFL can be printed using FLEXIMARK® Software and an office laser printer. Select label in the label selector in the program, add to the table what to print, select printer and print.

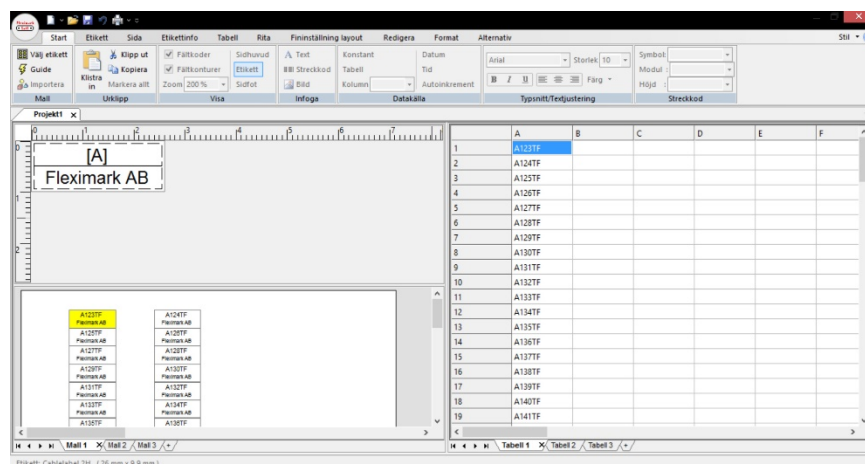

Easily mounted with plastic cable ties (available in our range).

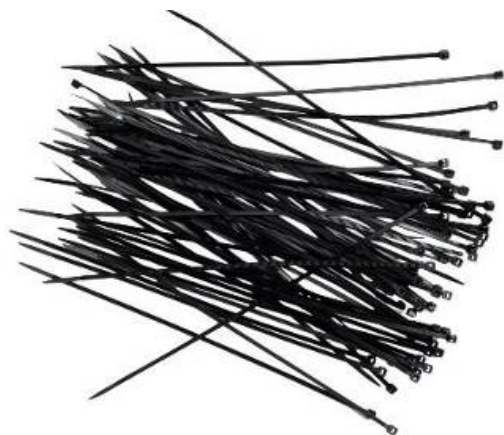

### Note:

Pictures are not to scale and do not represent detailed images of each product.

|                       |                                       |             |
|-----------------------|---------------------------------------|-------------|
| Creator: Fleximark/LR | Document: DB83254750EN<br>Version: 00 | Page 3 of 3 |
|-----------------------|---------------------------------------|-------------|