



IDEAL NETWORKS



NavITEK NT

Copper and Fibre Network Troubleshooter

Proof of Performance

NaviTEK NT

Network Troubleshooter

The NaviTEK NT is a network tester for troubleshooting and maintenance of active and passive copper and fibre networks. Incorporating an improved graphical interface NaviTEK NT allows network technicians to pinpoint and solve network connectivity issues faster than ever before. Subsequently, tests can be saved as pdf reports and shared with colleagues and clients using the free IDEAL AnyWare™ app.




Addressing the needs of today's network technicians

Today, network technicians have a broad selection of software troubleshooting tools at their disposal and whilst useful in certain situations and environments they do have limitations. NaviTEK NT on the other hand offers a comprehensive suite of test and troubleshooting functionality only found on dedicated hand-held testers:-


- Copper and fibre test interfaces
- Fast detection of link and IP information including duplex, speed, port ID, VLAN, DNS, DHCP, Gateway status and IP address
- Detects services such as ISDN, POTS and PoE
- Accurate wire mapping including length measurement and distance to fault
- Rugged, compact design permits use in confined spaces
- Not susceptible to virus and malware attack

Port & network summary info




Press the Autotest button to display summary information and allow for detailed inspection of network parameters.

VLAN detection & operation




Automatic detection of VLAN ID's allows the user to configure NaviTEK NT for operation on a VLAN.

Ethernet utilisation




Real time display of broadcast network traffic shown as a percentage of port speed for the previous 60 minutes.

CDP/LLDP/EDP port information




Show port information using Cisco Discovery Protocol (CDP), Link Layer Discovery Protocol (LLDP) and Extreme Discovery Protocol (EDP).

Netscan



Display list of IP and MAC addresses of every device connected to the network.

Network Probe



View network illustration to verify test results of each network component.

Send test reports from anywhere using the free app



IDEAL
AnyWARE



Step 1

Test


- Create job folder
- Enter job site information
- Perform autotest on copper/fibre cabling and copper/fibre networks



Step 2

Connect

- Activate NaviTEK NT wireless hotspot
- Connect your mobile phone or tablet with the IDEAL AnyWARE App
- Transfer test reports to your mobile device
- View test reports

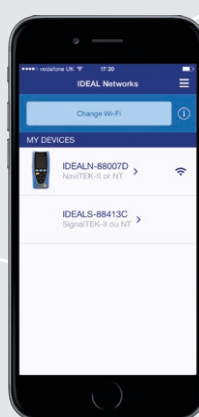

Step 3

Send

- Select reports (PDF or CSV) to send
- Select preferred transfer method – email, ftp, cloud storage etc.
- Send file
- Alternatively save test reports to USB key

Download the FREE App today



NaviTEK NT

Performs tests for copper cabling and networks, including:

- Display network configuration - IPv4 / IPv6 compatible
- Advanced wiremap for miswires, split pairs, opens and shorts
- Distance to opens and shorts (TDR)
- PoE/PoE+ detection
- Tone generator for cable tracing
- Ping and Traceroute testing
- Hub blink for port identification
- DHCP client
- Switch detection - 10/100/1000 Mb/s
- User-exchangeable RJ45 inserts
- Support for up to 12 wiremap remotes
- Backlit colour screen

NaviTEK NT Plus

All the features of NaviTEK NT as well as:

- Autotest button performs a suite of network tests
- Network Probe provides detailed port and network information of each device
- Port identification using EDP/CDP/LLDP protocols
- VLAN detection and support
- Network scan
- Traffic utilisation bar graph
- Internal memory for 5000 test reports
- Generate test reports (PDF or CSV)
- Sent test reports from your mobile device using the free IDEAL AnyWARE App

NaviTEK NT Pro

All of the features of NaviTEK NT Plus as well as:

- Fibre optic cable interface
- Logon using the 802.1x protocol
- Optical interface with power indication

NaviTEK NT

Network Troubleshooter

Test Reporting

NaviTEK NT automatically generates test reports in PDF or CSV format.

The summary page of each report can be customised to include logo, company and operator details. Choose between 3 different reports that can show either passed, failed or all test reports in each report:

- Summary
- Brief
- Full (see example on the right side)

Ordering Information

Part No.	Kit Contents
R153001	NaviTEK NT – Network Troubleshooter. 1 x NaviTEK NT test unit, 1 x Remote unit No. 1, 4 x AA dry cell batteries (non-rechargeable), 2 x Patch cables - 30cm, Cat. 5e STP, 1 x Quick reference guide, 1 x Carry case
R151003	NaviTEK NT Plus– Network Troubleshooter. 1 x NaviTEK NT Plus test unit, 1 x Remote unit No. 1, 1 x Rechargeable Power Module, 1 x PSU EU/UK/US adaptors, 2 x Patch cables - 30cm, Cat. 5e STP, 1 x USB Wi-Fi adapter, 1 x Quick reference guide, 1 x Carry case
R151004	NaviTEK NT Pro – Network Troubleshooter. 1 x NaviTEK NT Pro test unit, 1 x Remote unit No. 1, 1 x Rechargeable Power Module, 1 x PSU EU/UK/US adaptors, 2 x Patch cables - 30cm, Cat. 5e STP, 1 x USB Wi-Fi adapter, 1 x Quick reference guide, 1 x Carry case





NaviTEK-NT Test Report

Job Name: Building_5
Date Tested: October 21 2015
Time Tested: 17:00
Info 1: IT_Admin_UK
Info 2: PORT_7
Info 3: ROOM_24
Info 4: RACK_3
Info 5: VLAN_ACCESS
Info 6: CNAME: SCOM1
Info 7: FLOOR_23
Info 8: THAMES_ESTATE

Owner: Inder
Company: IDEAL NETWORKS
Address 1: 15 CHENINGWORTH RD
Address 2: OSFORD ROAD
City:
State:
Zip:
Country: UK
Phone1: 0844149486472
Phone2:

PASS
Test0017
EIN: 005066-888070
System Name: Switch 2
System Description: C3847V3 ProStack 48-port Gigabit E
IP Address: 172.20.1.4
Port Address: 58-56-43-6a-b2-5e
Port Description: g25
Capabilities: g25
VLAN:
PoE Power (W):



Port	Line Rate	duplex	Speed	duplex	Speed	duplex	Speed	duplex	Speed
172.20.1.4	1000 Mb/s	Full Duplex	172.20.24	1000 Mb/s	Full Duplex	172.20.24	1000 Mb/s	Full Duplex	172.20.24

Pair	Min	Max	Pair	Min	Max	Pair	Min	Max	Pair
12-34	0	0	12-34	0	0	12-34	0	0	12-34

Destination	Address	Pauses	Length	Time	Pauses	Length	Time	Pauses	Length
172.20.1.1	172.20.1.1	0	64	0	0	64	0	0	64

Destination	Address	Pauses	Length	Time	Pauses	Length	Time	Pauses	Length
172.22.1.1	172.22.1.1	0	64	0	0	64	0	0	64

Destination	Address	Pauses	Length	Time	Pauses	Length	Time	Pauses	Length
172.20.0.3	172.20.0.3	0	64	0	0	64	0	0	64

Destination	Address	Pauses	Length	Time	Pauses	Length	Time	Pauses	Length
www.google.com	www.google.com	0	64	0	0	64	0	0	64

Destination	Address	Max Hops	Timeout	Total	Time 1	Time 2	Time 3	Time 4	Time 5
www.google.com	www.google.com	3	3	0	0.000	0.000	0.000	0.000	0.000

Host	Address	Scan Range	Max Hosts	Hosts Found	IP Address	MAC Address	IP Address	MAC Address	IP Address
172.20.20.20	172.20.20.20	172.20.20.20	256	256	172.20.20.23	172.20.20.23	172.20.20.23	172.20.20.23	172.20.20.23
172.20.20.26	172.20.20.26	172.20.20.26	256	256	172.20.20.39	172.20.20.39	172.20.20.39	172.20.20.39	172.20.20.39
172.20.20.46	172.20.20.46	172.20.20.46	256	256	172.20.20.48	172.20.20.48	172.20.20.48	172.20.20.48	172.20.20.48
172.20.20.51	172.20.20.51	172.20.20.51	256	256	172.20.20.54	172.20.20.54	172.20.20.54	172.20.20.54	172.20.20.54
172.20.20.53	172.20.20.53	172.20.20.53	256	256	172.20.20.63	172.20.20.63	172.20.20.63	172.20.20.63	172.20.20.63
172.20.20.67	172.20.20.67	172.20.20.67	256	256	172.20.20.68	172.20.20.68	172.20.20.68	172.20.20.68	172.20.20.68
172.20.20.18	172.20.20.18	172.20.20.18	256	256	172.20.20.80	172.20.20.80	172.20.20.80	172.20.20.80	172.20.20.80
172.20.20.81	172.20.20.81	172.20.20.81	256	256	172.20.20.83	172.20.20.83	172.20.20.83	172.20.20.83	172.20.20.83

Created: October 21 2015 22:28



IDEAL NETWORKS

Page 19 of 25

Optional Accessories

Part No.	Description
MGKSX1	1 x 850nm SX MM SFP + fibre patch cord accessories kit
MGKLX2	1 x 1310nm LX SM SFP + fibre patch cord accessories kit
MGKZX3	1 x 1550nm ZX SM SFP + fibre patch cord accessories kit
150058	RJ-45 replacement kit - Pack of 10 replacement inserts with extraction tool

For a full list of optional accessories, please visit our website.

Basic Specifications

Max. No. of Jobs	Max. No. of Stored Test	Max. Length	Battery Life	Dimensions per handset in mm	Weight per handset
50	5000	181 m/593 ft.	5 hours	175 x 80 x 40	0.4 kg

For detailed specifications, please visit our website.



IDEAL NETWORKS

Apple and the Apple logo are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

All Rights Reserved. IDEAL, IDEAL NETWORKS, IDEAL AnyWARE and the NaviTEK logos are trademarks or registered trademarks of IDEAL INDUSTRIES LIMITED or IDEAL INDUSTRIES, INC.

IDEAL INDUSTRIES NETWORKS DIVISION
Unit 3, Europa Court, Europa Boulevard, Warrington,
Cheshire, WA5 7TN, UK.

Tel. +44 (0)1925 444 446 | Fax. +44 (0)1925 445501

uksales@idealnwd.com

www.idealnetworks.net



A subsidiary of
IDEAL INDUSTRIES INC.



IDEAL INDUSTRIES, INC.

Specification subject to change
without notice. E&OE

© IDEAL Networks 2015

Publications no: 151851, Rev. 1