

radius



PRT66LT

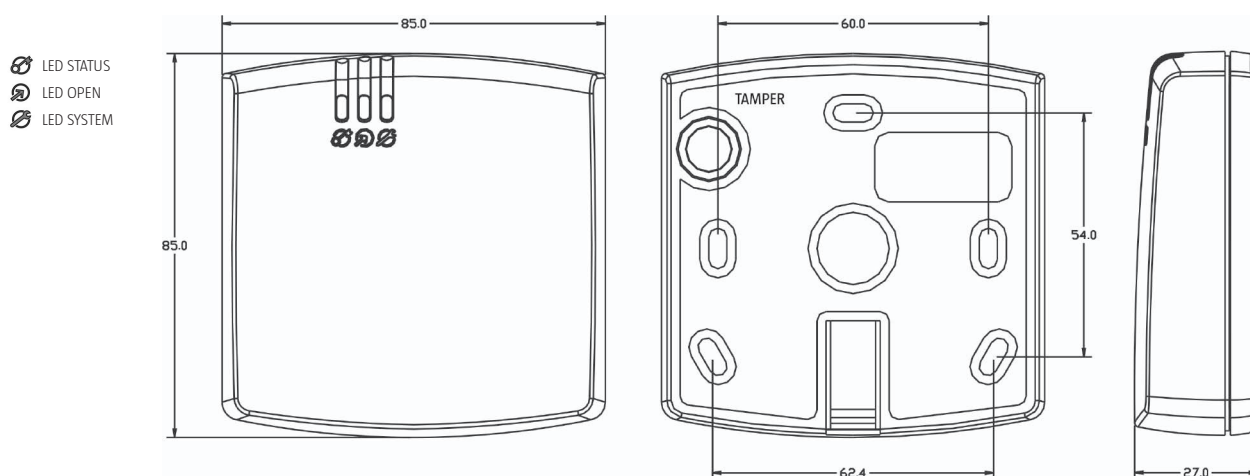
Each PRT66LT reader can be used as an universal identification point connected to the access controller.

PRT66LT readers can operate in many common communication standards (e.g. Wiegand, Mag-stripe, Clock and Data, RACS), so they can cooperate with majority of controllers from different vendors available on the market.



Features:

- EM 125 kHz cards
- Programmable data output format
- Formats: Wiegand 26-66 bits, Magstripe (Clock and data), RACS (Roger) and other
- Various ways of PIN and keypad codes transmission
- LED and Buzzer controlled through separate inputs
- Tamper
- CE mark

PRT66LT views and installation diagram**Available versions and symbols**

Symbol	Description
PRT66LT-G	Dark grey case
PRT66LT-S	Silver-metallic case
PRT66LT-W	White case

Technical Specification

Parameter	Value
Supply voltage	10-15 VDC
Current consumption (average)	45mA
Anti-sabotage protection (Tamper)	NC contact, 50mA/24V, IP67
Reading distance	Up to 15 cm
Environmental class	Class IV, outdoor-general, temperature: -25°C - +60°C, relative humidity: 10 to 95% (non condensing)
Dimensions H x W x D	85 X 85 X 27 mm
Weight	≈120g
Approvals	CE