

Aneto 3-Circuit White 2520lm 3000K Ra>90 On/Off

Article code: 320713
 EAN: 7021983207135



Electrical

Wattage: 30W
 System wattage: 30W
 Max. luminaires per circuit breaker: B10: 15, B16: 25, C10: 26, C16: 42

Light technic

Type of light source: LED (not exchangeable)
 Luminous flux: 2520lm
 Efficacy: 84 lm/W
 Colour temperature: 3000K
 Colour rendering (CRI): Ra>90
 MacAdams factor: SDCM: 2
 Lifetime: L90/B10>100,000
 Light distribution: Direct
 Optic: Reflector
 Beam angle: 32°
 Visible flicker (PstLM): 0.01
 Stroboscopic flicker (SVM): 0.01
 Photobiological safety: RG 1

Control/Dimming

Type: On/Off

Protection

Luminaire class: Class II

Energy and approvals

Energy class (2021-): E
 Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
 Colour: Matte white (RAL 9003)
 Optics: Glass

Mounting/Connection



Mounting: Surface, Indoor

Dimensions (mm)

Length (mm) L: 120
 Width (mm) W: 95
 Height (mm) H: 120
 Diameter (D): 95
 Weight (brutto/netto): 0.95 / 0.94

Packaging

Packing dimensions (mm): 170 x 103 x 175

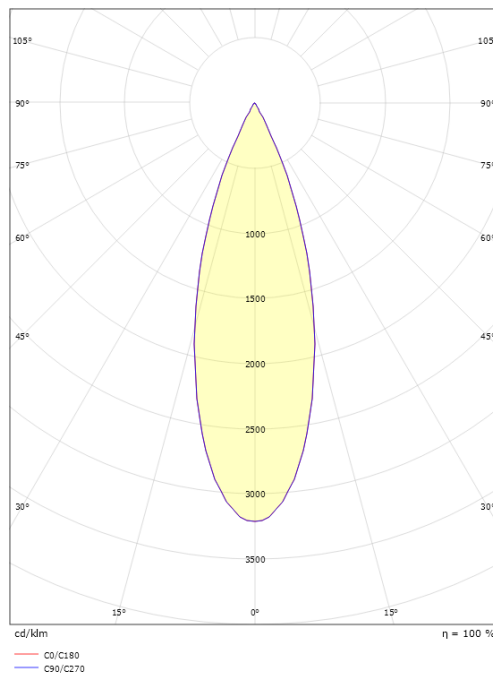

7 0 2 1 9 8 3 2 0 7 1 3 5