

Aneto 3-Circuit Black 2520lm 3000K Ra>90 On/Off

Article code: 320715
EAN: 7021983207159



Electrical

Wattage: 30W
System wattage: 30W
Max. luminaires per circuit breaker: B10: 15, B16: 25, C10: 26, C16: 42

Light technic

Type of light source: LED (not exchangeable)
Luminous flux: 2520lm
Efficacy: 84 lm/W
Colour temperature: 3000K
Colour rendering (CRI): Ra>90
MacAdams factor: SDCM: 2
Lifetime: L90/B10>100,000
Light distribution: Direct
Optic: Reflector
Beam angle: 32°
Visible flicker (PstLM): 0.01
Stroboscopic flicker (SVM): 0.01
Photobiological safety: RG 1

Control/Dimming

Type: On/Off

Protection

Luminaire class: Class II

Energy and approvals

Energy class (2021-): E
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Black (RAL 9004)
Optics: Glass

Mounting/Connection



Mounting: Surface, Indoor

Dimensions (mm)

Length (mm) L: 120
Width (mm) W: 95
Height (mm) H: 120
Diameter (D): 95
Weight (brutto/netto): 0.95 / 0.94

Packaging

Packing dimensions (mm): 170 x 103 x 175

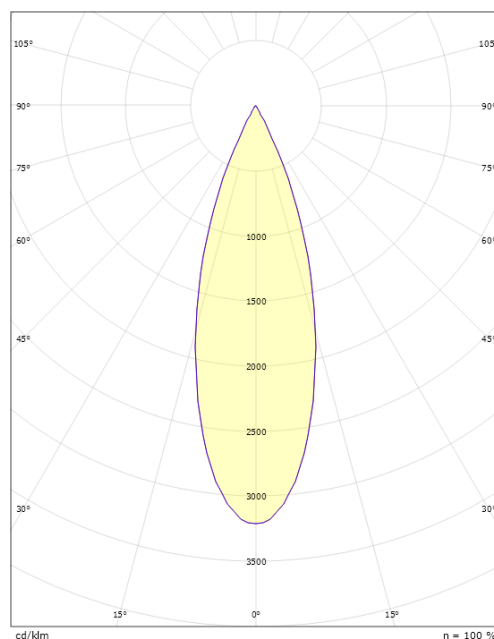

cd/kdm
C0/C180
C90/C270

η = 100 %



7 0 2 1 9 8 3 2 0 7 1 5 9