

Product Environmental Profile

Vigi 200-440V 4P for NSX400/630






General information

Representative product	Vigi 200-440V 4P for NSX400/630 - LV432465
Description of the product	The Vigicompact NSX400/630 is the combination of compact NSX400/630 4 pole circuit breaker , Trip Unit (TMD or Electronic Micrologic) and 4 pole Vigi module. The Compact NSX400/630 4P circuit breaker equipped with Micrologic 2.3 trip unit is designed to provide protection against overloads and short-circuits for industrial and commercial electrical distribution systems with assigned voltage upto 200 to 440V and rated current from 400A to 630A. The main purpose of the 4P Vigi module is to protect installations against insulation faults. Earth-leakage protection is achieved by installing a vigi module directly on the downstream side of the circuit breaker terminals. It directly actuates the toggle mechanism of the breaker through the trip unit (magnetic, thermal-magnetic or Micrologic).
Functional unit	Protect during 20 years the installation against overloads and short-circuits and people and premises at risk of fire or explosion against insulation defects in circuit with assigned voltage 200 - 440V and rated current 400A-630A.



Constituent materials

Reference product mass	3573.3 g including the product, its packaging and additional elements and accessories
------------------------	---

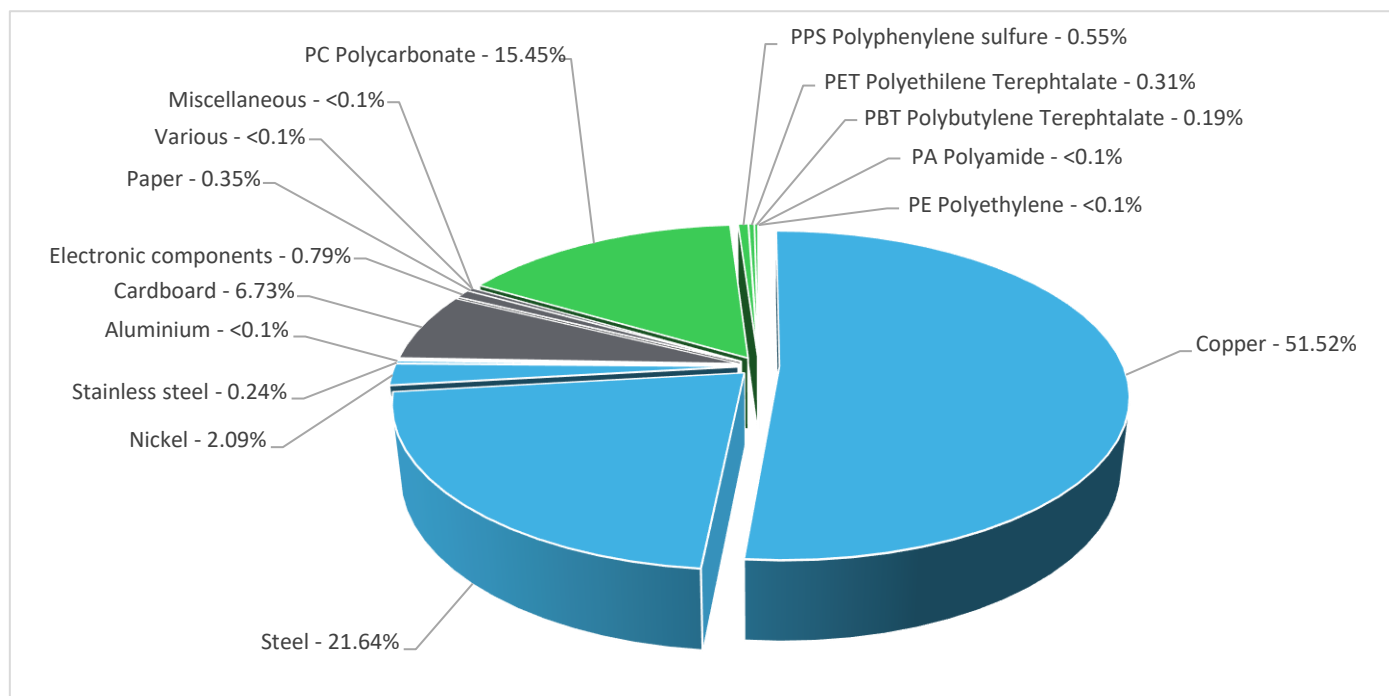

Plastics	16.5%
Metals	75.6%
Others	7.9%



Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate– BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



Additional environmental information

The Vigi 200-440V 4P for NSX400/630 presents the following relevant environmental aspects

Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 253.3 g, consisting of Cardboard (94.98%), Paper(4.74%), PE film (0.28%) Product distribution optimised by setting up local distribution centres
Installation	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal).
Use	The product does not require special maintenance operations.
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials This product contains Electronic card (19.98g) , Brominate FR (14g) that should be separated from the stream of waste so as to optimize end-of-life treatment. The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME). Recyclability potential: 72%



Environmental impacts


Reference life time	20 years			
Product category	Other equipments - Passive product - non-continuous operation			
Installation elements	No special installation components need during installation phase, but transport of packaging to disposal, and disposal of packaging accounted for during installation.			
Use scenario	The product is in active mode 30% of the time with a power use of 8.96W and in Off mode 70% of the time with a power use of 0W, for 20 years			
Geographical representativeness	Europe , China , France			
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are similar and representative of the actual type of technologies used to make the product in production.			
Energy model used	Manufacturing	Installation	Use	End of life
	Italy	Electricity Mix; AC; consumption mix, at consumer; 1kV - 60kV; EU-27, at consumer; 220V; CN	Electricity Mix; AC; consumption mix, at consumer; 1kV - 60kV; EU-27, at consumer; 220V; CN	Electricity Mix; AC; consumption mix, at consumer; 1kV - 60kV; EU-27, at consumer; 220V; CN

Compulsory indicators

Vigi 200-440V 4P for NSX400/630 - LV432465

Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	3.60E-03	3.60E-03	0*	0*	7.06E-06	0*
Contribution to the soil and water acidification	kg SO ₂ eq	1.27E+00	3.56E-02	2.11E-03	0*	1.23E+00	9.89E-04
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	1.41E-01	3.46E-02	4.85E-04	1.41E-05	1.06E-01	2.58E-04
Contribution to global warming	kg CO ₂ eq	3.85E+02	1.34E+01	4.61E-01	0*	3.71E+02	4.40E-01
Contribution to ozone layer depletion	kg CFC11 eq	3.56E-05	1.63E-06	0*	0*	3.40E-05	2.25E-08
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	8.05E-02	3.34E-03	1.50E-04	0*	7.69E-02	1.05E-04

Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	1.12E+00	5.08E-01	0*	0*	6.11E-01	4.27E-04
Total Primary Energy	MJ	6.86E+03	2.55E+02	6.52E+00	0*	6.59E+03	4.89E+00

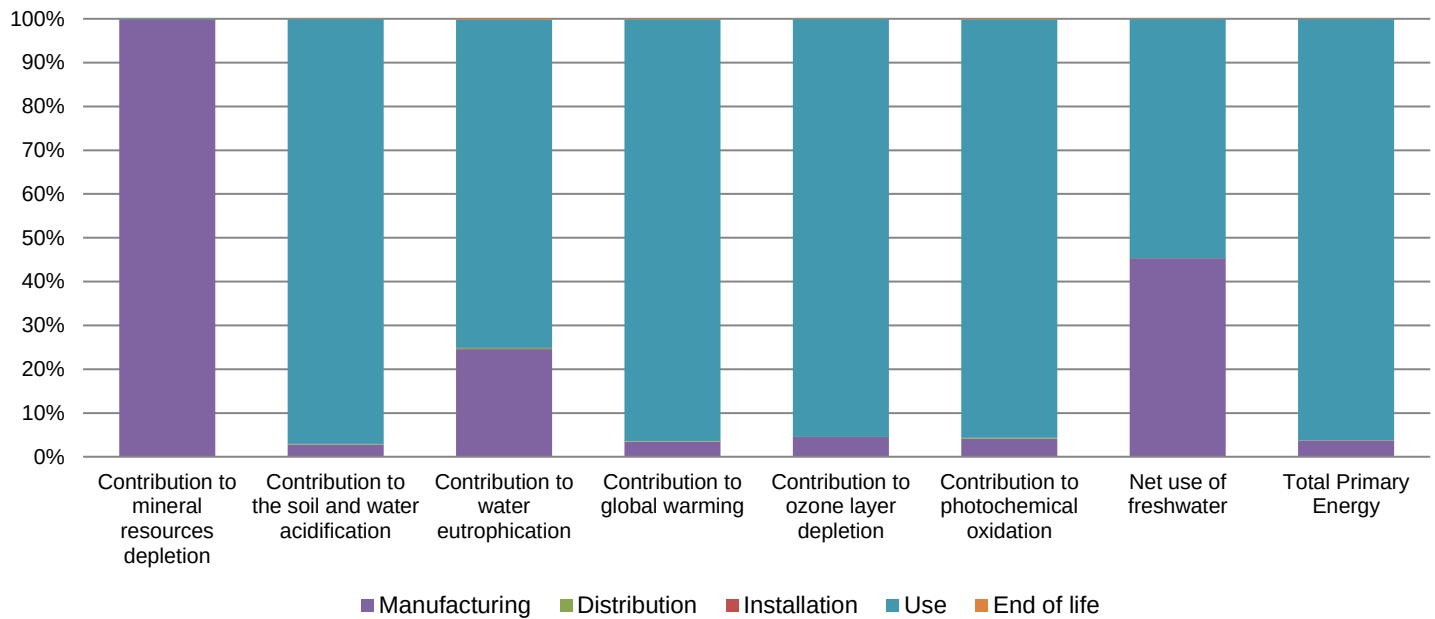

Optional indicators		Vigi 200-440V 4P for NSX400/630 - LV432465					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	5.13E+03	1.49E+02	6.48E+00	0*	4.97E+03	3.92E+00
Contribution to air pollution	m³	4.08E+04	1.04E+04	1.96E+01	0*	3.04E+04	3.48E+01
Contribution to water pollution	m³	1.91E+04	1.55E+03	7.58E+01	2.08E+00	1.74E+04	4.02E+01
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	5.01E-01	5.01E-01	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	4.07E+02	1.42E+01	0*	0*	3.93E+02	0*
Total use of non-renewable primary energy resources	MJ	6.45E+03	2.41E+02	6.51E+00	0*	6.20E+03	4.88E+00
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	4.02E+02	9.24E+00	0*	0*	3.93E+02	0*
Use of renewable primary energy resources used as raw material	MJ	4.99E+00	4.99E+00	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	6.43E+03	2.23E+02	6.51E+00	0*	6.20E+03	4.88E+00
Use of non renewable primary energy resources used as raw material	MJ	1.85E+01	1.85E+01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	2.59E+02	2.47E+02	0*	0*	7.72E+00	4.31E+00
Non hazardous waste disposed	kg	5.45E+02	1.16E+01	0*	0*	5.33E+02	0*
Radioactive waste disposed	kg	4.09E-01	4.86E-03	0*	0*	4.04E-01	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	2.90E+00	2.72E-01	0*	2.52E-01	0*	2.38E+00
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	4.17E-02	0*	0*	0*	0*	4.17E-02
Exported Energy	MJ	7.99E-04	7.51E-05	0*	7.24E-04	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2016-11 in compliance with ISO14044.

The Manufacturing phase is impacting on Indicator of Abiotic depletion (elements, ultimate ultimate reserves) (ADPe for EN15804). The Manufacturing phase & Use phase are impacting equally on Indicator of Net use of freshwater. And the use phase is the life cycle phase which has the greatest impact on the rest of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-00663-V01.01-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Verifier accreditation N°	VH39	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Date of issue	03/2021	Information and reference documents	www.pep-ecopassport.org
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal	External X		
The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)			
PEP are compliant with XP C08-100-1 :2016			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			





Schneider Electric Industries SAS
Country Customer Care Center
<http://www.schneider-electric.com/contact>
35, rue Joseph Monier
CS 30323
F- 92506 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €

www.se.com

Published by Schneider Electric

SCHN-00663-V01.01-EN

© 2019 - Schneider Electric – All rights reserved

03/2021