

MOTOR OPERATOR 110-230 V AC / 110-250 V DC
ACCESSORY FOR: 3VA2 100//160/250



Similar to image

Technical data:		
Accessories		Motorized operating mechanism (MO)
Type of the driving mechanism		motorized operating mechanism
Ambient temperature		
• during storage	°C	-40 ... +80
• during operating	°C	-25 ... +70
Control supply voltage		
• at 50 Hz / at AC / rated value	V	110 ... 230
• at 60 Hz / at AC / rated value	V	110 ... 230
• for DC / rated value	V	110 ... 250
Type of current / for actuation		AC/DC
Break time / typical	s	800
Make time / typical	s	800
IP degree of protection / with closed switch		
• without cover or cable lug cover		IP20, with masking frame IP30
Section de conducteur raccordable		
• solid	mm²	1.5 ... 2.5
• multibrin	mm²	1.5 ... 2.5
• finely stranded		

• with wire end processing	mm ²	1.5 ... 2.5
Starting torque	N·m	0.36 ... 0.44
Wire stripping length	mm	7
Pulse duration / minimum	ms	100
Operating cycles / maximum	1/h	120
Product function / bus-communication		No
Operating apparent output	V·A	250
Operating range factor control supply voltage rated value		
• at 50 Hz		
• for AC		0.85 ... 1.1
• at 60 Hz		
• for AC		1.1 ... 0.85
• for DC		0.85 ... 1.1

Certificates/approvals:

Declaration of Conformity

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA9267-0HA20>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<http://support.automation.siemens.com/WW/view/en/3VA9267-0HA20/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9267-0HA20

CAX-Online-Generator

<http://www.siemens.com/cax>

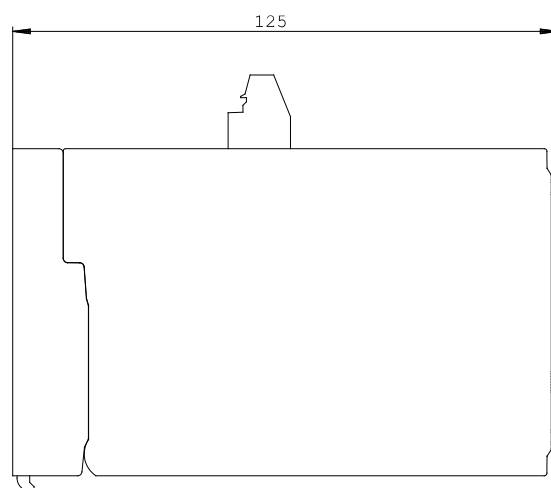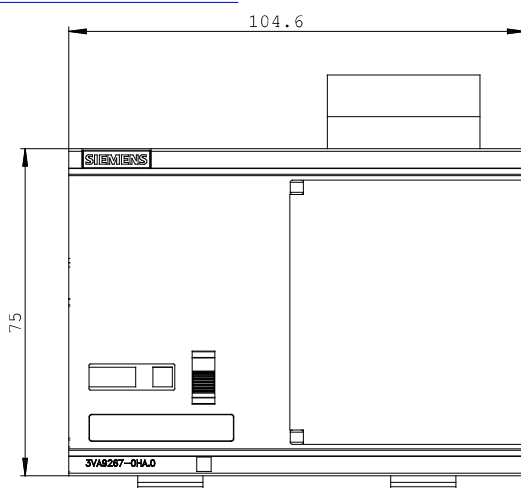

last change:

Apr 21, 2014