




IP Switch Master for MDRC installation to connect up to 5 terminal devices. Can be extended to 10 terminal devices through lateral coupling with the IP Switch Slave (ISS/S). One port is a Gigabit-Ethernet port and can be used as uplink port. Each port has three LEDs for showing the respective status. The slave receives its data exclusively via the master and is inoperative without it.

Technical Data

General	Housing	DIN rail mounting
	Power supply	integrated (ISM/S)
	RJ45-Ports	5 (10 with ISS/S)
	MAC addresses	up to 4096 storable
	Interface	MDI/MDIx
	Bitrate	10/100/1000 Mbit/s (1 x 1000 Mbit-port each)
Functions	autopartitioning	
	autosensing	
	Store and forward switching architecture	
	autonegotiation	
	arbitrarily cascadable	
	semi and full duplex operation	
Mechanical features	Material	PA
	Operating temperature	-5 °C to +45 °C
	Storage temperature	-25 °C to +70 °C
	Enclosure (DIN EN 60 529)	IP20
	Safety class (DIN EN 61 140)	II
	Display elements	LEDs
	Weight	280 g (ISM/S) 150 g (ISS/S)
	Colour	grey (similar RAL 7035)
Dimensions (ISM/S or ISS/S)	Width	108 mm
	Height	90 mm
	Depth	67 mm
	Mounting Width	6 modules at 18 mm
Plug connection/socket	Connection	5 (10) x RJ45 ports acc. E DIN IEC 60 603-7-5:2003-03
Electrical features	Nominal voltage	90 – 240 V~, 50 – 60 Hz
	Maximum power consumption	4,3 W (ISM/S and ISS/S)
Conformity mark	CE	

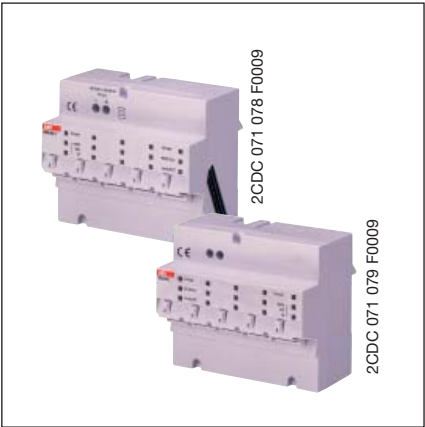