

FDV

2

ELnumber	Material No.	Material Discription
4337449	1SCA022057R0570	AKSEL 130mm OXP6X130
4337450	1SCA022295R5600	AKSEL 150mm OXP6X150
4337455	1SCA022067R1760	AKSEL 161mm OXP6X161
4337465	1SCA022325R7100	AKSEL 166mm OXP12X166
4337346	1SCA022295R6080	AKSEL 210mm OXP6X210
4337347	1SCA022042R6370	AKSEL 290mm OXP6X290
4337451	1SCA022042R6530	AKSEL 360mm OXP6X360
4337452	1SCA022056R6030	AKSEL 430mm OXP6X430
4337340	1SCA022325R6980	AKSEL OXP12X250
4337341	1SCA022137R5140	AKSEL OXP12X280
4337342	1SCA022042R5810	AKSEL OXP12X325
4337343	1SCA022042R5990	AKSEL OXP12X395
4337344	1SCA022042R6020	AKSEL OXP12X465
4337345	1SCA022042R6110	AKSEL OXP12X535
4363599	1SCA101654R1001	AKSEL OXS6X120
4363600	1SCA101655R1001	AKSEL OXS6X130
4363601	1SCA101659R1001	AKSEL OXS6X180
4363603	1SCA101660R1001	AKSEL OXS6X250
4363602	1SCA101661R1001	AKSEL OXS6X330
4363598	1SCA101647R1001	AKSEL OXS6X85
4337158	1SCA022068R8220	AKSELSTØTTE OETLZX 58
4337205	1SCA022325R6710	Rod OXP12X185
4363604	1SCA101656R1001	SHAFT OXS6X160
4337453	1SCA022190R1560	SKJØTEHYLSE OESAZX167
4337068	1SCA022083R5620	SKJØTEHYLSE OETLZX 95
4337454	1SCA022093R1850	SOKKEL F/SKJØTEHYLSE OETLZK19

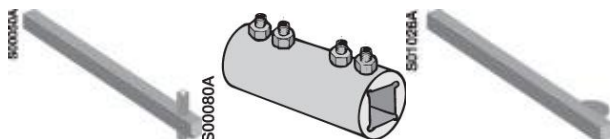


ABB AS, Low Voltage Products

Inngår i Part of
ABB AS

Adresse Address
Postboks 100 Sentrum
Amm. Aallsgt. 97
3701 SKIEN
Norway

Telefon Phone
Nasjonal 03500
International +47 22872000

Web:
www.abb.no/automasjonsprodukter
Product catalogue online:
www.abblvp.no

Foretaksregisteret
Register of Business Enterprises
NO982 085 160MVA



Handled by
Matti Tuononen

Date
27/06/2014

Pages
1 (2)

Letter of confirmation

To whom it may concern

We hereby confirm that the listed ABB products can be used in ambients specified below:

OT16F...160E_ , OT16...125F_C_

- Storage & transportation ambient temperatures
 - o - 40C ...+ 55C, short time (2h/24h) + 70C. Ambient humidity as specified in IEC60947-1 standard.
- Operation ambient temperatures
 - o Continuously - 5C ... + 35C, short time (2h/24h) + 40C, as specified in IEC60947-1 standard. Product ratings as shown in the documentation.
 - o At - 40C the maximum number of cold starts is 100 operations.
 - o In ambient temperatures over + 35C the current ratings must be derated according to the manufacturers instructions. Ambient humidity shall not exceed the level specified in the standard IEC60947-1.

OT200...4000E_ , OT160...3200E_C_ , OS32G_ ... OS1250_ , OTDC16_ ... 500_

- Storage & transportation ambient temperatures
 - o - 40C ...+ 55C, short time (2h/24h) + 70C. Ambient humidity as specified in IEC60947-1 standard.
- Operation ambient temperatures
 - o Continuously - 5C ... + 35C, short time (2h/24h) + 40C, as specified in IEC60947-1 standard. Product ratings as shown in the documentation.

ABB Oy

Low Voltage Products
Business Identity Code: 0763403-0 VAT-
code FI07634030
Domicile: Helsinki

Visiting Address
Muottitie 2 A
FI-65320 Vaasa
FINLAND

Postal Address
P.O. Box 622
FI-65101 Vaasa
FINLAND

Company Address
Strömbergintie 1
FI-00380 Helsinki
FINLAND

Telephone
+358 10 22 11
Telefax
+358 10 22 45708

Internet
www.abb.fi
e-mail:
first name.last name
@fi.abb.com

- At - 35C the endurance values according to the requirements of category B.
- In ambient temperatures over + 35C the current ratings must be derated according to the manufacturers instructions. Ambient humidity shall not exceed the level specified in the standard IEC60947-1.

Yours faithfully



Martti Tuononen

Product manager