

FDV

3

4337844	1SCA022731R8310	Avdekning kort OTS250G1S/3
4337846	1SCA022731R8400	Avdekning kort OTS250G1S/4
4337873	1SCA022736R9060	Avdekning kort OTS400G1S/3
4337875	1SCA022736R9650	Avdekning kort OTS400G1S/4
4337040	1SCA022776R8190	Avdekning kort OTS800G1S/3
4337042	1SCA022776R8270	Avdekning kort OTS800G1S/4
4337845	1SCA022731R8150	Avdekning lang OTS250G1L/3
4337847	1SCA022731R8230	Avdekning lang OTS250G1L/4
4337872	1SCA022736R8840	Avdekning lang OTS400G1L/3
4337874	1SCA022736R9490	Avdekning lang OTS400G1L/4
4337039	1SCA022776R7890	Avdekning lang OTS800G1L/3
4337041	1SCA022776R7970	Avdekning lang OTS800G1L/4
4337653	1SCA022379R9760	Avdekning OTS125T1
4337651	1SCA022379R9680	Avdekning OTS125T3
4337447	1SCA022495R4610	Avdekning OTS160T3
4337448	1SCA022495R4700	Avdekning OTS160T4
4363596	1SCA105314R1001	Avdekning OTS40T1
4363594	1SCA105317R1001	Avdekning OTS40T3
4337568	1SCA022353R6910	Avdekning OTS63T1
4337566	1SCA022353R6750	Avdekning OTS63T3
2437857	1SCA022264R0010	AVDEKNING OZXB 2K
2437858	1SCA022264R0440	AVDEKNING OZXB 3K
2437859	1SCA022199R2850	AVDEKNING OZXB 4K
1682621	1SCA022731R8910	KLEMMEDSEKSEL OSS200G1L/3
1682623	1SCA022731R9040	KLEMMEDSEKSEL OSS200G1L/4
1682620	1SCA022732R0130	KLEMMEDSEKSEL OSS200G1S/3
1682622	1SCA022732R0050	KLEMMEDSEKSEL OSS200G1S/4
1682625	1SCA022731R9390	KLEMMEDSEKSEL OSS250G1L/3
1682627	1SCA022731R9470	KLEMMEDSEKSEL OSS250G1L/4
1682626	1SCA022731R9630	KLEMMEDSEKSEL OSS250G1S/4
4337094	1SCA022644R6700	KLEMMEDSEKSEL OZXB2K/1
4337095	1SCA022644R6880	KLEMMEDSEKSEL OZXB3K/1
4337096	1SCA022644R6960	KLEMMEDSEKSEL OZXB4K/1
2437861	1SCA022283R8040	KLEMMEDSEKSEL OZXB5K
4337097	1SCA022644R7000	KLEMMEDSEKSEL OZXB5K/1

ABB AS, Low Voltage Products

Inngår i Part of
ABB AS

Adresse Address
Postboks 100 Sentrum
Amm. Aallsgt. 97
3701 SKIEN
Norway

Telefon Phone
Nasjonal 03500
International +47 22872000

Web:
www.abb.no/automasjonsprodukter
Product catalogue online:
www.abblvp.no

Foretaksregisteret
Register of Business Enterprises
NO982 085 160MVA

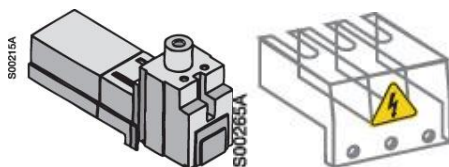


ABB AS, Low Voltage Products

Inngår i *Part of*
ABB AS

Adresse *Address*
Postboks 100 Sentrum
Amm. Aallsgt. 97
3701 SKIEN
Norway

Telefon *Phone*
Nasjonal 03500
International +47 22872000

Web:
www.abb.no/automasjonsprodukter
Product catalogue online:
www.abblvp.no

Foretaksregisteret
Register of Business Enterprises
NO982 085 160MVA



Handled by
Matti Tuononen

Date
27/06/2014

Pages
1 (2)

Letter of confirmation

To whom it may concern

We hereby confirm that the listed ABB products can be used in ambients specified below:

OT16F...160E_ , OT16...125F_C_

- Storage & transportation ambient temperatures
 - o - 40C ...+ 55C, short time (2h/24h) + 70C. Ambient humidity as specified in IEC60947-1 standard.
- Operation ambient temperatures
 - o Continuously - 5C ... + 35C, short time (2h/24h) + 40C, as specified in IEC60947-1 standard. Product ratings as shown in the documentation.
 - o At - 40C the maximum number of cold starts is 100 operations.
 - o In ambient temperatures over + 35C the current ratings must be derated according to the manufacturers instructions. Ambient humidity shall not exceed the level specified in the standard IEC60947-1.

OT200...4000E_ , OT160...3200E_C_ , OS32G_ ... OS1250_ , OTDC16_ ... 500_

- Storage & transportation ambient temperatures
 - o - 40C ...+ 55C, short time (2h/24h) + 70C. Ambient humidity as specified in IEC60947-1 standard.
- Operation ambient temperatures
 - o Continuously - 5C ... + 35C, short time (2h/24h) + 40C, as specified in IEC60947-1 standard. Product ratings as shown in the documentation.

ABB Oy

Low Voltage Products
Business Identity Code: 0763403-0 VAT-Muotitie 2 A
code FI07634030
Domicile: Helsinki

Visiting Address
Muotitie 2 A
FI-65320 Vaasa
FINLAND

Postal Address
P.O. Box 622
FI-65101 Vaasa
FINLAND


Company Address
Strömbergintie 1
FI-00380 Helsinki
FINLAND

Telephone
+358 10 22 11
Telefax
+358 10 22 45708

Internet
www.abb.fi
e-mail:
first name.last name
@fi.abb.com

- At - 35C the endurance values according to the requirements of category B.
- In ambient temperatures over + 35C the current ratings must be derated according to the manufacturers instructions. Ambient humidity shall not exceed the level specified in the standard IEC60947-1.

Yours faithfully



Martti Tuononen

Product manager