

FDV

7

ELnumber	Material No.	Material Discription
2437821	1SCA022193R9880	Cable Clamp OZXB 1/1
4337431	1SCA022469R6220	KABELKLEMME AL/CU.1 STK.OZXL1
4337430	1SCA022439R6770	KABELKLEMME AL/CU.3 STK.OZXL1
2437865	1SCA022169R2030	Kabelklemme OZXB1L
2437866	1SCA022194R0030	Kabelklemme OZXB1L/1
2437867	1SCA022119R7610	Kabelklemme OZXB2 (3 STK)
2437823	1SCA022194R0200	Kabelklemme OZXB2/1
2437868	1SCA022158R7750	Kabelklemme OZXB2L (3 STK)
2437824	1SCA022194R0460	Kabelklemme OZXB2L/1
2437871	1SCA022136R8100	Kabelklemme OZXB3 (3 STK)
2437826	1SCA022194R0620	Kabelklemme OZXB3/1
2437872	1SCA022137R4760	Kabelklemme OZXB4 (3 STK)
2437828	1SCA022194R0890	Kabelklemme OZXB4/1
2437830	1SCA022194R1010	Kabelklemme OZXB5/1
2437832	1SCA022194R1270	Kabelklemme OZXB6/1
2437834	1SCA022194R1430	Kabelklemme OZXB7/1
2437874	1SCA022185R7130	Kabelklemme OZXB7L (3 STK)
2437875	1SCA022194R1600	Kabelklemme OZXB7L/1
2437836	1SCA022744R1510	Kabelklemme OZXB8 (SETT-3 STK)
2437837	1SCA022744R1600	Kabelklemme OZXB8/1
2437869	1SCA022750R3210	Kabelklemme OZXB9B (3 STK)
2437870	1SCA022750R3300	Kabelklemme OZXB9B/1
2437864	1SCA022809R0240	KABELKLEMME OZXE45
4337078	1SCA022809R3180	KABELKLEMME OZXE46
4337079	1SCA022733R9150	KABELKLEMME OZXE54
4337092	1SCA022811R5920	KABELKLEMME OZXE56
4337093	1SCA022811R6060	KABELKLEMME OZXE57
2437819	1SCA022469R6490	Kabelklemme OZXT 1/1 1pr.pose
2437822	1SCA022631R5600	Kabelklemme OZXT 2/1
4337077	1SCA022647R2880	Kabelklemme OZXT 3/1
4337427	1SCA022469R6310	Kabelklemme OZXT1 3stk
4337428	1SCA022620R7200	Kabelklemme OZXT2 3stk
4337429	1SCA022639R0720	Kabelklemme OZXT3 3stk
4337456	1SCA122537R1001	KABELKLEMME OZXT6 (3stk)
2437873	1SCA022185R0040	Kableklemme OZXB7 (3 STK)

ABB AS, Low Voltage Products

Inngår i Part of
ABB AS

Adresse Address
Postboks 100 Sentrum
Amm. Aallsgt. 97
3701 SKIEN
Norway

Telefon Phone
Nasjonal 03500
International +47 22872000

Web:
www.abb.no/automasjonsprodukter
Product catalogue online:
www.abblvp.no

Foretaksregisteret
Register of Business Enterprises
NO982 085 160MVA

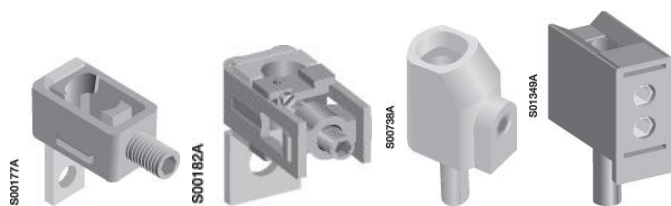


ABB AS, Low Voltage Products

Inngår i *Part of*
ABB AS

Adresse *Address*
Postboks 100 Sentrum
Amm. Aallsgt. 97
3701 SKIEN
Norway

Telefon *Phone*
Nasjonal 03500
International +47 22872000

Web:
www.abb.no/automasjonsprodukter
Product catalogue online:
www.abblvp.no

Foretaksregisteret
Register of Business Enterprises
NO982 085 160MVA



Handled by
Matti Tuononen

Date
27/06/2014

Pages
1 (2)

Letter of confirmation

To whom it may concern

We hereby confirm that the listed ABB products can be used in ambients specified below:

OT16F...160E_ , OT16...125F_C_

- Storage & transportation ambient temperatures
 - o - 40C ...+ 55C, short time (2h/24h) + 70C. Ambient humidity as specified in IEC60947-1 standard.
- Operation ambient temperatures
 - o Continuously - 5C ... + 35C, short time (2h/24h) + 40C, as specified in IEC60947-1 standard. Product ratings as shown in the documentation.
 - o At - 40C the maximum number of cold starts is 100 operations.
 - o In ambient temperatures over + 35C the current ratings must be derated according to the manufacturers instructions. Ambient humidity shall not exceed the level specified in the standard IEC60947-1.

OT200...4000E_ , OT160...3200E_C_ , OS32G_ ... OS1250_ , OTDC16_ ... 500_

- Storage & transportation ambient temperatures
 - o - 40C ...+ 55C, short time (2h/24h) + 70C. Ambient humidity as specified in IEC60947-1 standard.
- Operation ambient temperatures
 - o Continuously - 5C ... + 35C, short time (2h/24h) + 40C, as specified in IEC60947-1 standard. Product ratings as shown in the documentation.

ABB Oy

Low Voltage Products
Business Identity Code: 0763403-0 VAT-Muotitie 2 A
code FI07634030
Domicile: Helsinki

Visiting Address
Muotitie 2 A
FI-65320 Vaasa
FINLAND

Postal Address
P.O. Box 622
FI-65101 Vaasa
FINLAND


Company Address
Strömbergintie 1
FI-00380 Helsinki
FINLAND

Telephone
+358 10 22 11
Telefax
+358 10 22 45708

Internet
www.abb.fi
e-mail:
first name.last name
@fi.abb.com

- At - 35C the endurance values according to the requirements of category B.
- In ambient temperatures over + 35C the current ratings must be derated according to the manufacturers instructions. Ambient humidity shall not exceed the level specified in the standard IEC60947-1.

Yours faithfully



Martti Tuononen

Product manager