

FDV dokumentasjon


Smissline	Typebetegnelse	Varenummer	EAN	El.nummer
Hjelpe- kontakter HK400	Montering v/side S400, F402, FS401			
	HK400 11-L HJ.KONT	2CCS500900R0081	7612270100910	1623608
	HK400 20-L HJ.KONT	2CCF201112R0001	7612270111183	1623600
	HK400 02-L HJ.KONT	2CCF201114R0001	7612270111190	1623601
	Montering h/side S400, F404, IS404			
	HK400 11-R HJ.KONT	2CCS500900R0214	7612270108619	1623613
	HK400 20-R HJ.KONT	2CCF201113R0001	7612270111206	1623611
	HK400 02-R HJ.KONT	2CCF201115R0001	7612270111213	1623612
FDV		Ingen krav til periodisk vedlikehold.		

Tekniske Data

Auxiliary switch

HK400

Rated voltage U_n :	400V
Rated impulse withstand voltage:	4 kV
Rated current:	
– I_{th} :	6A
– AC15	2A/230V / 1A/400V
– DC13	0.55A/125V=
– DC13	0.27A/250V=
Minimum current/voltage:	10mA 12V=
(to ensure reliable electrical operation)	
Connection cross-sections:	2x 1.5 mm ² strand with sleeve
Plastic parts:	Free of halogen und cadmium
Internal resistance R_i :	0.0065 Ω
Power loss at rated current P_v :	0.24 W
Ambient temperature:	$T_{max.} +55^{\circ}C$ $T_{min} -25^{\circ}C$
Anzugsdrehmoment Klemmen:	1 Nm

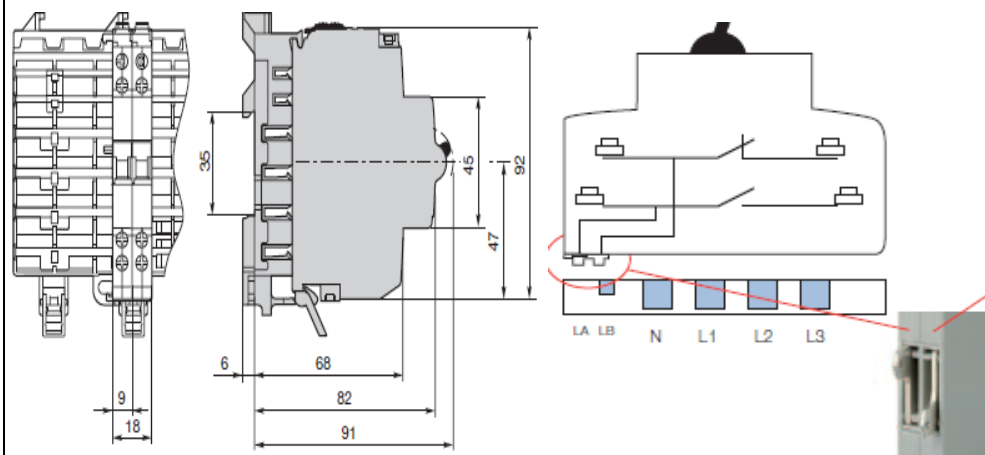

Produsent

Navn

Adresse

Tlf.

E-post



ABB AS

Bergerveien 12
1396 Billingstad

03500

automasjonsprodukter@no.abb.com