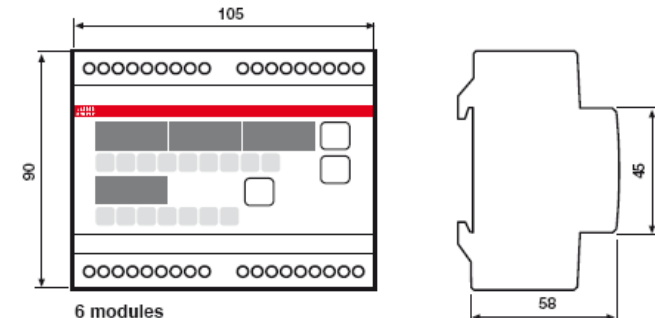


FDV dokumentasjon

Multimeter DMTME	Typebetegnelse	Varenummer	EAN	EI.nummer
	MOD.MULTIMETER DMTME MOD.MULTIMETER DMTME-I-485	2CSM170040R1021 2CSM180050R1021	8012542975700 8012542975809	8027320 8027321

FDV	DIN Multimeter er produsert og testet i henhold til IEC / EN 61010-1	Ingen krav til periodisk vedlikehold.
-----	--	---------------------------------------

Tekniske Data	Technical characteristics																																																																																																																												
	<table> <tr> <td>Auxiliary supply</td><td>[V rms]</td><td>230 +15% - 10% DMTME, DMTME-72 and DMTME-96</td></tr> <tr> <td>[V rms]</td><td></td><td>400 +15% - 10% DMTME-72</td></tr> <tr> <td>[V rms]</td><td></td><td>115 +15% - 10% DMTME, DMTME-96</td></tr> <tr> <td>Frequency</td><td>[Hz]</td><td>45...55</td></tr> <tr> <td>Power consumption</td><td>[VA]</td><td><6</td></tr> <tr> <td>Fuse protection</td><td></td><td>T0.1A</td></tr> <tr> <td colspan="3">Voltage measuring inputs</td></tr> <tr> <td>Range</td><td>[V rms]</td><td>10...500 V (L-N)</td></tr> <tr> <td>Max. non destructive</td><td>[V rms]</td><td>550</td></tr> <tr> <td>Impedance (L-N)</td><td>[MW]</td><td>>8</td></tr> <tr> <td colspan="3">Current measuring inputs (only external CTs .../5 A)</td></tr> <tr> <td>Range</td><td>[A rms]</td><td>0.05...5</td></tr> <tr> <td>Overload</td><td></td><td>1:1 permanent</td></tr> <tr> <td colspan="3">Measurement accuracy</td></tr> <tr> <td>Voltage</td><td></td><td>±0.5% F.S. ±1 digit in range</td></tr> <tr> <td>Current</td><td></td><td>±0.5% F.S. ±1 digit in range</td></tr> <tr> <td>Active power</td><td></td><td>±1% ±0.1% F.S. from cosφ = 0.3 to cosφ = -0.3</td></tr> <tr> <td>Frequency</td><td></td><td>±0.2% ±0.1Hz from 40.0 to 99.9 Hz</td></tr> <tr> <td></td><td></td><td>±0.2% ±1Hz from 100 to 500 Hz</td></tr> <tr> <td colspan="3">Energy metering</td></tr> <tr> <td>Maximum metered value for single phase</td><td></td><td>4,294.9 MWh (MVarh) with KA = KV = 1</td></tr> <tr> <td>Maximum metered value for three phase</td><td></td><td>4,294.9 MWh (MVarh) with KA = KV = 1</td></tr> <tr> <td>Accuracy</td><td></td><td>Class 1</td></tr> <tr> <td>Max. power consumption</td><td>[VA]</td><td>1.4 for each input (with I_{max} = 5A rms)</td></tr> <tr> <td colspan="3">Digital outputs</td></tr> <tr> <td>Pulse duration</td><td></td><td>50 ms OFF (min)/ 50 ms ON</td></tr> <tr> <td>V_{max} on contact</td><td></td><td>48 V (d.c. or a.c. peak)</td></tr> <tr> <td>W_{max} dissipation</td><td></td><td>450 mW</td></tr> <tr> <td>Max frequency</td><td></td><td>10 pulses/sec</td></tr> <tr> <td>I_{max} contact</td><td></td><td>100 mA (d.c. or a.c. peak value)</td></tr> <tr> <td>Insulation</td><td></td><td>750 V_{max}</td></tr> <tr> <td colspan="3">Programmable parameters</td></tr> <tr> <td>kV T transformer ratio V_{prim}/V_{sec}</td><td></td><td>1...500</td></tr> <tr> <td>kCT transformer ratio I_{prim}/I_{sec}</td><td></td><td>1...1,250</td></tr> <tr> <td>Free hour counter</td><td>[h]</td><td>0...10,000,000, resettable</td></tr> <tr> <td>Countdown</td><td>[h]</td><td>1...32,000</td></tr> <tr> <td>Operating temperature</td><td>[°C]</td><td>0...+50</td></tr> <tr> <td>Storage temperature</td><td>[°C]</td><td>-10...+50</td></tr> <tr> <td>Relative humidity</td><td></td><td>90% max. (non condensing) at 40°C</td></tr> <tr> <td rowspan="3">Overall dimensions</td><td>[mm]</td><td>105x90x58 DMTME</td></tr> <tr> <td>[mm]</td><td>96x96x103 DMTME-96</td></tr> <tr> <td>[mm]</td><td>72x72x90 DMTME-72</td></tr> </table>		Auxiliary supply	[V rms]	230 +15% - 10% DMTME, DMTME-72 and DMTME-96	[V rms]		400 +15% - 10% DMTME-72	[V rms]		115 +15% - 10% DMTME, DMTME-96	Frequency	[Hz]	45...55	Power consumption	[VA]	<6	Fuse protection		T0.1A	Voltage measuring inputs			Range	[V rms]	10...500 V (L-N)	Max. non destructive	[V rms]	550	Impedance (L-N)	[MW]	>8	Current measuring inputs (only external CTs .../5 A)			Range	[A rms]	0.05...5	Overload		1:1 permanent	Measurement accuracy			Voltage		±0.5% F.S. ±1 digit in range	Current		±0.5% F.S. ±1 digit in range	Active power		±1% ±0.1% F.S. from cosφ = 0.3 to cosφ = -0.3	Frequency		±0.2% ±0.1Hz from 40.0 to 99.9 Hz			±0.2% ±1Hz from 100 to 500 Hz	Energy metering			Maximum metered value for single phase		4,294.9 MWh (MVarh) with KA = KV = 1	Maximum metered value for three phase		4,294.9 MWh (MVarh) with KA = KV = 1	Accuracy		Class 1	Max. power consumption	[VA]	1.4 for each input (with I _{max} = 5A rms)	Digital outputs			Pulse duration		50 ms OFF (min)/ 50 ms ON	V _{max} on contact		48 V (d.c. or a.c. peak)	W _{max} dissipation		450 mW	Max frequency		10 pulses/sec	I _{max} contact		100 mA (d.c. or a.c. peak value)	Insulation		750 V _{max}	Programmable parameters			kV T transformer ratio V _{prim} /V _{sec}		1...500	kCT transformer ratio I _{prim} /I _{sec}		1...1,250	Free hour counter	[h]	0...10,000,000, resettable	Countdown	[h]	1...32,000	Operating temperature	[°C]	0...+50	Storage temperature	[°C]	-10...+50	Relative humidity		90% max. (non condensing) at 40°C	Overall dimensions	[mm]	105x90x58 DMTME	[mm]	96x96x103 DMTME-96	[mm]
Auxiliary supply	[V rms]	230 +15% - 10% DMTME, DMTME-72 and DMTME-96																																																																																																																											
[V rms]		400 +15% - 10% DMTME-72																																																																																																																											
[V rms]		115 +15% - 10% DMTME, DMTME-96																																																																																																																											
Frequency	[Hz]	45...55																																																																																																																											
Power consumption	[VA]	<6																																																																																																																											
Fuse protection		T0.1A																																																																																																																											
Voltage measuring inputs																																																																																																																													
Range	[V rms]	10...500 V (L-N)																																																																																																																											
Max. non destructive	[V rms]	550																																																																																																																											
Impedance (L-N)	[MW]	>8																																																																																																																											
Current measuring inputs (only external CTs .../5 A)																																																																																																																													
Range	[A rms]	0.05...5																																																																																																																											
Overload		1:1 permanent																																																																																																																											
Measurement accuracy																																																																																																																													
Voltage		±0.5% F.S. ±1 digit in range																																																																																																																											
Current		±0.5% F.S. ±1 digit in range																																																																																																																											
Active power		±1% ±0.1% F.S. from cosφ = 0.3 to cosφ = -0.3																																																																																																																											
Frequency		±0.2% ±0.1Hz from 40.0 to 99.9 Hz																																																																																																																											
		±0.2% ±1Hz from 100 to 500 Hz																																																																																																																											
Energy metering																																																																																																																													
Maximum metered value for single phase		4,294.9 MWh (MVarh) with KA = KV = 1																																																																																																																											
Maximum metered value for three phase		4,294.9 MWh (MVarh) with KA = KV = 1																																																																																																																											
Accuracy		Class 1																																																																																																																											
Max. power consumption	[VA]	1.4 for each input (with I _{max} = 5A rms)																																																																																																																											
Digital outputs																																																																																																																													
Pulse duration		50 ms OFF (min)/ 50 ms ON																																																																																																																											
V _{max} on contact		48 V (d.c. or a.c. peak)																																																																																																																											
W _{max} dissipation		450 mW																																																																																																																											
Max frequency		10 pulses/sec																																																																																																																											
I _{max} contact		100 mA (d.c. or a.c. peak value)																																																																																																																											
Insulation		750 V _{max}																																																																																																																											
Programmable parameters																																																																																																																													
kV T transformer ratio V _{prim} /V _{sec}		1...500																																																																																																																											
kCT transformer ratio I _{prim} /I _{sec}		1...1,250																																																																																																																											
Free hour counter	[h]	0...10,000,000, resettable																																																																																																																											
Countdown	[h]	1...32,000																																																																																																																											
Operating temperature	[°C]	0...+50																																																																																																																											
Storage temperature	[°C]	-10...+50																																																																																																																											
Relative humidity		90% max. (non condensing) at 40°C																																																																																																																											
Overall dimensions	[mm]	105x90x58 DMTME																																																																																																																											
	[mm]	96x96x103 DMTME-96																																																																																																																											
	[mm]	72x72x90 DMTME-72																																																																																																																											
																																																																																																																													
6 modules																																																																																																																													

Produsent	Navn	Adresse	Tlf.	E-post
	ABB AS	Bergerveien 12 1396 Billingstad	03500	automasjonsprodukter@no.abb.com