
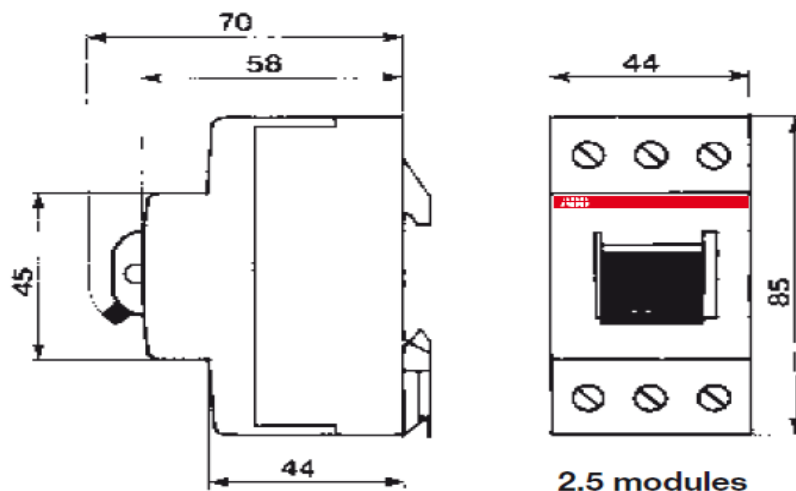


FDV dokumentasjon E463/480

E463/480	Typebetegnelse	Varenummer	EAN	El.nummer
Hovedbryter	HOVEDBRYTER 63A E 463/3-KB	2CCE160300R0131	7612270932528	1424319
	HOVEDBRYTER 63A E 463/3-SL	2CCE160301R0131	7612270932535	1424336
	HOVEDBRYTER 80A E 480/3-KB	2CCE180300R0141	7612270932542	1424337
FDV		Ingen krav til periodisk vedlikehold.		

Tekniske Data

Switching capacity	1.25 I _n ; 1.1 U _n ; cosφ = 0.6 according to DIN VDE 0632
Rated voltage	250/400 V a.c.
Connection cross section	1 mm ² stranded wire/0.5 mm ² wire up to 25 mm ²
Pick-up torque	3 Nm max.
Positive opening	according to DIN VDE 0113
Ambient temperature	-25°C to +55°C
Storage temperature	-40°C to +70°C
Poles	3 NO
Short-circuit withstanding capacity	10 kA, 400 V a.c.

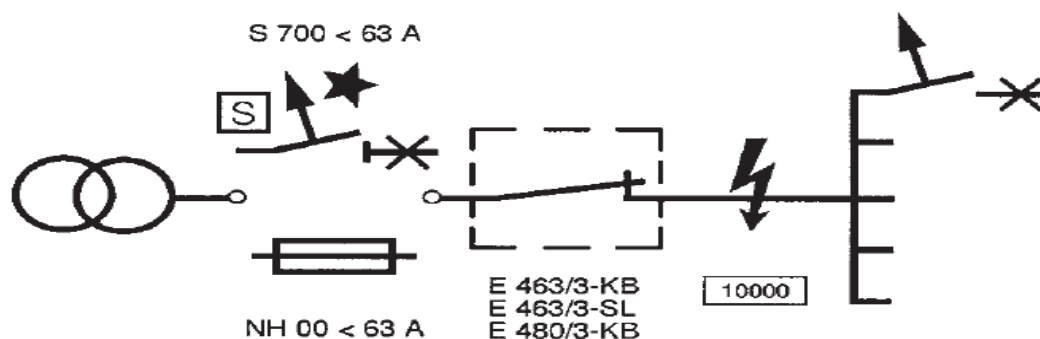

Produsent



Navn

ABB AS

Adresse

Bergerveien 12
1396 Billingstad

Tlf.

03500

E-post

automasjonsprodukter@no.abb.com