

FDV dokumentasjon

Stikk for DIN SKINNE	Typebetegnelse	Varenummer	EAN	El.nummer
	STIKK. F/DIN-SKINNE M1175-C STIKK. F/DIN-SKINNE M1175-L STIKK. F/DIN-SKINNE M1175-FL STIKK. F/DIN-SKINNE M1175	2CSM211000R0721 2CSM212000R0721 2CSM214000R0721 2CSM210000R0721	8012542029052 8012542028253 8012542028659 8012542027850	1547497 1547498 1547499 1547623
FDV		Ingen krav til periodisk vedlikehold.		

Tekniske Data

Rated voltage Un	[V]	250
Rated current In	[A]	16
Rated frequency	[Hz]	50/60
Power consumption	[W]	0,6
Modules	[n°]	2,5
Safety shutters	yes, on entire range	
Terminal type	positive safety	
Cable section (ø min./max.)	[mm²]	2.5 / 16
Tightening torque	[Nm]	1,2
Temperature		
storage	[°C]	-40 ... +70
operating	[°C]	-25 ... +35
Protection degree	IP20	
Reference standards	CEI EN 60715, CEI 23-50 (M1173), NF C 61 303 (M1174), DIN VDE 0620-1 (M1175)	
Approvals	IMQ (M1173), LCIE (M1174), CEBEC (M1174), VDE (M1175), GOST	


Technical specifications of indicator light

Type	fluorescent torpedo lamp not replaceable	
Function	signal of the presence of voltage	
Colour of light	green	
Power consumption	[W]	0:25

Technical specifications of fuse

Type	5 x 20 mm up to 6.3 A aM	
------	--------------------------	--

M1175

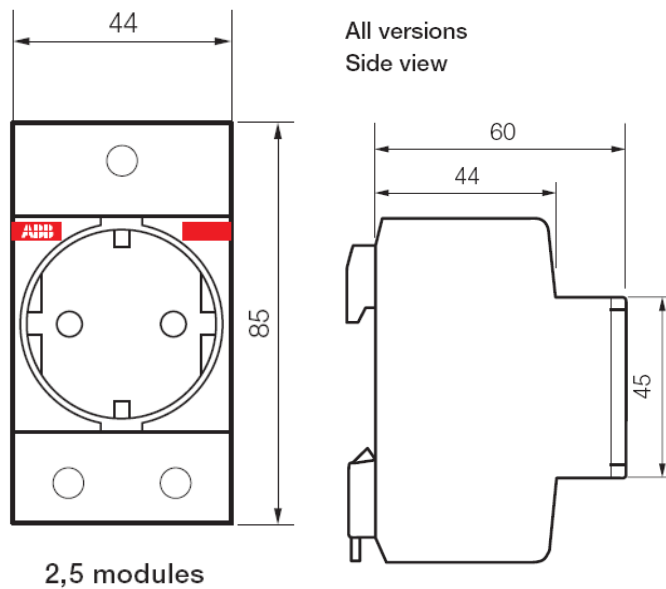

Produsent



Navn

ABBAS

Adresse

Bergerveien12
1396Billingstad

Tlf.

03500

E-post

automasjonsprodukter@no.abb.com