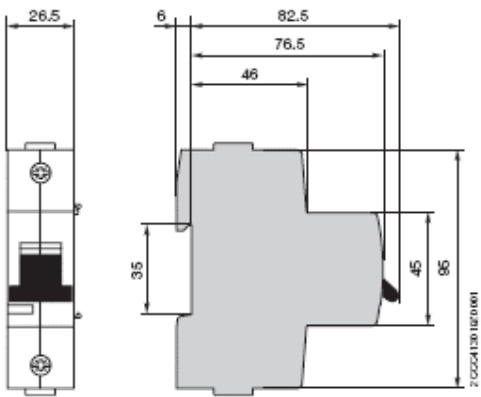


FDV dokumentasjon

Arbeidsstrøms- utløser S800-SOR	Typebetegnelse	Varenummer	EAN	El.nummer
	Arb.str.utl 12V AC/DC S800	2CCS800900R0201	7612271212070	1628850
	Arb.str.utl 24V AC/DC S800	2CCS800900R0191	7612271208318	1628851
	Arb.str.utl 48-130VAC/DC S800	2CCS800900R0221	7612271208349	1628852
	Arb.str.utl 110-250VAC/DC S800	2CCS800900R0211	7612271208332	1628853
	Arb.str.utl 220-400VAC/DC S800	2CCS800900R0231	7612271208356	1628854

FDV	Ingen krav til periodisk vedlikehold.
-----	---------------------------------------

Tekniske Data	Shunt Operation Release S800-SOR				
		S800-SOR24	S800-SOR130	S800-SOR250	S800-SOR400
Rated voltage Ue	[V AC/DC]	24	48...130	110...250	220...400/250 a
Operating range	[%] Ue	70...110			
Rated insulation voltage Ui	[V]	690			
Coil pull in consumption	[W/VA]	16.6/17 a	41.9...307.3	23...119	45...146.1
			42...310 ①	20...105 ①	
Rated frequency	[Hz]	DC; 50/60			
Pollution degree		3			
Connection Cu	[mm²]	1...25 strand			
		1...35 cable			
Tightening torque	[Nm]	min.3/ max.4			
AC/DC supply		any			
DIN top hat rail		EN 60715			
Type of protection		IP20			
		IP40 (only actuation side)			
Permissible ambient temperature of operations	[°C]	-25...+60			
Storage temperature	[°C]	-40...+70			
Resistance to vibration		IEC 60068-2-6; EN51373 Cat.1/class B			
① according to UL 489					
					

Produsent	Navn	Adresse	Tlf.	E-post
	ABB AS	Bergerveien 12 1396 Billingstad	03500	automasjonsprodukter@no.abb.com