

FDV dokumentasjon

Automater	Typebetegnelse	El.nummer
S800S B karakteristikk	Automat S801S-B6	2CCS861001R0065 1628400
	Automat S801S-B8	2CCS861001R0085 1628401
	Automat S801S-B10	2CCS861001R0105 1628700
	Automat S801S-B13	2CCS861001R0135 1628701
	Automat S801S-B16	2CCS861001R0165 1628702
	Automat S801S-B20	2CCS861001R0205 1628703
	Automat S801S-B25	2CCS861001R0255 1628704
	Automat S801S-B32	2CCS861001R0325 1628705
	Automat S801S-B40	2CCS861001R0405 1628706
	Automat S801S-B50	2CCS861001R0505 1628707
	Automat S801S-B63	2CCS861001R0635 1628708
	Automat S801S-B80	2CCS861001R0805 1628709
	Automat S801S-B100	2CCS861001R0825 1628710
	Automat S801S-B125	2CCS861001R0845 1665811
	Automat S802S-B6	2CCS862001R0065 1628402
	Automat S802S-B8	2CCS862001R0085 1628403
	Automat S802S-B10	2CCS862001R0105 1628712
	Automat S802S-B13	2CCS862001R0135 1628713
	Automat S802S-B16	2CCS862001R0165 1628714
	Automat S802S-B20	2CCS862001R0205 1628715
	Automat S802S-B25	2CCS862001R0255 1628716
	Automat S802S-B32	2CCS862001R0325 1628717
	Automat S802S-B40	2CCS862001R0405 1628718
	Automat S802S-B50	2CCS862001R0505 1628719
	Automat S802S-B63	2CCS862001R0635 1628720
	Automat S802S-B80	2CCS862001R0805 1628721
	Automat S802S-B100	2CCS862001R0825 1628722
	Automat S802S-B125	2CCS862001R0845 1665823
	Automat S803S-B6	2CCS863001R0065 1628404
	Automat S803S-B8	2CCS863001R0085 1628405
	Automat S803S-B10	2CCS863001R0105 1628724
	Automat S803S-B13	2CCS863001R0135 1628725
	Automat S803S-B16	2CCS863001R0165 1628726
	Automat S803S-B20	2CCS863001R0205 1628727
	Automat S803S-B25	2CCS863001R0255 1628728
	Automat S803S-B32	2CCS863001R0325 1628729
	Automat S803S-B40	2CCS863001R0405 1628730
	Automat S803S-B50	2CCS863001R0505 1628731
	Automat S803S-B63	2CCS863001R0635 1628732
	Automat S803S-B80	2CCS863001R0805 1628733
	Automat S803S-B100	2CCS863001R0825 1628734
	Automat S803S-B125	2CCS863001R0845 1665835
	Automat S804S-B6	2CCS864001R0065 1628406
	Automat S804S-B8	2CCS864001R0085 1628407
	Automat S804S-B10	2CCS864001R0105 1628736
	Automat S804S-B13	2CCS864001R0135 1628737
	Automat S804S-B16	2CCS864001R0165 1628738
	Automat S804S-B20	2CCS864001R0205 1628739
	Automat S804S-B25	2CCS864001R0255 1628740
	Automat S804S-B32	2CCS864001R0325 1628741
	Automat S804S-B40	2CCS864001R0405 1628742
	Automat S804S-B50	2CCS864001R0505 1628743
	Automat S804S-B63	2CCS864001R0635 1628744
	Automat S804S-B80	2CCS864001R0805 1628745
	Automat S804S-B100	2CCS864001R0825 1628746
	Automat S804S-B125	2CCS864001R0845 1665847



FDV

Automatene er produsert og testet i henhold til IEC/EN 60898-1, IEC/EN 60947-2

Ingen krav til periodisk vedlikehold.

Tekniske Data

TEKNISKE DATA		S800 S			
Characteristics available		B, C, D	K	KM	UCB, UCK
Max. rated continuous current I _n	[A]	10...125	10...125	20...63	10...125
Poles		1...4	1...4	3	1...4
Rated operating voltage U _e					
(AC) 50/60Hz	[V]	400/690	400/690	400/690	-
(DC)/pole	[V]	-	-	-	250
Rated insulation voltage U _i	[V]	690	690	690	250 ²
Rated impulse withstand voltage U _{imp}	[kV]	8	8	8	8
Ultimate short-circuit breaking capacity I _{sc} in accordance with IEC 60947-2					
(AC) 50/60Hz 240/415V	[kA]	50	50	50	-
(AC) 50/60Hz 254/440V (10...80A)	[kA]	30	30	30	-
(AC) 50/60Hz 254/440V (100...125A)	[kA]	30	30	30	-
(AC) 50/60Hz 289/500V (10...63A)	[kA]	15	15	15	-
(AC) 50/60Hz 289/500V (80A)	[kA]	15	15	15	-
(AC) 50/60Hz 289/500V (100...125A)	[kA]	10	10	10	-
(AC) 50/60Hz 400/690V (10...80A)	[kA]	6	6	6	-
(AC) 50/60Hz 400/690V (100...125A)	[kA]	4.5	4.5	4.5	-
(DC) 250V (1-pole)	[kA]	-	-	-	50
(DC) 500V (2-pole)	[kA]	-	-	-	50
(DC) 750V (3-pole)	[kA]	-	-	-	50
(DC) 750V (4-pole)	[kA]	-	-	-	50
Rated short-circuit breaking capacity I _{sc} EN 60898-1					
(AC) 50/60Hz 240/415V (up to 80A)	[kA]	25	-	-	-
Service short-circuit breaking capacity I _{sc} in accordance with IEC 60947-2					
(AC) 50/60Hz 240/415V	[kA]	40	40	40	-
(AC) 50/60Hz 254/440V (10...80A)	[kA]	22.5	22.5	22.5	-
(AC) 50/60Hz 254/440V (100...125A)	[kA]	15	15	15	-
(AC) 50/60Hz 289/500V (10...63A)	[kA]	11	11	11	-
(AC) 50/60Hz 289/500V (80A)	[kA]	8	8	8	-
(AC) 50/60Hz 289/500V (100...125A)	[kA]	5	5	5	-
(AC) 50/60Hz 400/690V (10...80A)	[kA]	4	4	4	-
(AC) 50/60Hz 400/690V (100...125A)	[kA]	3	3	3	-
(DC) 250V (1-pole)	[kA]	-	-	-	50
(DC) 500V (2-pole)	[kA]	-	-	-	50
(DC) 750V (3-pole)	[kA]	-	-	-	50
(DC) 750V (4-pole)	[kA]	-	-	-	50
Service short-circuit breaking capacity I _{sc} in accordance with EN 60898-1					
(AC) 50/60Hz 240/415V (up to 80A)	[kA]	12.5	-	-	-
Rated frequency	[Hz]	50/60, (16 2/3) ¹	50/60, (16 2/3) ¹	50/60	-
Total breaking time (240/415V; 50kA)	[ms]			≤ 2.5	
Mounting position				any	
Disconnecter properties according to IEC 60947-2				yes	
Standards				IEC 60947-2	
Connections CU (10...32A)	[mm ²]	EN 60898-1			
		1...25 strand	1...25 strand	1...25 strand	1...25 strand
		1...35 cable	1...35 cable	1...35 cable	1...35 cable
Connections CU (40...125A)	[mm ²]				
		6...50 strand	6...50 strand	6...50 strand	6...50 strand
		6...70 cable	6...70 cable	6...70 cable	6...70 cable
Tightening torque	[Nm]			min. 3 / max. 4	
AC/DC supply				any	
Mounting on DIN top hat rail				EN 60715	
Permissible ambient temperature for operations	[°C]			-25...+60	
Storage temperature	[°C]			-40...+70	
Type of protection				IP20	
				IP40 (only actuation side)	
Classification in accordance with NF-16-101, NF16-102				I3F2	
Resistance to vibration				IEC 60068-2-27; IEC 60068-2; EN 61373 Cat.1/class B	

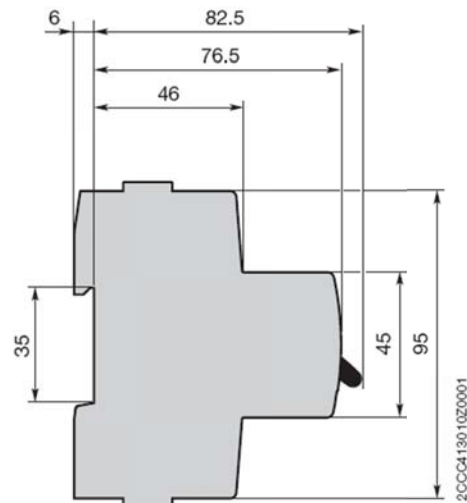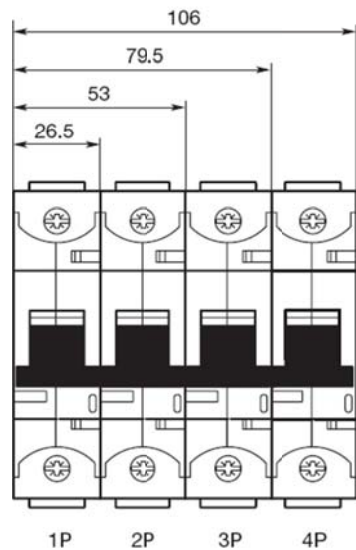

2CCC413010Z0001







Tekniske Data

Tripping characteristic S800

Acc. to	Tripping characteristic and rated current		Thermal release ②			Electromagnetic release ①			
			Current conventional non-tripping current	conventional tripping current	Tripping time	Current hold current surges	trip at least at	Tripping time	
IEC/EN 60898-1	B	10 to 80 A	$1.13 \cdot I_n$	$1.45 \cdot I_n$	$> 1 \text{ h}$ $< 1 \text{ h}$	$3 \cdot I_n$	$5 \cdot I_n$	$> 0.1 \text{ s}$ $< 0.1 \text{ s}$	
	C	10 to 80 A	$1.13 \cdot I_n$	$1.45 \cdot I_n$	$> 1 \text{ h}$ $< 1 \text{ h}$	$5 \cdot I_n$	$10 \cdot I_n$	$> 0.1 \text{ s}$ $< 0.1 \text{ s}$	
	D	10 to 80 A	$1.13 \cdot I_n$	$1.45 \cdot I_n$	$> 1 \text{ h}$ $< 1 \text{ h}$	$10 \cdot I_n$	$20 \cdot I_n$	$> 0.1 \text{ s}$ $< 0.1 \text{ s}$	
IEC/EN 60947-2	B	6 to 125 A	$1.05 \cdot I_n$	$1.3 \cdot I_n$	$> 1 \text{ h}$ $< 1 \text{ h}$	$3.2 \cdot I_n$	$4.8 \cdot I_n$	$> 0.1 \text{ s}$ $< 0.1 \text{ s}$	
	C	6 to 125 A	$1.05 \cdot I_n$	$1.3 \cdot I_n$	$> 1 \text{ h}$ $< 1 \text{ h}$	$6.4 \cdot I_n$	$9.6 \cdot I_n$	$> 0.1 \text{ s}$ $< 0.1 \text{ s}$	
	D	6 to 125 A	$1.05 \cdot I_n$	$1.3 \cdot I_n$	$> 1 \text{ h}$ $< 1 \text{ h}$	$10.4 \cdot I_n$	$15.6 \cdot I_n$	$> 0.1 \text{ s}$ $< 0.1 \text{ s}$	
	K	6 to 125 A	$1.05 \cdot I_n$	$1.2 \cdot I_n$	$> 1 \text{ h}$ $< 1 \text{ h}$	$10.4 \cdot I_n$	$15.6 \cdot I_n$	$> 0.1 \text{ s}$ $< 0.1 \text{ s}$	
	KM	20 to 80 A				$10.4 \cdot I_n$	$15.6 \cdot I_n$	$> 0.1 \text{ s}$ $< 0.1 \text{ s}$	
	UCB (DC only)	10 to 125 A	$1.05 \cdot I_n$	$1.3 \cdot I_n$	$> 1 \text{ h}$ $< 1 \text{ h}$	$4.0 \cdot I_n$	$7.2 \cdot I_n$	$> 0.1 \text{ s}$ $< 0.1 \text{ s}$	
	UCK (DC only)	10 to 125 A	$1.05 \cdot I_n$	$1.2 \cdot I_n$	$> 1 \text{ h}$ $< 1 \text{ h}$	$8.8 \cdot I_n$	$13.2 \cdot I_n$	$> 0.1 \text{ s}$ $< 0.1 \text{ s}$	
	PV-S (DC only)	10 to 125 A	$1.05 \cdot I_n$	$1.3 \cdot I_n$	$> 1 \text{ h}$ $< 1 \text{ h}$	$4.0 \cdot I_n$	$6 \cdot I_n$	$> 0.1 \text{ s}$ $< 0.1 \text{ s}$	
	UL489	Z	10 to 100 A	$1 \cdot I_n$	$1.35 \cdot I_n$	$> 1 \text{ h}$ $< 1 \text{ h}$	$3.2 \cdot I_n$	$4.8 \cdot I_n$	$> 0.1 \text{ s}$ $< 0.1 \text{ s}$
		K	10 to 100 A	$1 \cdot I_n$	$1.35 \cdot I_n$	$> 1 \text{ h}$ $< 1 \text{ h}$	$6.4 \cdot I_n$	$9.6 \cdot I_n$	$> 0.1 \text{ s}$ $< 0.1 \text{ s}$
UCZ (DC only)		10 to 80 A	$1 \cdot I_n$	$1.35 \cdot I_n$	$> 1 \text{ h}$ $< 1 \text{ h}$	$8.8 \cdot I_n$	$13.2 \cdot I_n$	$> 0.1 \text{ s}$ $< 0.1 \text{ s}$	
UL489B	PV-S (DC only)	5 A	$1.13 \cdot I_n$		$> 1 \text{ h}$ $< 1 \text{ h}$	$4.0 \cdot I_n$		$> 0.1 \text{ s}$ $< 0.1 \text{ s}$	
			$1.3 \cdot I_n$				$6 \cdot I_n$	$< 0.1 \text{ s}$	

① The indicated electromagnetic tripping values apply to a frequency of 50/60 Hz.

② The thermal release are calibrated to a nominal reference ambient temperature; for B, C, D, UCB and PVB it is 30 °C, for K, UCK it is 20 °C for Z, K and UCZ it is 25 °C, for PVB acc. to UL489B it is 50 °C.

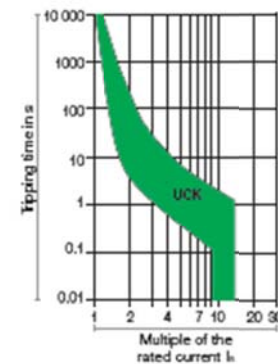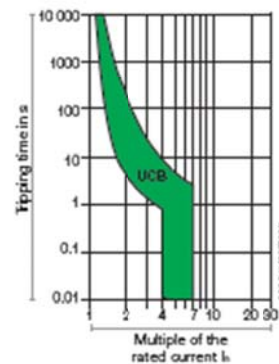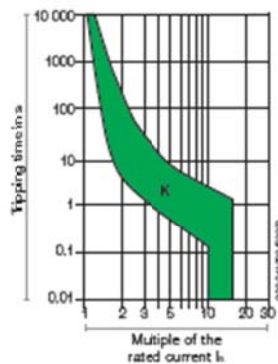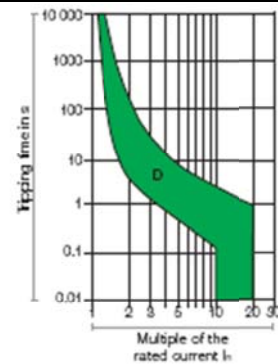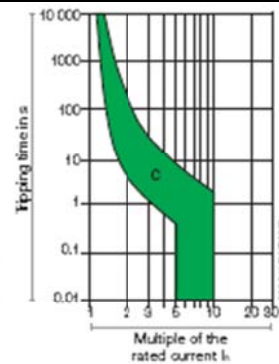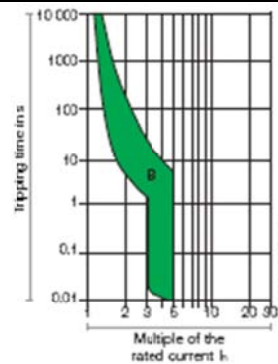

Produsent

Navn

Adresse

Tlf.

E-post

ABB AS

Bergerveien 12
1396 Billingstad

03500

automasjonsprodukter@no.abb.com