









3 - polet: NZMN4-...

Effektbryter I_r: 400 - 800 A I_i: 1600 -9600
NZMN4-VE800 - 4358938



Tilleggsutstyr:

	Type	EL.nr.
	NZM4-XDV	4358954
	NZM4-XTVD	4358955
	NZM4-XTVDVR	4358956
	NZM3/4-XV4	4358802
	NZM3/4-XV6	4358801
	M22-K01	4355364
	M22-K10	4355363
	NZM4-XHIV	4358957

Teknisk informasjon:

Ik max: Icu = 50 kA, Ics = 37kA (230V)

I2: 1,3 x In

li: Se beskrivelse

Bolttilkobling

Komplett effektbryter, 125 ...630 A

Maks: 690 V 50/60 Hz. EN 60947

Leveres standard med bolttilkobling

for Cu. Grep følger bryteren.

I_2 = høyeste prøvestrøm


I_i = elektromagnetisk utløserstrøm

I_{sd} = forsinket el.magn. utløserstrøm

VE-type = elektronisk forsinket vern

ME-type=elektronisk fors. motorvern

NZMN4, NZMH4, N4

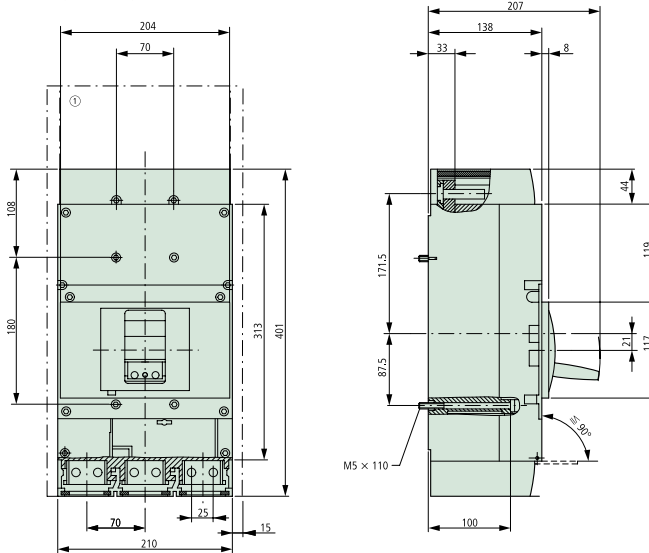

Anleggs-, kabel-, selektiv- og generatorvern med NZM4

