




Part no. : 193A

Connector ProTOP

with cable gland with integral protection against kinking. Front and cover fitted with thread lock and safety slide.

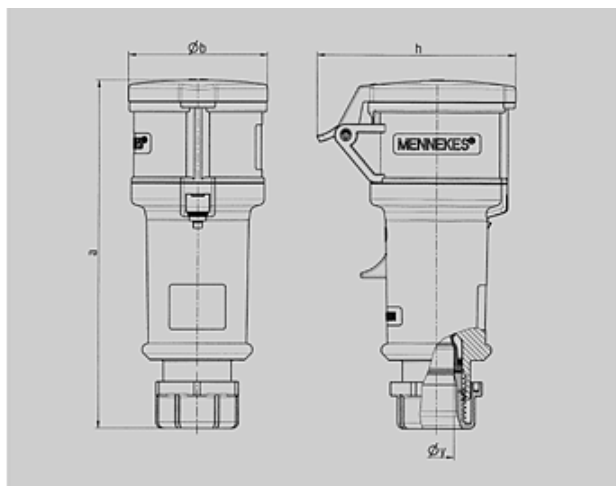

Drawing	Amp.	16			32	
		3	4	5	5	
3 MB 60	Poles					
Dim. in mm	a	160	174	172		210
	b	57	61	69		80
	h	83	92	98		108
	y	16	16	16		22
Terminal for cond. cross section (mm²) min.-max.		1	1	1		2,5
		—2,5	—2,5	—2,5		—6

Article-group : **3197**

voltages : 230V

rated current : 16A

pole : 4 pole

IP protection types : 44

position of ground contact : 9h

packing unit : 0010

weight : 213 g

PART NUMBERS

		V	110V	230V	400V	500V	>50-500V	
		Hz	50,60	50,60	50,60	50,60	100-300	300-500
		colour						
		amp.						
16 A	3		179A	180A	181A		201	
	4		202	193A	194A	195A	308	309
	5			199A	15A	310	312	313
32 A	3		121	122				
	4			125	126	127	314	
	5			645	16A	646		