




Part no. : 14105

Connector PowerTOP Xtra

rubberised handle area,

with SoftCONTACT,

highly heat-resistant contact carrier, frame terminals, cable gland and sealing, strain relief and protection against kinking, enclosure with thread lock, two safety slides

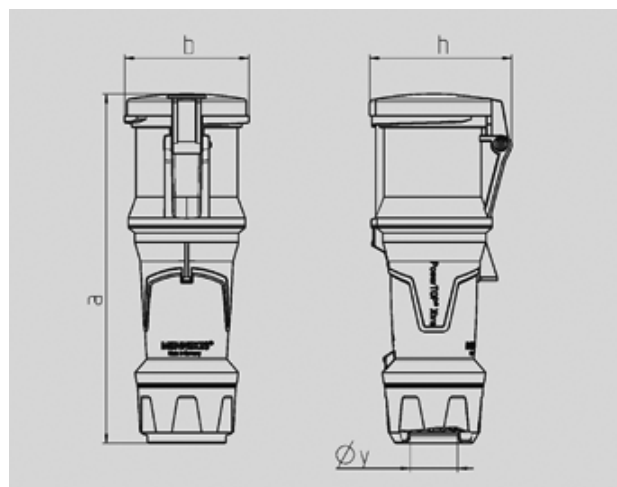

Drawing 3 MB 69	Amp. Poles	63		
		3	4	5
Dim. in mm	a	268	268	268
	b	95	95	95
	h	109	109	109
	y	36	36	36
Terminal for cond. cross		6	6	6
section (mm²) min.-max.		—16	—16	—16

Article-group : **3215**

voltages : 230V

rated current : 63A

pole : 4 pole

IP protection types : 44

position of ground contact : 9h

weight : 0

PART NUMBERS

	V	110V	230V	400V	500V	>50-500V	
	Hz	50,60	50,60	50,60	50,60	100-300	300-500
	colour						
	amp.						
63 A	3	14101	14102				
	4		14105	14106	14107		
	5		14111	14112			