




Part no. : 356

Wall mounted inlet

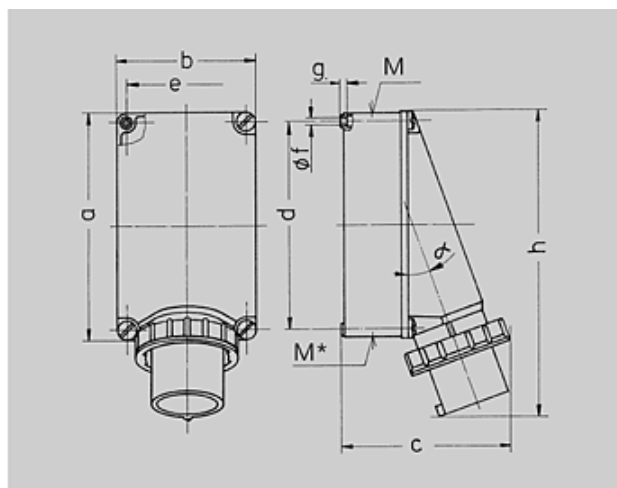

Drawing	Amp.	63			125	
2 MB 36	Poles	3	4	5	4	5
Dim. in mm	a	170	170	170	264	264
	b	118	118	118	163	163
	c	171	171	171	205	205
	d	136	136	136	240	240
	e	104	104	104	140	140
	f	6,1	6,1	6,1	8,1	8,1
	g	6	6	6	8	8
	h	250	250	250	355	355
	M	40	40	40	50	50
	M*	2x40	2x40	2x40	50	50
	α	25°	25°	25°	20°	20°
	Max. cabel diam. (mm)		32	32	32	38
Terminal for cond. cross section (mm²) min.-max.		4 —10	4 —10	4 —10	16 —35	16 —35

Article-group : **2048**

voltages : 230V

rated current : 63A

pole : 4 pole

IP protection types : IP67

position of ground contact : 9h

packing unit : 0005

weight : 855 g

PART NUMBERS

		V	110V	230V	400V	500V	>50-500V
		Hz	50,60	50,60	50,60	50,60	100-300 300-500
		colour					
		amp.					
63 A	3		1216	1107	1217		
	4		355	356	357	358	
	5		359	360	361		
125 A	4		362	363	364	365	
	5		366	367	368		