




Part no. : 1385

Panel mounted receptacle

for cable ducts and flush mounted installation boxes

32A, 3P and 4P, suitable only for installation in flush mounted boxes 40369 and 40374

with uniform flange dimensions and uniform fixing dimensions

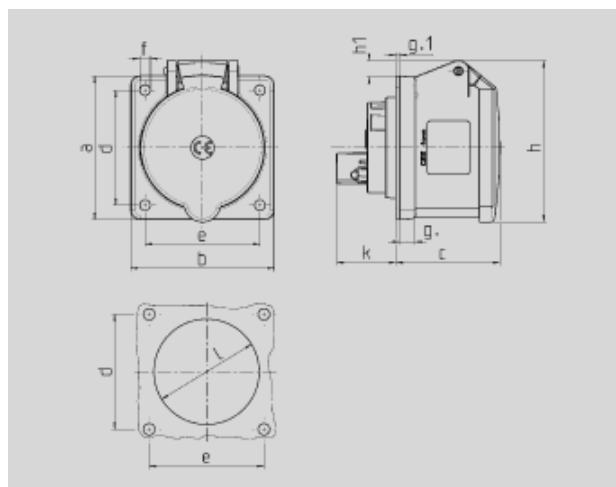

Drawing 1 MB 247	Amp. Poles	16			32		
		3	4	5	3	4	5
Dim. in mm	a	75	75	75	75	75	75
	b	75	75	75	75	75	75
	c	53	53	55	64	64	65
	d	60	60	60	60	60	60
	e	60	60	60	60	60	60
	f	5.5	5.5	5.5	5.5	5.5	5.5
	g	8	8	8	8	8	8
	g.1	2	2	2	2	2	2
	h	75	80	83	89	89	100
	h1		6	8	11	11	12
	k	31	32	32	39	39	39
	l	43	52	54	58	58	62
Terminal for cond. cross section (mm²) min.-max.		1.5 —4	1.5 —4	1.5 —4	2.5 —10	2.5 —10	2.5 —10

Article-group : **1056**

voltages : 400V

rated current : 16A

pole : 5 pole

IP protection types : IP44

position of ground contact : 6h

packing unit : 0010

weight : 178 g

PART NUMBERS

	V Hz	110V 50,60	230V 50,60	400V 50,60	500V 50,60	>50-500V 100-300 300-500	
	colour amp.						
16 A	3	1365	1366	1367		3054	3055
	4	1388	1389	1390	1391	1392	1393
	5	1384	1386	1385	3057	3059	3060
32 A	3	1394	1395	1396			
	4	1397	1398	1399	1400	1401	1402
	5	3449	3454	3451	3452	3455	3447